


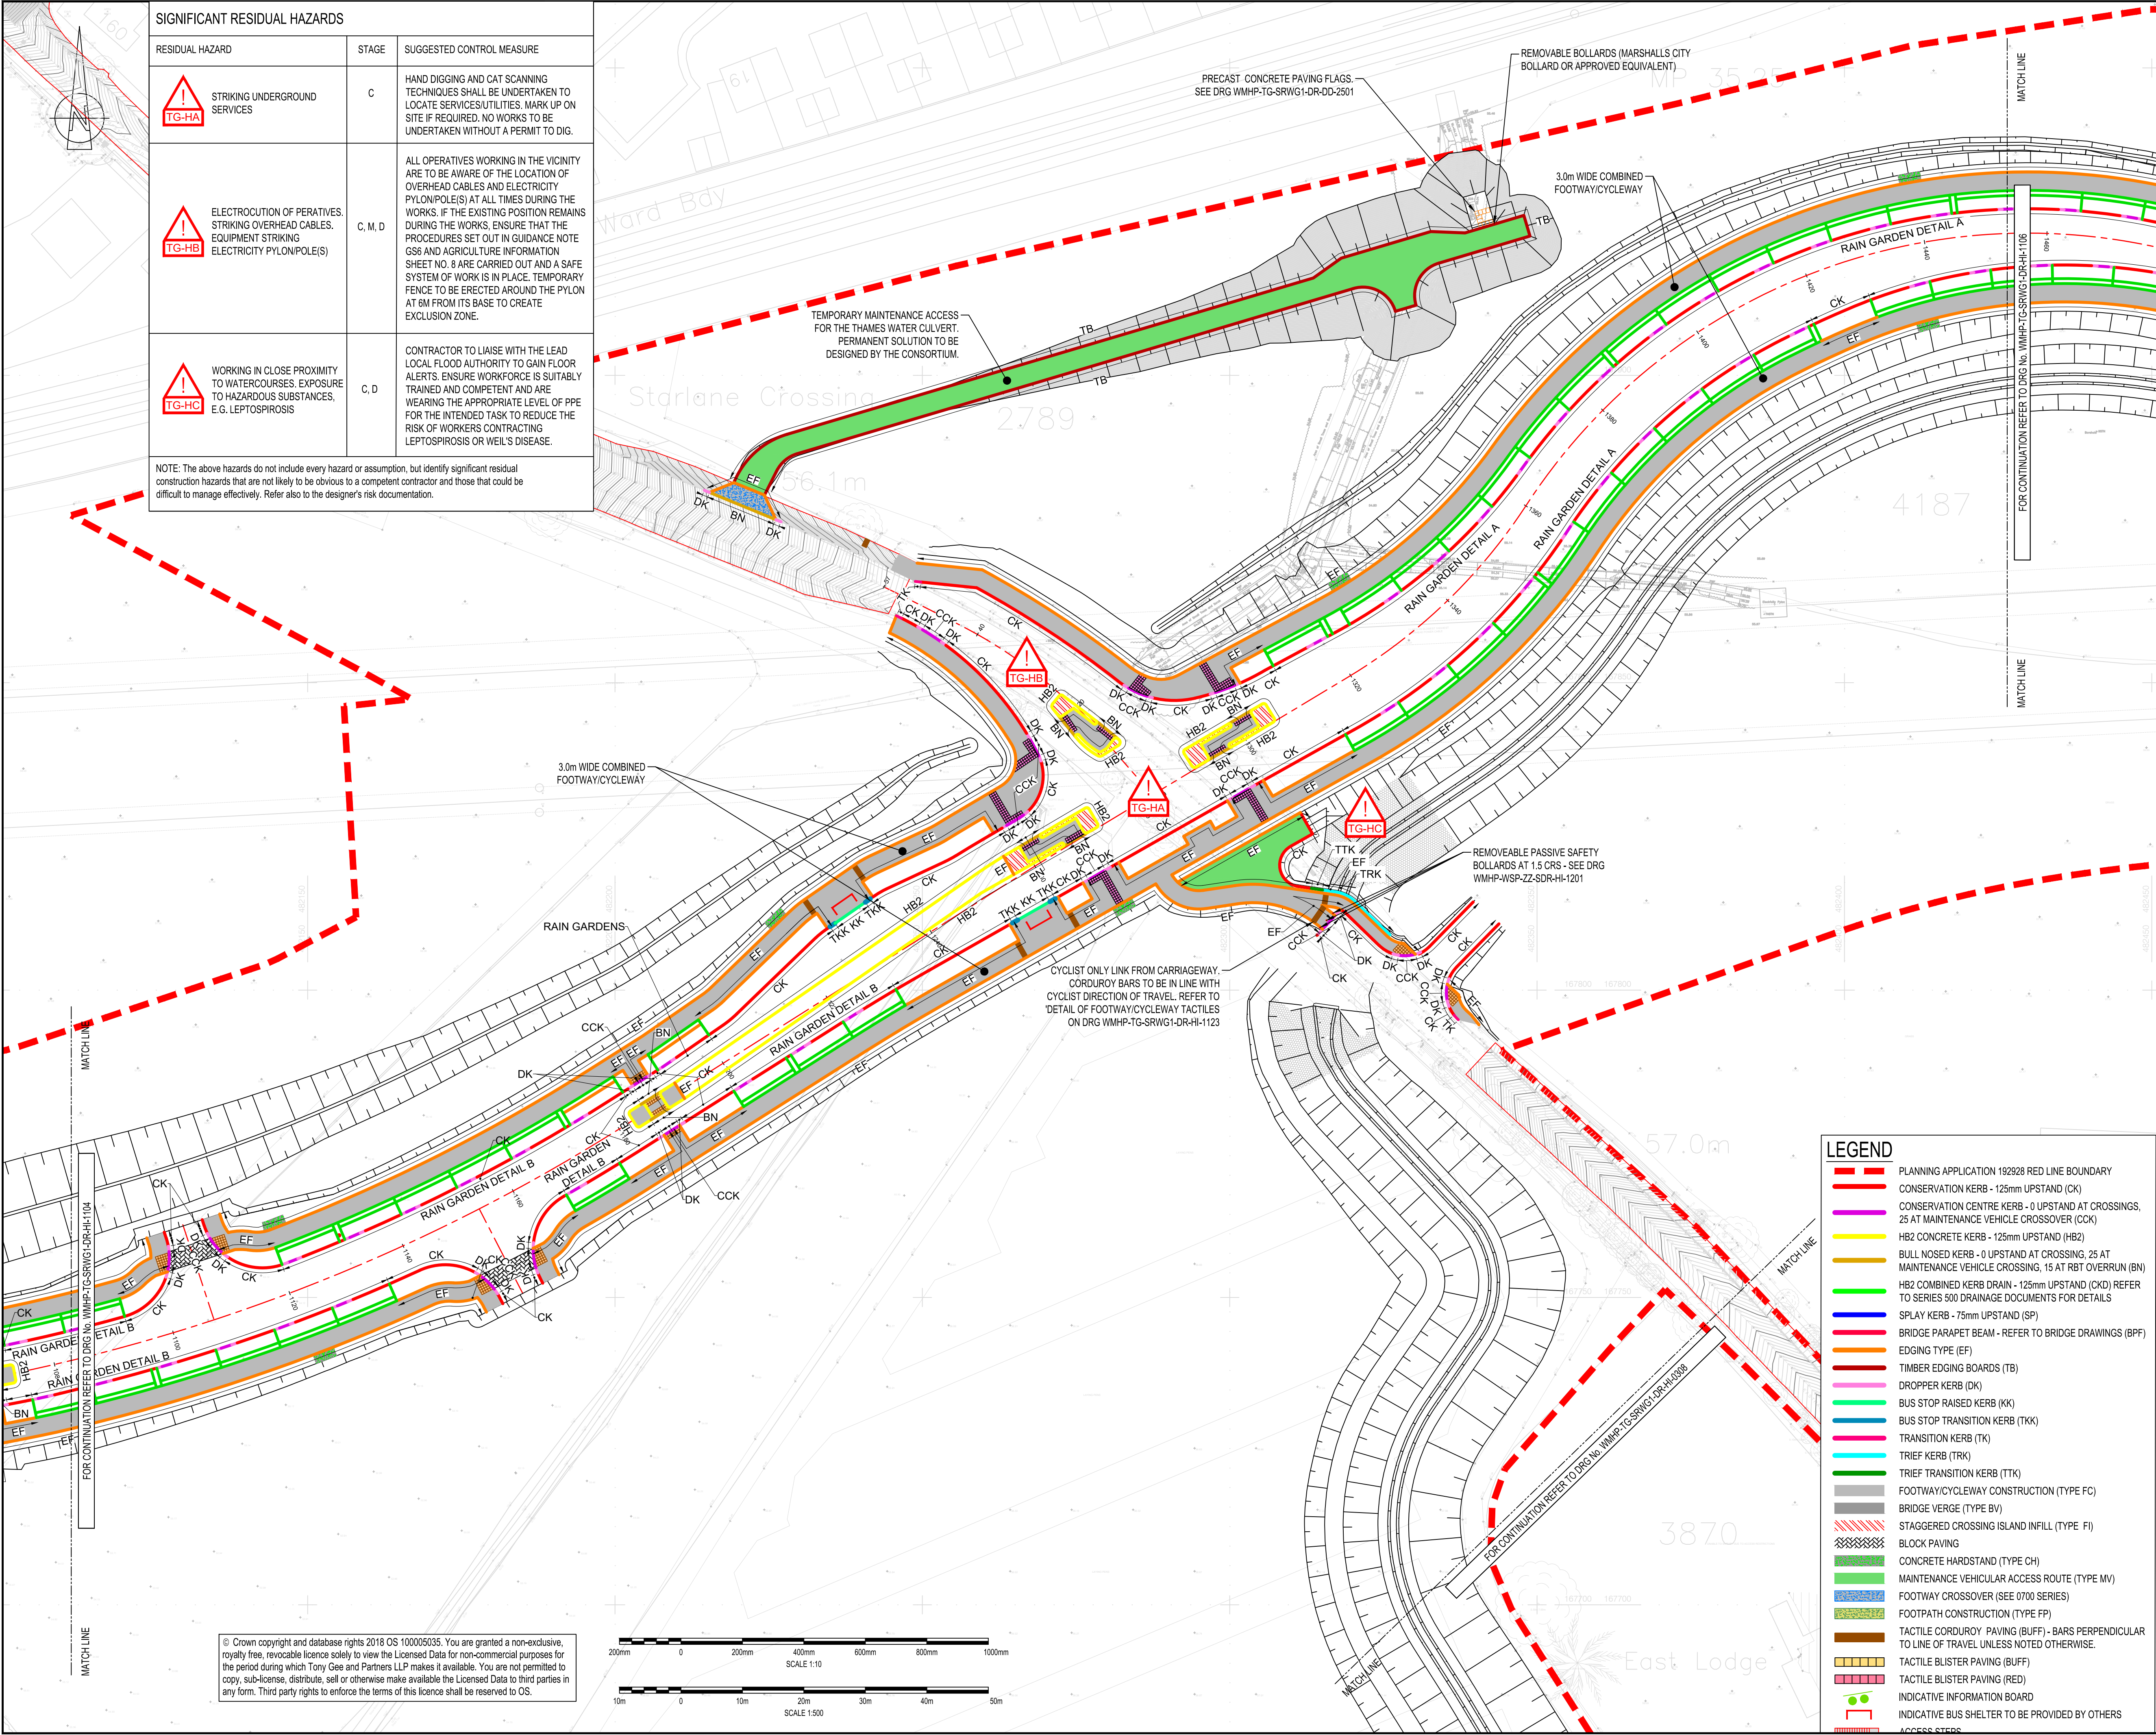

| SIGNIFICANT RESIDUAL HAZARDS                                                                                                                                                                                                                                                                    |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RESIDUAL HAZARD                                                                                                                                                                                                                                                                                 | STAGE   | SUGGESTED CONTROL MEASURE                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| STRIKING UNDERGROUND SERVICES                                                                                                                                                                                                                                                                   | C       | HAND DIGGING AND CAT SCANNING TECHNIQUES SHALL BE UNDERTAKEN TO LOCATE SERVICES/UTILITIES. MARK UP ON SITE IF REQUIRED. NO WORKS TO BE UNDERTAKEN WITHOUT A PERMIT TO DIG.                                                                                                                                                                                                                                                                                    |
| ELECTROCUTION OF PERATIVES. STRIKING OVERHEAD CABLES. EQUIPMENT STRIKING ELECTRICITY PYLON/POLE(S)                                                                                                                                                                                              | C, M, D | ALL OPERATIVES WORKING IN THE VICINITY ARE TO BE AWARE OF THE LOCATION OF OVERHEAD CABLES AND ELECTRICITY PYLON/POLE(S) AT ALL TIMES DURING THE WORKS. IF THE EXISTING POSITION REMAINS DURING THE WORKS, ENSURE THAT THE PROCEDURES SET OUT IN GUIDANCE NOTE GS6 AND AGRICULTURE INFORMATION SHEET NO. 8 ARE CARRIED OUT AND A SAFE SYSTEM OF WORK IS IN PLACE. TEMPORARY FENCE TO BE ERECTED AROUND THE PYLON AT 6M FROM ITS BASE TO CREATE EXCLUSION ZONE. |
| WORKING IN CLOSE PROXIMITY TO WATERCOURSES, EXPOSURE TO HAZARDOUS SUBSTANCES, E.G. LEPTOSPIROSIS                                                                                                                                                                                                | C, D    | CONTRACTOR TO LIAISE WITH THE LEAD LOCAL FLOOD AUTHORITY TO GAIN FLOOD ALERTS. ENSURE WORKFORCE IS SUITABLY TRAINED AND COMPETENT AND ARE WEARING THE APPROPRIATE LEVEL OF PPE FOR THE INTENDED TASK TO REDUCE THE RISK OF WORKERS CONTRACTING LEPTOSPIROSIS OR WEIL'S DISEASE.                                                                                                                                                                               |
| NOTE: The above hazards do not include every hazard or assumption, but identify significant residual construction hazards that are not likely to be obvious to a competent contractor and those that could be difficult to manage effectively. Refer also to the designer's risk documentation. |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

DO NOT SCALE

NOTES:  
1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.  
2. ALL LEVELS ARE IN METRES AOD UNLESS NOTED OTHERWISE.  
3. DRAWING TO BE READ IN CONJUNCTION WITH SPECIFICATION WMHP-TG-SRWG1-SP-HI-1101.  
4. REFER TO DRAWING WMHP-TG-SRWG1-DR-HI-1121 FOR KERB DETAILS.  
5. REFER TO DRAWING WMHP-TG-SRWG1-DR-HI-1122 FOR FOOTWAY CONSTRUCTION AND SURFACING DETAILS.  
6. REFER TO DRAWING WMHP-TG-SRWG1-DR-HI-1123 AND WMHP-TG-SRWG1-DR-HI-1124 FOR DETAILS OF TACTILE PAVING.  
7. FOR DETAILS OF COMBINED KERB DRAINAGE UNITS REFER TO 500 SERIES.  
8. REFER TO DRAWING WMHP-TG-SRWG1-DR-HI-1125 FOR RAIN GARDEN DETAILS.  
9. FOR RAIN GARDEN KERB LAYOUT REFER TO INSET A.

SHEET LOCATION PLAN  
N.T.S.

SWDR - SPINE ROAD AND WESTERN GATEWAY PHASE 1

|     |            |    |                                              |     |     |
|-----|------------|----|----------------------------------------------|-----|-----|
| P06 | 28/02/2025 | NL | REVISED FOR PLANNING DISCHARGE               | DJF | JC  |
| P05 | 02/09/2022 | HD | MATTERS OUTSTANDING WMHP-TG-SRWG1-RG-DM-0010 | BH  | JC  |
| P04 | 01/04/2022 | MH | REVISED FOR PLANNING DISCHARGE               | JC  | ARL |
| REV | DATE       | BY | DESCRIPTION                                  | CHK | APP |

DRAWING STATUS: PARTIALLY SIGNED-OFF B

DESIGNER:  
  
Tony Gee and Partners LLP  
Hardy House  
140 High Street  
Esher, Surrey  
KT10 9QJ  
Tel: 01372 461600  
www.tonygee.com  
Consulting Civil, Structural and Geotechnical Engineers

CONTRACTOR:

CLIENT:  
  
WOKINGHAM BOROUGH COUNCIL  
Shute End, Wokingham, Berkshire RG40 1BN  
Tel: (0118) 974 6000 Web: www.wokingham.gov.uk

PROJECT:  
WOKINGHAM MAJOR HIGHWAYS PROGRAMME  
SPINE ROAD AND WESTERN GATEWAY PHASE 1

TITLE:  
HIGHWAYS  
KERBS AND FOOTWAY  
PLAN LAYOUT  
SHEET 5

|                                         |                  |                 |
|-----------------------------------------|------------------|-----------------|
| SCALE @ A1:<br>1:500                    | CHECKED:<br>BH   | APPROVED:<br>JC |
| PROJECT NO:<br>C123061                  | DESIGNED:<br>MH  | DRAWN:<br>TCH   |
| DRAWING NO:<br>WMHP-TG-SRWG1-DR-HI-1105 | DATE:<br>June 21 | REV:<br>P06     |

File name: P:\BOLTON\PROJECTS\2020\8621\19047\BOLTON\DRAWINGS\WMHP-TG-SRWG1-DR-HI-1105.DWG, printed on 28 February 2025 15:07:54, by Niall Loughery

© Crown copyright and database rights 2018 OS 100005035. You are granted a non-exclusive, royalty free, revocable licence solely to view the Licensed Data for non-commercial purposes for the period during which Tony Gee and Partners LLP makes it available. You are not permitted to copy, sub-license, distribute, sell or otherwise make available the Licensed Data to third parties in any form. Third party rights to enforce the terms of this licence shall be reserved to OS.

