

3.912

DETAILS TO COMPLY WITH CONDITIONS

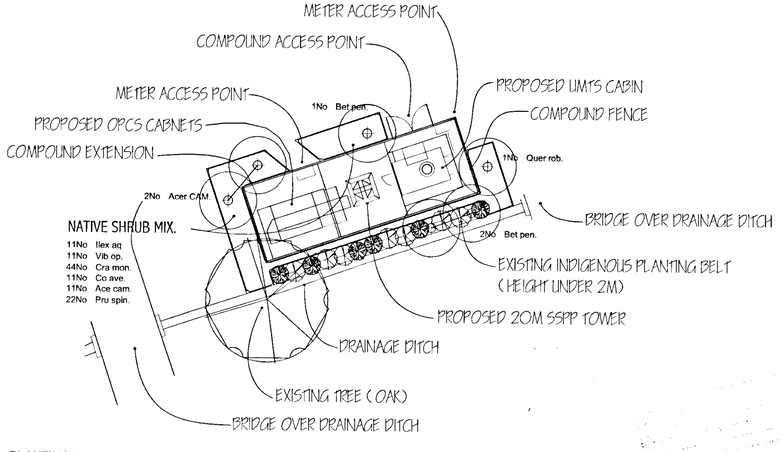


**PLANTING PLAN 1:200.**



| PLANT SCHEDULE. | | | | | | |
|---|---|---|---|---|---|---|
| NO. | PLANT NAME | SIZE | TYPE | ABBREVIATED TEXT | DENSITY | PROTECTION. |
| 11 | Acer campestre | 600-900mm | wh | Ace cam. | 2/m² | 150mm high 185mm dia green shrub shelter. |
| 2 | Acer campestre | 8-10cm | st | Acer CAM. | | |
| 3 | Betula pendula | 8-10cm | st | Bet pen. | | |
| 11 | Corylus avellana. | 600-900mm | wh | Co ave. | 2/m² | 150mm high 185mm dia green shrub shelter. |
| 44 | Crateagus monogyna. | 600-900mm | wh | Cra mon. | 2/m² | 150mm high 185mm dia green shrub shelter. |
| 11 | Ilex aquifolium. | 300-450mm | cg | Ilex aq | 2/m² | 600mm high 450mm dia green net tube. |
| 22 | Prunus spinosa | 600-900mm | wh | Pru spin. | 2/m² | 150mm high 185mm dia green shrub shelter. |
| 1 | Quercus robur | 8-10cm | st | Quer rob. | | |
| 11 | Viburnum opulus | 600-900mm | wh | Vib op. | 2/m² | 150mm high 185mm dia green shrub shelter. |

NOTE:

All shelters supported with chestnut canes.

TOTAL PLANTS = 116

**NOTES.**

ALL PLANT MATERIAL TO CONFORM TO B.S. 3936:1992
ALL PLANTING OPERATIONS TO BE IN ACCORDANCE WITH B.S.4428:1989
PROVIDE TEMPORARY STOCK PROOF PROTECTIVE FENCING AROUND PERIMETER OF PLANTING BELT UNTIL VEGETATION ESTABLISHED (MIN. 5 YEARS)
FOR LOCATION OF COMPOUND WITHIN SURROUNDING ENVIRONS REFER TO DRAWING NUMBER 3/BRK/NOV/01 AND 102

**STANDARD MAINTENANCE REGIME (12 MONTHS).**

**PLANTING.**

1. SUPPLY AND LAY FOREST GRADE BIO MULCH BARK TO ALL PLANTING AREAS TO AN APPROXIMATE DEPTH OF 50MM
2. MAKE GOOD MULCH AREAS AT 12 MONTH INTERVALS OR UNTILL CLOSURE OF CANOPY IS EFFECTIVE

**WEEDING.**

3. SPOT TREAT WITH HERBICIDE OR HAND WEED AS APPROPRIATE. ALLOW 10NO VISITS

**WATERING.**

4. WATER ALL PLANTING—SHRUBS, WHIPS. 50 LITRES.— TREES 100 LITRES ALLOW 30NO VISITS

**SLOW RELEASE FERTILISER.**

5. APPLY AT 50GMS/ SQ METRE PER WHIP AND SHRUB 100GMS PER TREE ALLOW 1NO VISIT

**OTHER OPERATIONS.**

6. ALLOW 5NO VISIT TO ADJUST STAKES AND TIES. REFIRM PLANTS. PRUNE PLANTING TO PROMOTE GROWTH OR REMOVE DEAD WOOD.

NORTH


**Andrew Hastings. Landscape Consultants.**
The Fairways, Fairfield Close, Great Bromley, Essex. CO7 7UF.
**Tel:** 01206 255233.
**Fax:** 01206 251798.
**E Mail:** ahlandcons@ukonline.co.uk


DRAWING STATUS
**FOR APPROVAL.**

CLIENT
**ORANGE PCS (GVA GRIMLEY)**

PROJECT
**HARP FARM, BILL HILL FARM,WOKINGHAM.**

DRAWING TITLE
**Soft Landscape Proposals.**

| SCALE | DATE | DRAWN | CHECKED | DRAWING NUMBER |
|---|---|---|---|---|
| 1:200. | Aug 01. | AH. | AH. | 01.222/01. |

No dimensions are to be scaled from this drawing. All written dimensions to be checked by the contractor discrepancies notified immediately to this consultant. REV