


USER GUIDE FOR OPERATING NET PITCH DIVIDER SYTEM.

The procedure for positioning the pitch divider is as follows:

Pull out the top suspension wire from the winch post and securely attach it to the anchor post top eyelet.
(Top cable can be left in place if the nets are used frequently)

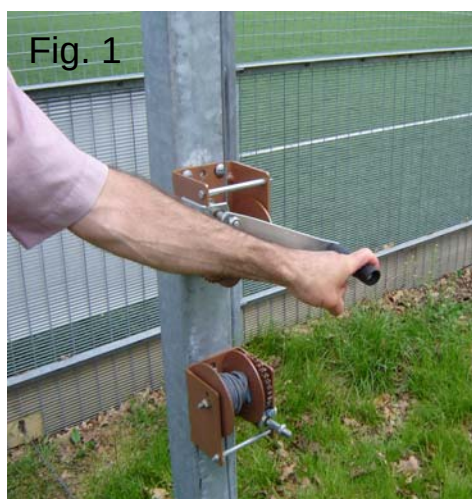

Take up the slack of the suspension wire using the brake winch and torque wrench provided until the wire is properly tensioned , to the setting on the torque wrench of* (Fig 1)

DO NOT ALTER THE SETTING ON THE TORQUE WRENCH AS OVER TENSIONING OF THE WIRE AS THIS MAY RESULT IN DAMAGE TO THE WIRE/WINCH/POSTS.



Gradually pull the net out evenly, working in stages from the winch post end to the anchor post end. The bottom cable remains in situ within the bottom of the netting at all times and the cable will obtain its own correct position once the net is fully pulled across the width of the pitch.

DO NOT ATTEMPT TO PULL THE NET FULLY ACROSS THE PITCH IN ONE GO, AS THIS MAY RESULT IN DAMAGE.



Once the net is fully extended, attach the lower guide cable to the bottom eyelet on the anchor post.
.Cable is to be tensioned with use of torque wrench to setting

With the net securely attached to the anchor post, move the intermediate support posts into position at roughly 1/3rd spacing and attach to the suspension wire. NOTE : The free standing support posts MUST be used at all times when the net is in use.



The procedure for dismantling the divider net is roughly the reverse of the above:

Remove the intermediate support posts and place well away from the divider net.
Disconnect the lower guide cable from the anchor post .
Gradually draw the net back towards the winch post working in stages (NB The bottom cable remains within the net at all times , there is no need to remove the cable from the bottom of the netting).
DO NOT ATTEMPT TO PULL THE NET FULLY ACROSS THE PITCH IN ONE GO, AS THIS MAY RESULT IN DAMAGE.
Securely tie the net to the winch post or fence.
With the net properly secured, slacken the tension on the suspension cable by reversing the brake winch/ torque wrench.
Disconnect the suspension cable from the anchor post and collect cable leaving with the net (or leave top cable in place if used regularly).

Both of the procedures above must be carried out by a designated 'responsible person'.