



Sign Projection Overview

GELATOO/SULTAN

11/06/24

The content of this document is confidential and intended for the recipient specified in message only. It is strictly forbidden to share any part of this message with any third party, without a written consent of the sender. If you received this document by mistake, please reply to this message and follow with its deletion, so that we can ensure such a mistake does not occur in the future.

Thankyou, UR Print

Sign Specs

Specs for both signs, Aluminium Flat Panel, 3MM Thickness, With Standoff Letters 3MM Thickness, With LED Behind Letters Facing Sign, HALO Background

The Letters Including the spacer 40mm spacers ,The 3mm Letter plus a 7mm Tolerance for Halo light behind letter, In total will be protruding outwards of 50mm.



Colour Pantone - ANODISED GOLD

Signage Overview

Max Letter Height
193mm x 208mm



GELATOO
IRRESISTIBLE DESSERTS

↕ 315mm

↔ 2300mm

Max Letter Height
193mm x 208mm




SULTAN
BLISSFULLY INDIAN

↕ 315mm

↔ 2300mm

Size

Signage Overview

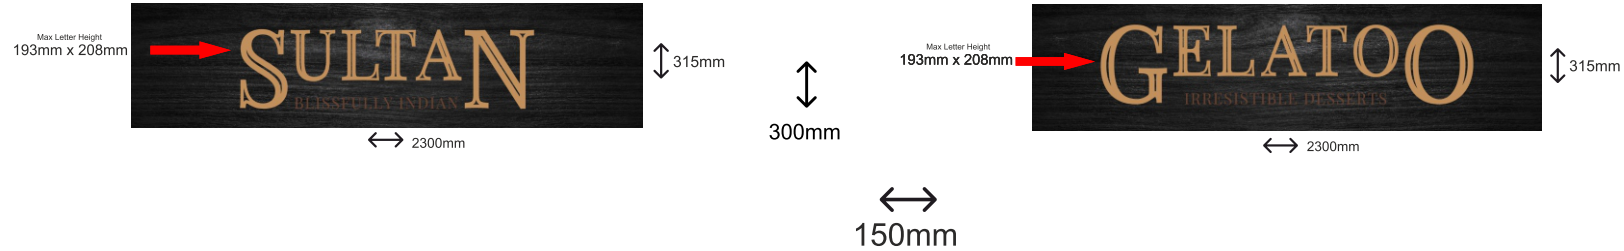

Lucoled Premium Value PV20 and PV24 modules offer a high quality and efficient Backlit solution for lightboxes and channel letters.

Using the latest high efficient LED technology and high quality optics Lucoled Premium Value series offers industry leading efficacy and coverage. This not only reduces the amount of modules needed for an application, but also the overall power consumption, reducing the total cost of ownership of a project.

Lucoled Premium Value series offers a 2 years extended warranty, making it the optimum choice for your high valued projects and critical installations. Your warranty exposure is reduced to a minimum.




- 5 years warranty
- First 2 years extended warranty
- Highest efficacy
- Constant Current Technology
- Narrow white binning

Lighting

Signage Overview


DIMENSIONS

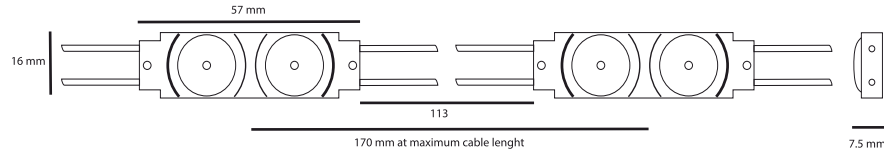

SPECIFICATIONS

- Dimensions 57x16x7.5mm
- Warranty 5 years (first 2 years extended)
- Beam angle: 170°
- Can be cut between every unit
- EL, CE and RoHS compliant
- Narrow white binning
- Constant Current Technology
- Operating temperature -25~+60°C

LUMINOUS INTENSITY DISTRIBUTION




Item no	LED colour	CT (K)	CRI	Power (W/mod)	Flux (lm/mod)	Efficacy (lm/W)	Voltage (DC)	Modules per chain	Modules per carton
PV20-W30	white	3000	>75	0.71	99	139	12	40	1200



Light box depth (mm)	Space between modules (mm)	Installing density (pcs/m ²)	Surface luminance range (cd/m ²)
dz=120	dx=170, dy=170	25	880-990

Results may vary depending on face material properties. The data above was obtained using 3mm thick opaque acrylic with a 54% light transmittance. Lucolco advises to paint the inside of the box/ letters in a matt white colour for achieving an optimal result. Always test before production.

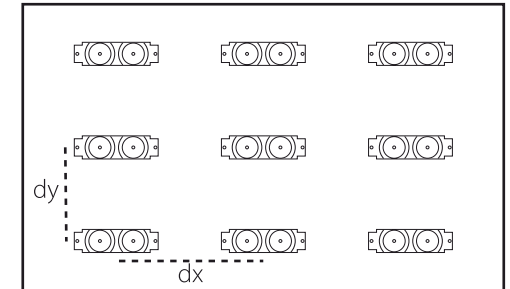

POWER SUPPLY CAPACITY 12V SERIES

Item	PP1230	PP1260	PP12100	PP12150	PP12200
Power Output	30W	60W	100W	150W	200W
PV20 modules / power supply	38	75	125	188	250
Maximum 40 modules per chain					

POWER SUPPLY CAPACITY 24V SERIES

Item	PP2430	PP2460	PP24100	PP24150	PP24200
Power Output	30W	60W	100W	150W	200W
PV24 modules / power supply	38	75	125	188	250
Maximum 80 modules per chain					

PACKAGING

Item	Qty (pcs/bag)	Qty (bag / carton)	Total Qty (pcs / carton)	Total weight (kg)	Carton size (LxWxH) in mm
PV20/PV24	40	30	1200	15.2	528 x 376 x 272