

PRODUCT DATA SHEET | ROSA 93102



IP66 IK06 CRI >80

	A	B	Power
93102.01	300	150	10 W
93102.02	500	150	10 W
93102.03	750	150	15 W
93102.04	1000	150	15 W
93102.05	1500	150	20 W
93102.06	2000	150	20 W

DESCRIPTION



Extruded aluminum body
Tempered glass
Steel flange with galvanized
Chromate conversion
Electrostatic powder coating
Stainless steel screws (grade 304)
Mechanical impact resistance IK06
Protection Grade IP66
Electrical installation Class I

COLOR OPTIONS

RAL 7016 Anthracite Grey
 RAL 9005 Black
 RAL 9006 White Aluminium

RAL 7022 Umbra Grey
 RAL 9016 White
 RAL xxxx Optional

Dimensions

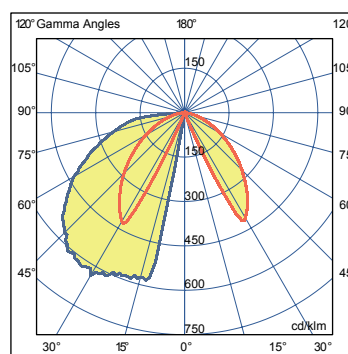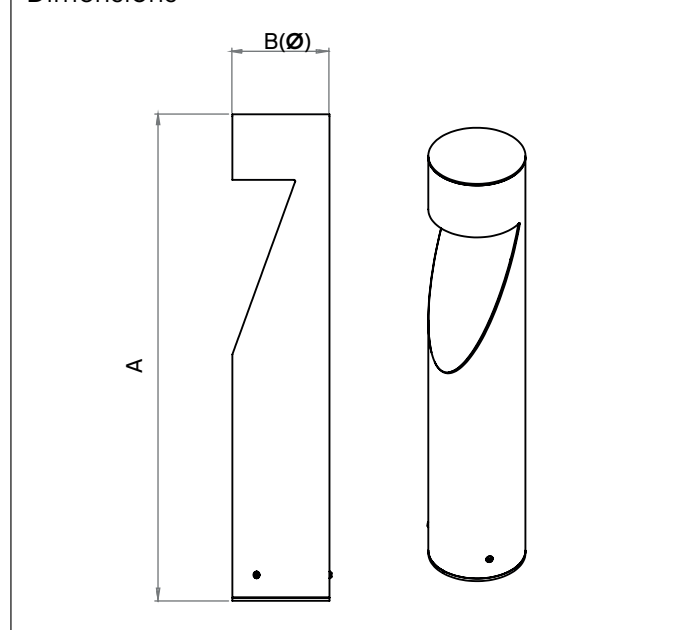

TECHNICAL DETAILS (FELIX MODULE)

Module luminous efficiency : 121 lm/W
 Luminaire luminous efficiency : 76,73 lm/W (4000k)
 Cct : 2700K - 3000K - 4000K - 6500K
 Color Rendering Index : >80
 Power Factor : Cos Ø > 0,9
 Led Life Time - L70 : > 72.000 hours @Ta= 45 °C
 Operating Temperature Range : -20 °C / +45 °C
 Input Voltage : 220-240(V) 50-60(Hz)
 Driver : On/Off

OPTIONS

DALI controllable
 Double powder coating

PRODUCT DATA SHEET | ROSA 93102

