



Wavin Stormwater Management



CONNECT TO BETTER

Wavin Stormwater Management

Project Details			
Project Name	Heathlands	Produced By	Paul Nicholson
Client Name	ET Planning		
Site Address	Heathlands Riding Centre Hatch Ride Wokingham , RG40 3AS	Date	30/04/2025

Modular Units and Tank Details - Heathlands 2024


Unit configuration

The following information provides an approximate calculation and some assumptions. If more accurate information is required, please contact our technical team.

Length	10m	10 units
Width	6m	12 units
Depth	1.2m	3 units
Total Number of Units		360 units

Recommended Unit

Wavin recommend using the following unit for your installation.

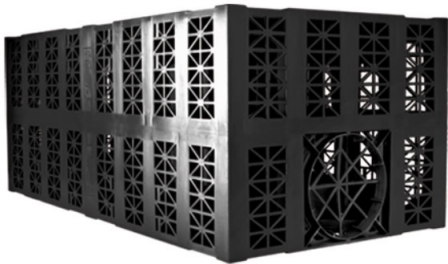

AquaCell Core R

Product Number: 6LB150

AquaCell Core R has been designed for use in deep applications, subject to both regular and heavy traffic loadings, such as cars and HGV's (for vehicles up to 44 tonnes).

Other Unit(s)

The following unit(s) can also be used with, or in place of the recommended unit.

Calculations

Site Details

Area	1972m ²
Soil Type	Loose Sand and Gravel
Groundwater Present	No

Traffic Loading (Soakaway size based on 1:30 year Storm)	Trafficked low speed road
--	---------------------------

If you would like to find out how to purchase, please contact your Area Sales Manager

Local Sales Manager

Name	John Nichols
Phone Number	07966 333689

Site Sales Manager

Name	Nick Stack
Phone Number	07880 147978

Aquacell Disclaimer

- All information generated by this tool is supplied in good faith and without charge to enable reasonable assessment of the practical performance of Wavin products.
- Wavin offers a program of continuous improvement and reserves the right to modify the specification of products without notice.
- All information in this publication is believed to be correct at time of preparation. However, no responsibility can be accepted for any errors or omissions. Final determination of the suitability of information or material for the use contemplated and the manner of the use is the sole responsibility of the user
- Calculations are based upon relevant industry standards in accordance with the Wallingford Procedure, and should be verified by a qualified engineer.