

OVERLORD MODULAR APEX SHED IN TONGUE AND GROOVE

Approx. W6' x D8' / W1.8m x D2.4m
Wall Thickness: 15mm Tongue & Groove.



SPECIFICATION:
EXTERNAL WIDTH = 1.850m
EXTERNAL DEPTH = 2.460m



INTERNAL WIDTH = 1.740m
INTERNAL DEPTH = 2.272m

EXTERNAL ROOF HEIGHT = 2.465m
INTERNAL EAVES HEIGHT = 2.355m

OVERALL WALL THICKNESS = 15mm TONGUE & GROOVE
OVERALL ROOF THICKNESS = 15mm TONGUE & GROOVE
OVERALL FLOOR THICKNESS = 15mm TONGUE & GROOVE

SECURE LOCKING SYSTEM

With a lock and key supplied as standard, you can securely lock away your garden tools and equipment. For additional security we also supply shoot bolts, making it more difficult for someone to force the door open. Adding to the overall stability of the door, the shoot bolts reduce the likelihood of it being kicked in or pried open.

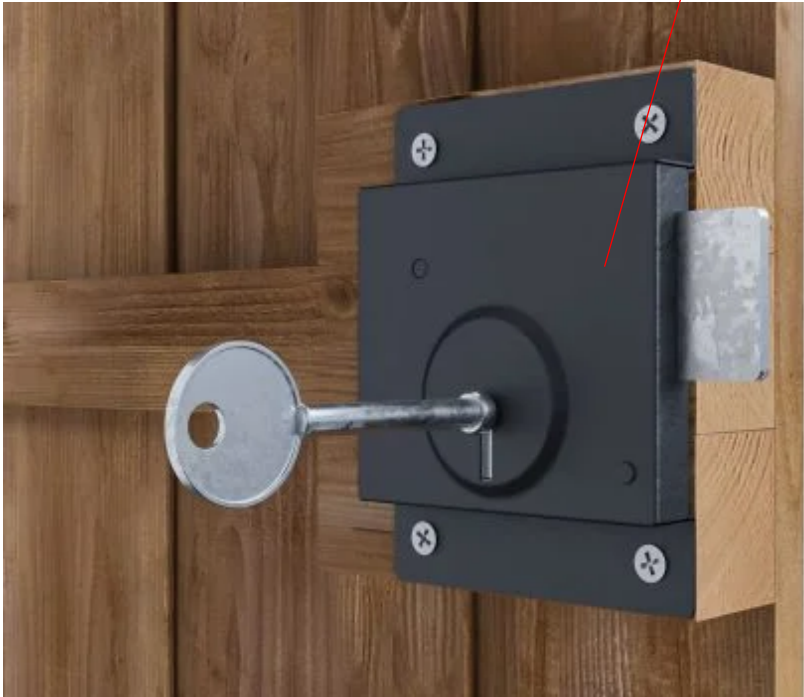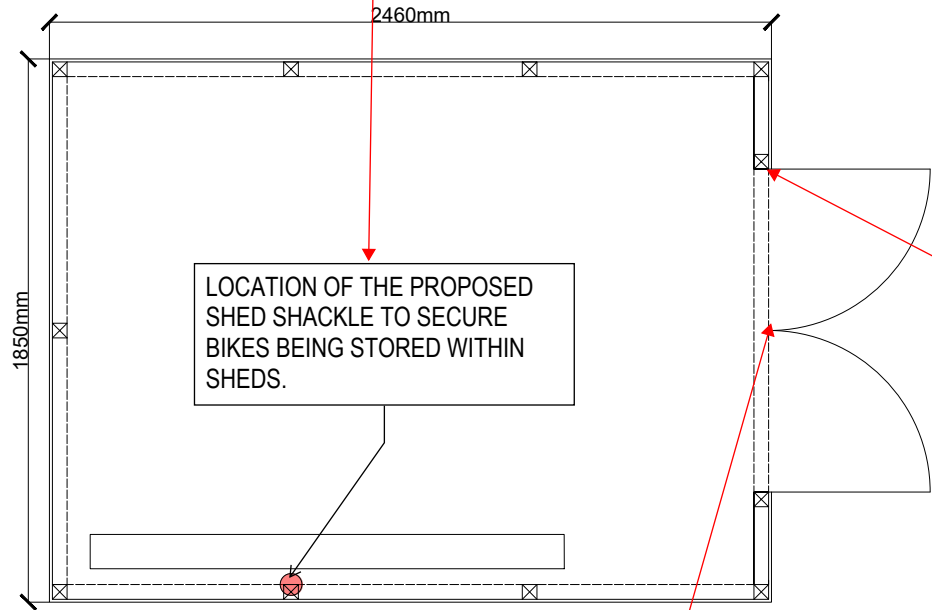

GROUND AND WALL ANCHOR FOR BIKE STORAGE

For additional safety measures each shed will have installed a:
Burg-Wachter Ground & Wall Anchor (or similar approved)
Product Code: SA 1280 SB

This product, coupled with the secure locking system delivered as part of the shed ancillaries, ensures the maximum safety and security of the contents of the shed, inclusive of cycle storage.

Secure Hinges

The modular shed feature zinc-plated high-security hinges. Why is this important? Quite simply the zinc plating prolongs the lifetime of the hinges by protecting the metal underneath from rain which causes rust.

What makes the hinges secure? Well, not only do the hinges have to be screwed on but also bolted into the thick timbers which make up the door frame and door. Bolting the hinges into the framework makes it harder for intruders to unscrew the doors and steal your belongings.



ADDRESS:
FARADAY BUSINESS PARK,
RANKINE ROAD,
BASINGSTOKE,
RG24 8QB

TELEPHONE
0333 122 3737

millershomes

DRAWING TITLE
SECURE CYCLE STORAGE

DRAWING NUMBER
817121_MHS_CYC_0001

REVISION
-