



School House,

Norton Road, Reading, RG7

Internal Daylight Assessment

Job No: 6058

Issued: December, 2024

Issue No: 1



Contents

1.0 Introduction.....3

2.0 Project Summary.....4

3.0 Methodology.....5

4.0 Room Schedules.....6

5.0 Daylight Results.....7

6.0 Conclusions.....8

Document Prepared By:

Document Authorised By:

Samuel Westover

Bernice Waterman

Dated:

Dated:

11.12.24

11.12.24

Signed:

Signed:

This report has been prepared for the exclusive use of the commissioning party and may not be reproduced without prior written permission from T16 Design.

All work has been carried out within the terms of the brief using all reasonable skill, care, and diligence. No liability is accepted by T16 Design for the accuracy of data or opinions provided by others in the preparation of this report, or for any use of this report other than for the purpose for which it was produced.

1.0 Introduction

- 1.1 This internal daylight assessment has been prepared to support an application for the proposed development of the site known as School House, Norton Road, Reading, RG7.
- 1.2 The report assesses the proposals in respect of daylight matters within habitable rooms in the proposed scheme, having regard to industry standard guidance.
- 1.3 The report concludes that the proposal is acceptable and in accordance with planning policy requirements in relation to daylight for those rooms assessed.
- 1.4 There is no existing specific National Planning Policy relating to the prospective impacts of developments on daylight and sunlight on their surrounding environment.
- 1.5 However, the BRE Report 'Site Layout Planning for Daylight and Sunlight: A Guide to Good Practice' (3rd edition, 2022) is the established National guidance to aid the developer to prevent and/or minimise the impact of a new development on the availability of daylight within new proposals.
- 1.6 It has been developed in conjunction with daylight and sunlight recommendations in BS EN 17037: 2018+A1:2021 (with UK Annex): 'Daylight in Buildings'
- 1.7 This reference document is accepted as the authoritative work in the field on daylight, sunlight and overshadowing and is specifically referred to in many Local Authorities' planning policy guidance for daylighting. The methodology therein has been used in numerous lighting analyses and the standards of permissible reduction in light are accepted as the industry standards.

2.0 Project Summary

- 2.1 The site is located on Norton Road, Riseley and it is currently unoccupied.
- 2.2 The proposal involves the construction of a two storey three bedroom detached house.
- 2.3 The developer wishes to ensure that the new dwelling will receive sufficient daylight for their intended use, in excess of the minimum values prescribed by BS EN 17037: 2018+A1:2021
- 2.4 2D CAD drawings have been provided to us by the design team. These have been used to construct a 3D analysis model in order to assess the internal daylight levels within each room.
- 2.5 Computer simulation modelling has been used to produce the results, presented below.

2.6



Site Location

3.0 Methodology


- 3.1 This BRE and BS EN 17037 guidance allows for two alternative methods to assess daylight within new dwellings. This report uses the following method:
- Target Daylight Factor (DF_T)
- 3.2 The DF_T method is a complex and representative calculation to determine natural internal luminance.
- 3.3 It takes into account such factors as window size, number of windows available to the room, room size and layout, room surface reflectance, and the angle of visible sky reaching the window.
- 3.4 The calculations have assumed a white ceiling, cream walls and mid-grey carpet or wooden floor using reflectance values taken from the BS EN 170437 Guidance.
- 3.5 The benchmark values for all habitable rooms which are recommended by the BRE guidance and BS:EN 17037:2018 are:

Table C2 – Target daylight factors (D) for London


Level of recommendation	Target daylight factor D for half of assessment grid	Target daylight factor D for 95% of assessment grid
Minimum	2.1%	0.7%
Medium	3.5%	2.1%
High	5.3%	3.5%

- 3.6 It is deemed by the guidance that if the minimum DF criteria are met, then the occupiers of the dwelling will have sufficient daylight. As can be seen from the results below that all assessed habitable rooms meet and exceed the minimum levels of internal daylight.

4.0 Room Schedules

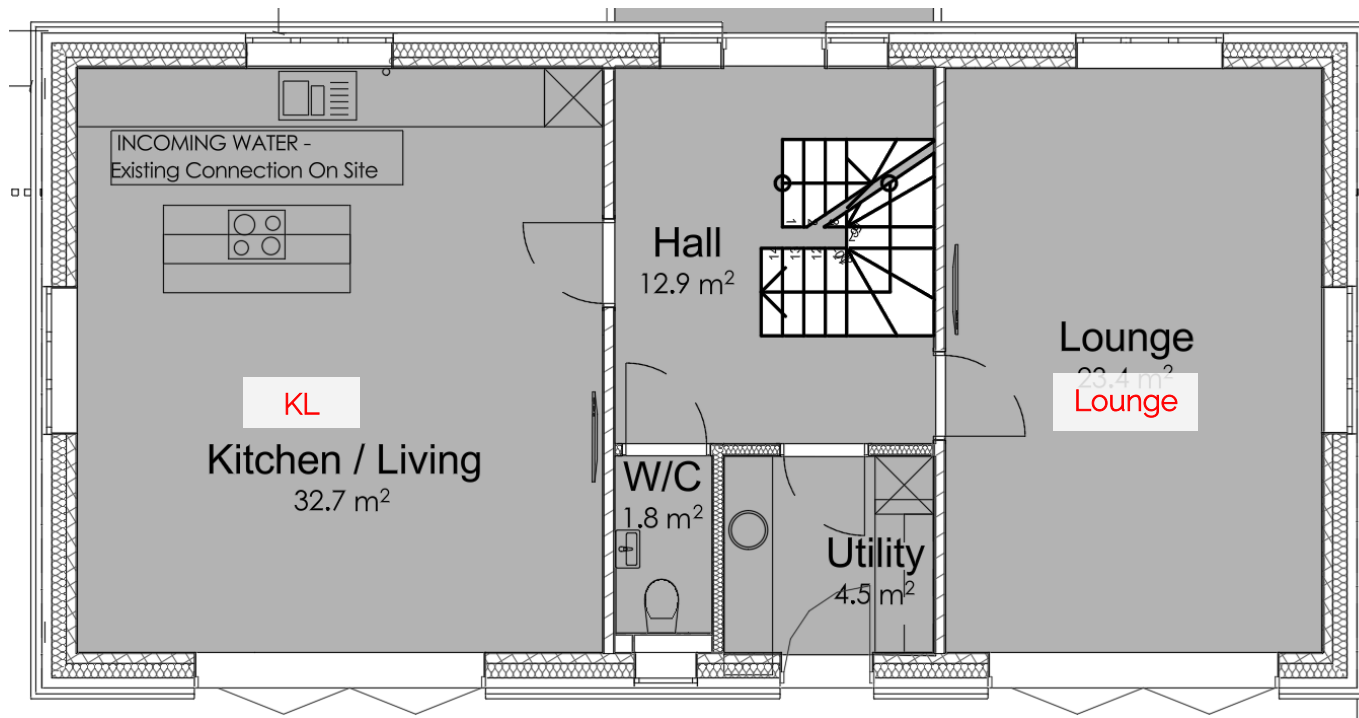

Ground Floor as Proposed

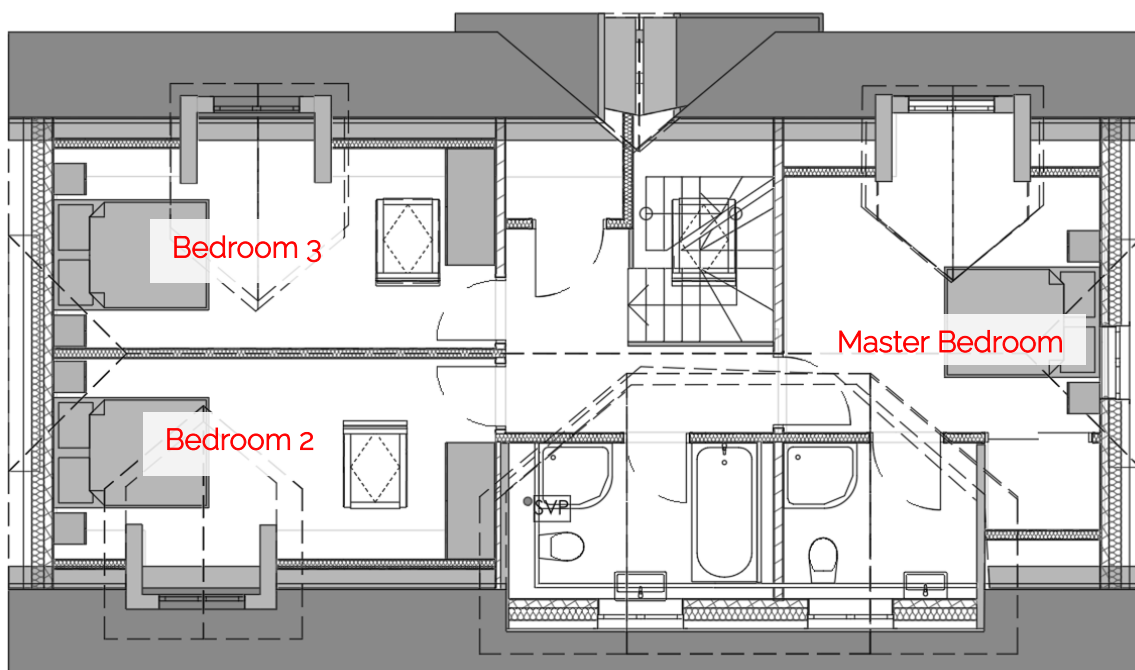

First Floor as Proposed

5.0 Daylight Results

Minimum Target Daylight Factor						
Unit	Room	0.7% DF Target Area	Area Receiving 0.7% DF	2.1% DF Target Area	Area Receiving 2.1% DF	Meets Standards?
1	KL	95%	98.8%	50%	83.5%	Yes
1	Lounge	95%	99.4%	50%	86.9%	Yes
1	Master Bedroom	95%	98.2%	50%	81.7%	Yes
1	Bedroom 2	95%	99.8%	50%	93.4%	Yes
1	Bedroom 3	95%	99.7%	50%	92.0%	Yes

6.0 Conclusions

- 6.1 The proposed construction of the School House, Norton Road, Reading , RG7 has been assessed for internal daylight levels using the Target Daylight Factor (DF_T) test as prescribed by the BRE guidance and BS EN 17037:2018.
- 6.2 The design team has endeavoured to ensure that the proposed habitable rooms have levels of natural light in excess of the minimum standards prescribed by the standards.
- 6.3 This has been successfully achieved, as demonstrated by the positive results presented within this report.
- 6.4 The assessed rooms meet the recommendations using the DF_T test.
- 6.5 This means the future occupants will enjoy a well-lit environment, with reduced reliance on artificial lighting.
- 6.6 It is therefore the conclusion of this report that the proposals meet the guidance levels for daylight and are therefore acceptable in planning terms.



T16 Design Ltd.

T: 01206 572452

E: info@t16design.com

W: www.t16design.com

© 2024