


Facing Brick – Ibstock Dorking Red

Dorking Red



Ibstock
At the heart of building

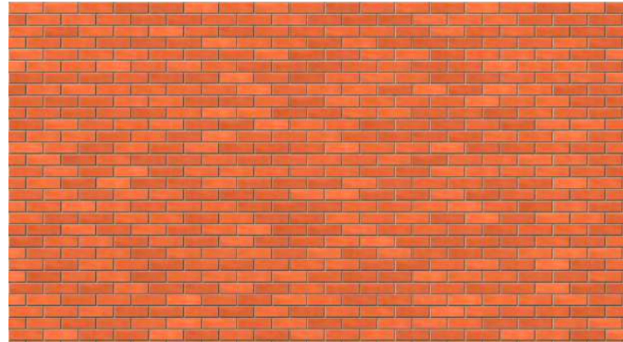


Product Information

Ibstock Code:	A4125A
Type:	Wirecut Extruded
Facing Description:	Sandfaced
Dry Brick Weight (kg):	2.1kg
Pack Quantity:	500
Packaging (standard):	Banded (Plastic)
Factory:	South Holmwood

Technical Specification (to BS EN 771-1)

Brick Dimensions (L x W x H mm):	215x102x65
Size Tolerances Mean & Range:	T2 R1
Configuration:	Vertically Perforated
Voids (%):	30-34
Compressive Strength (N/mm ²):	40
Active Soluble Salts:	S2
Water Absorption (% weight):	12
Durability:	F2
Gross Dry Density (Sound Insulation) (Kg/m ³):	1450
Equivalent Thermal Conductivity "K" value 5% Exposed:	1.15
Initial Rate of Absorption (Suction Rate) (Kg/m ² /min):	0.6
EAN:	5036335025819

Feature Brick – Wienerberger New Red Multi Gilt Stock

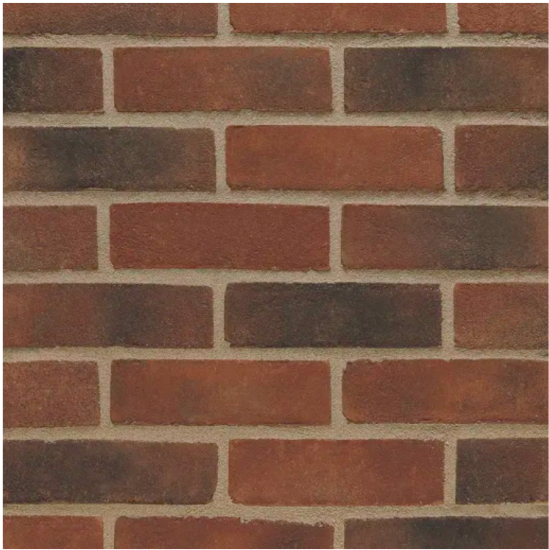

Click image to zoom in



Wienerberger New Red Multi Gilt Stock Brick 65mm

SKU: BCN51497

This product is made with naturally occurring materials - colour and texture will differ due to the various locations it is sourced from. This should be considered if using this product for decorative purposes.

Features & benefits

- Made with naturally occurring materials.
- Colour and texture will differ due to the various locations it is sourced from.


Specifications

Product Name	Wienerberger New Red Multi Gilt Stock Brick 65mm
Brand	Terca
Manufacturer Name	Wienerberger
Manufacturer Part Number	24320230
Materials	Clay
Commercial Or Domestic Use	Both
Colour	New Red Multi
Application	External
Pack Quantity	500
Country Of Origin	United Kingdom
Product Width	102.5 mm
Product Weight	3.01 kg
Product Height	65 mm
Product Length	215 mm
Durability Rating	F2

Render – Monocouche Chalk White



Roof Tiles – Marley Modern Interlocking Tiles – Grey

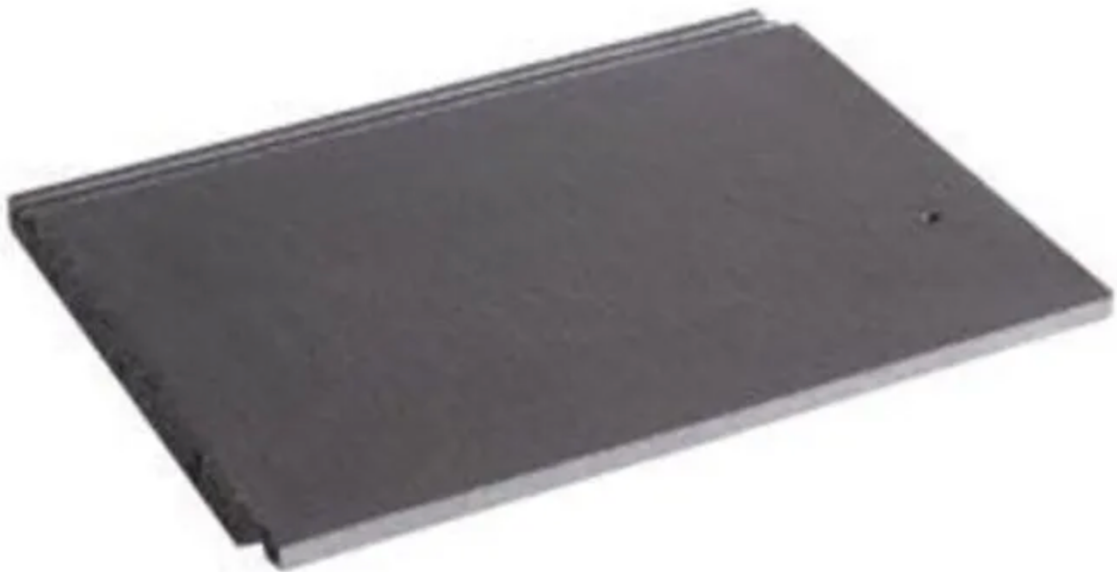

Tile Design	Modern Concrete Interlocking Tile
Minimum Pitch	17.5° Headlap (100mm) Smooth 22.5° Headlap (75mm) 25° Headlap (100mm) Granular 30° Headlap (75mm)
Maximum Pitch	90°
Size of Tile	420mm x 330mm
Minimum Headlap (Max Gauge)	75mm (345mm) 100mm (320mm)
Tile Thickness	30mm (nominal)
Cover width	292mm (nominal)
Covering Capacity (net)	75mm Headlap – 9.9 tiles/m ² 100mm Headlap – 10.7 tiles/m ²
Weight of Tiling	75mm Gauge – 50kg/m ² (0.49 kN/m ²) 100mm gauge – 54kg/m ² (0.53 kN/m ²)
Quantity Per Pallet	Modern Tiles – 192
Battens Required	75mm gauge – 2.9 lin.m/m ² 100mm gauge – 3.1 lin.m/m ²
Recommended Batten Size	38mm x 25mm for rafters not exceeding 450mm centres 50mm x 25mm for rafters not exceeding 600mm centres
Underlay	Vapour Permeable (MA33150) Non Vapour Permeable (MA33145)
Tile Colours Available	Smooth Brown (S) (MA10452) Anthracite (S) (MA10438) Smooth Grey (S) (MA10428) Antique Brown (S) (MA10420) Old English Dark Red (S) (MA10480) Mosborough Red (S) (MA10439) S – Smooth Finish G - Granular