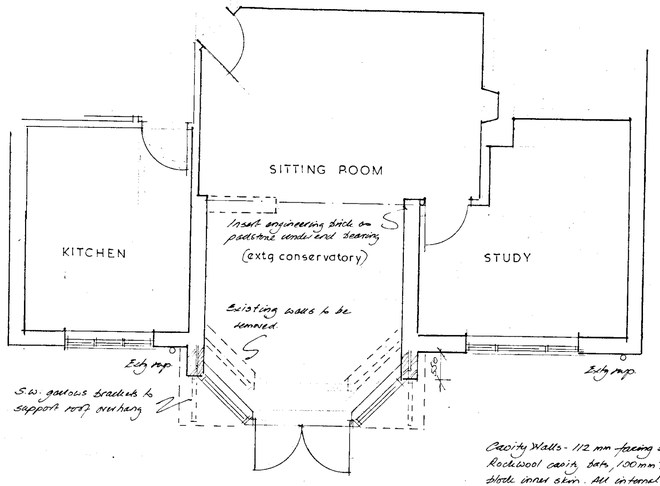

PROPOSED FLOOR PLAN



SOUTH

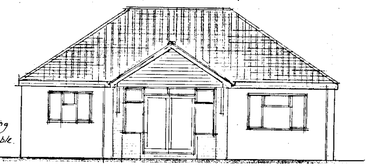

EAST



NORTH

Glazing to doors and sidelights all in toughened safety glass to BS 6206.

Double glazed upvc. door & windows units fitted with draught seals & trickle ventilation of min 8000 mm² total.

Cavity Walls - 112 mm facing bwk, 50 mm Rockwool cavity bats, 100 mm Thermolik Shield block inner skin. All internal walls plastered. S/S wall ties at 450 c/c vertically and 900 c/c horizontally and staggered. Close cavity around openings using proprietary thermal closer eg. Thermabate. Fully bond new walls to existing cutting through to form continuous cavity.

NOTE - ALL DIMENSIONS AND SETTING OUT TO BE CHECKED ON SITE PRIOR TO COMMENCEMENT PARTICULARLY WITH REGARDS CONFORMITY TO EXISTING STRUCTURE, ROOF PITCHES ETC.

ALL ELECTRICAL, HEATING AND GENERAL FINISHING REQUIREMENTS TO BE AGREED WITH CLIENT.

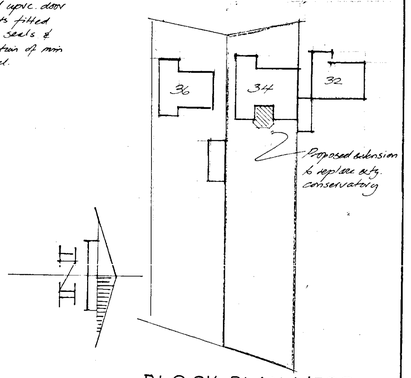

BLOCK PLAN 1/500

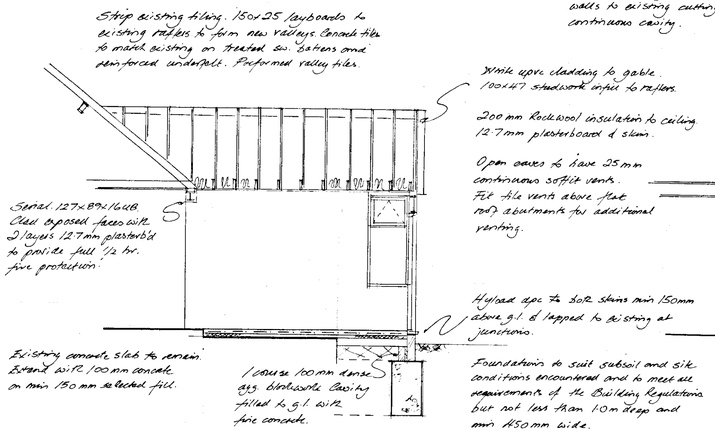

SECTION AT A

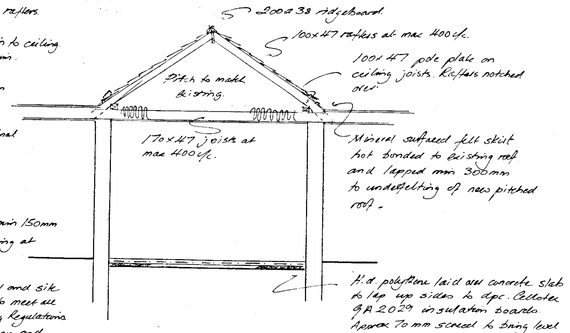

SECTION AT B



LOCATION 1/1250

D 22/5/01

34, NIGHTINGALE ROAD, WOODLEY, READING

PROPOSED SINGLE STOREY REAR EXTENSION

SCALES - 1/50 & 1/100

13 MAR 2001. 3557

JOHN R HALL
CHARTERED SURVEYOR
Tel. 0118 9882883

client Mr & Mrs M. Thomson

March 2001

PBC/1676A