


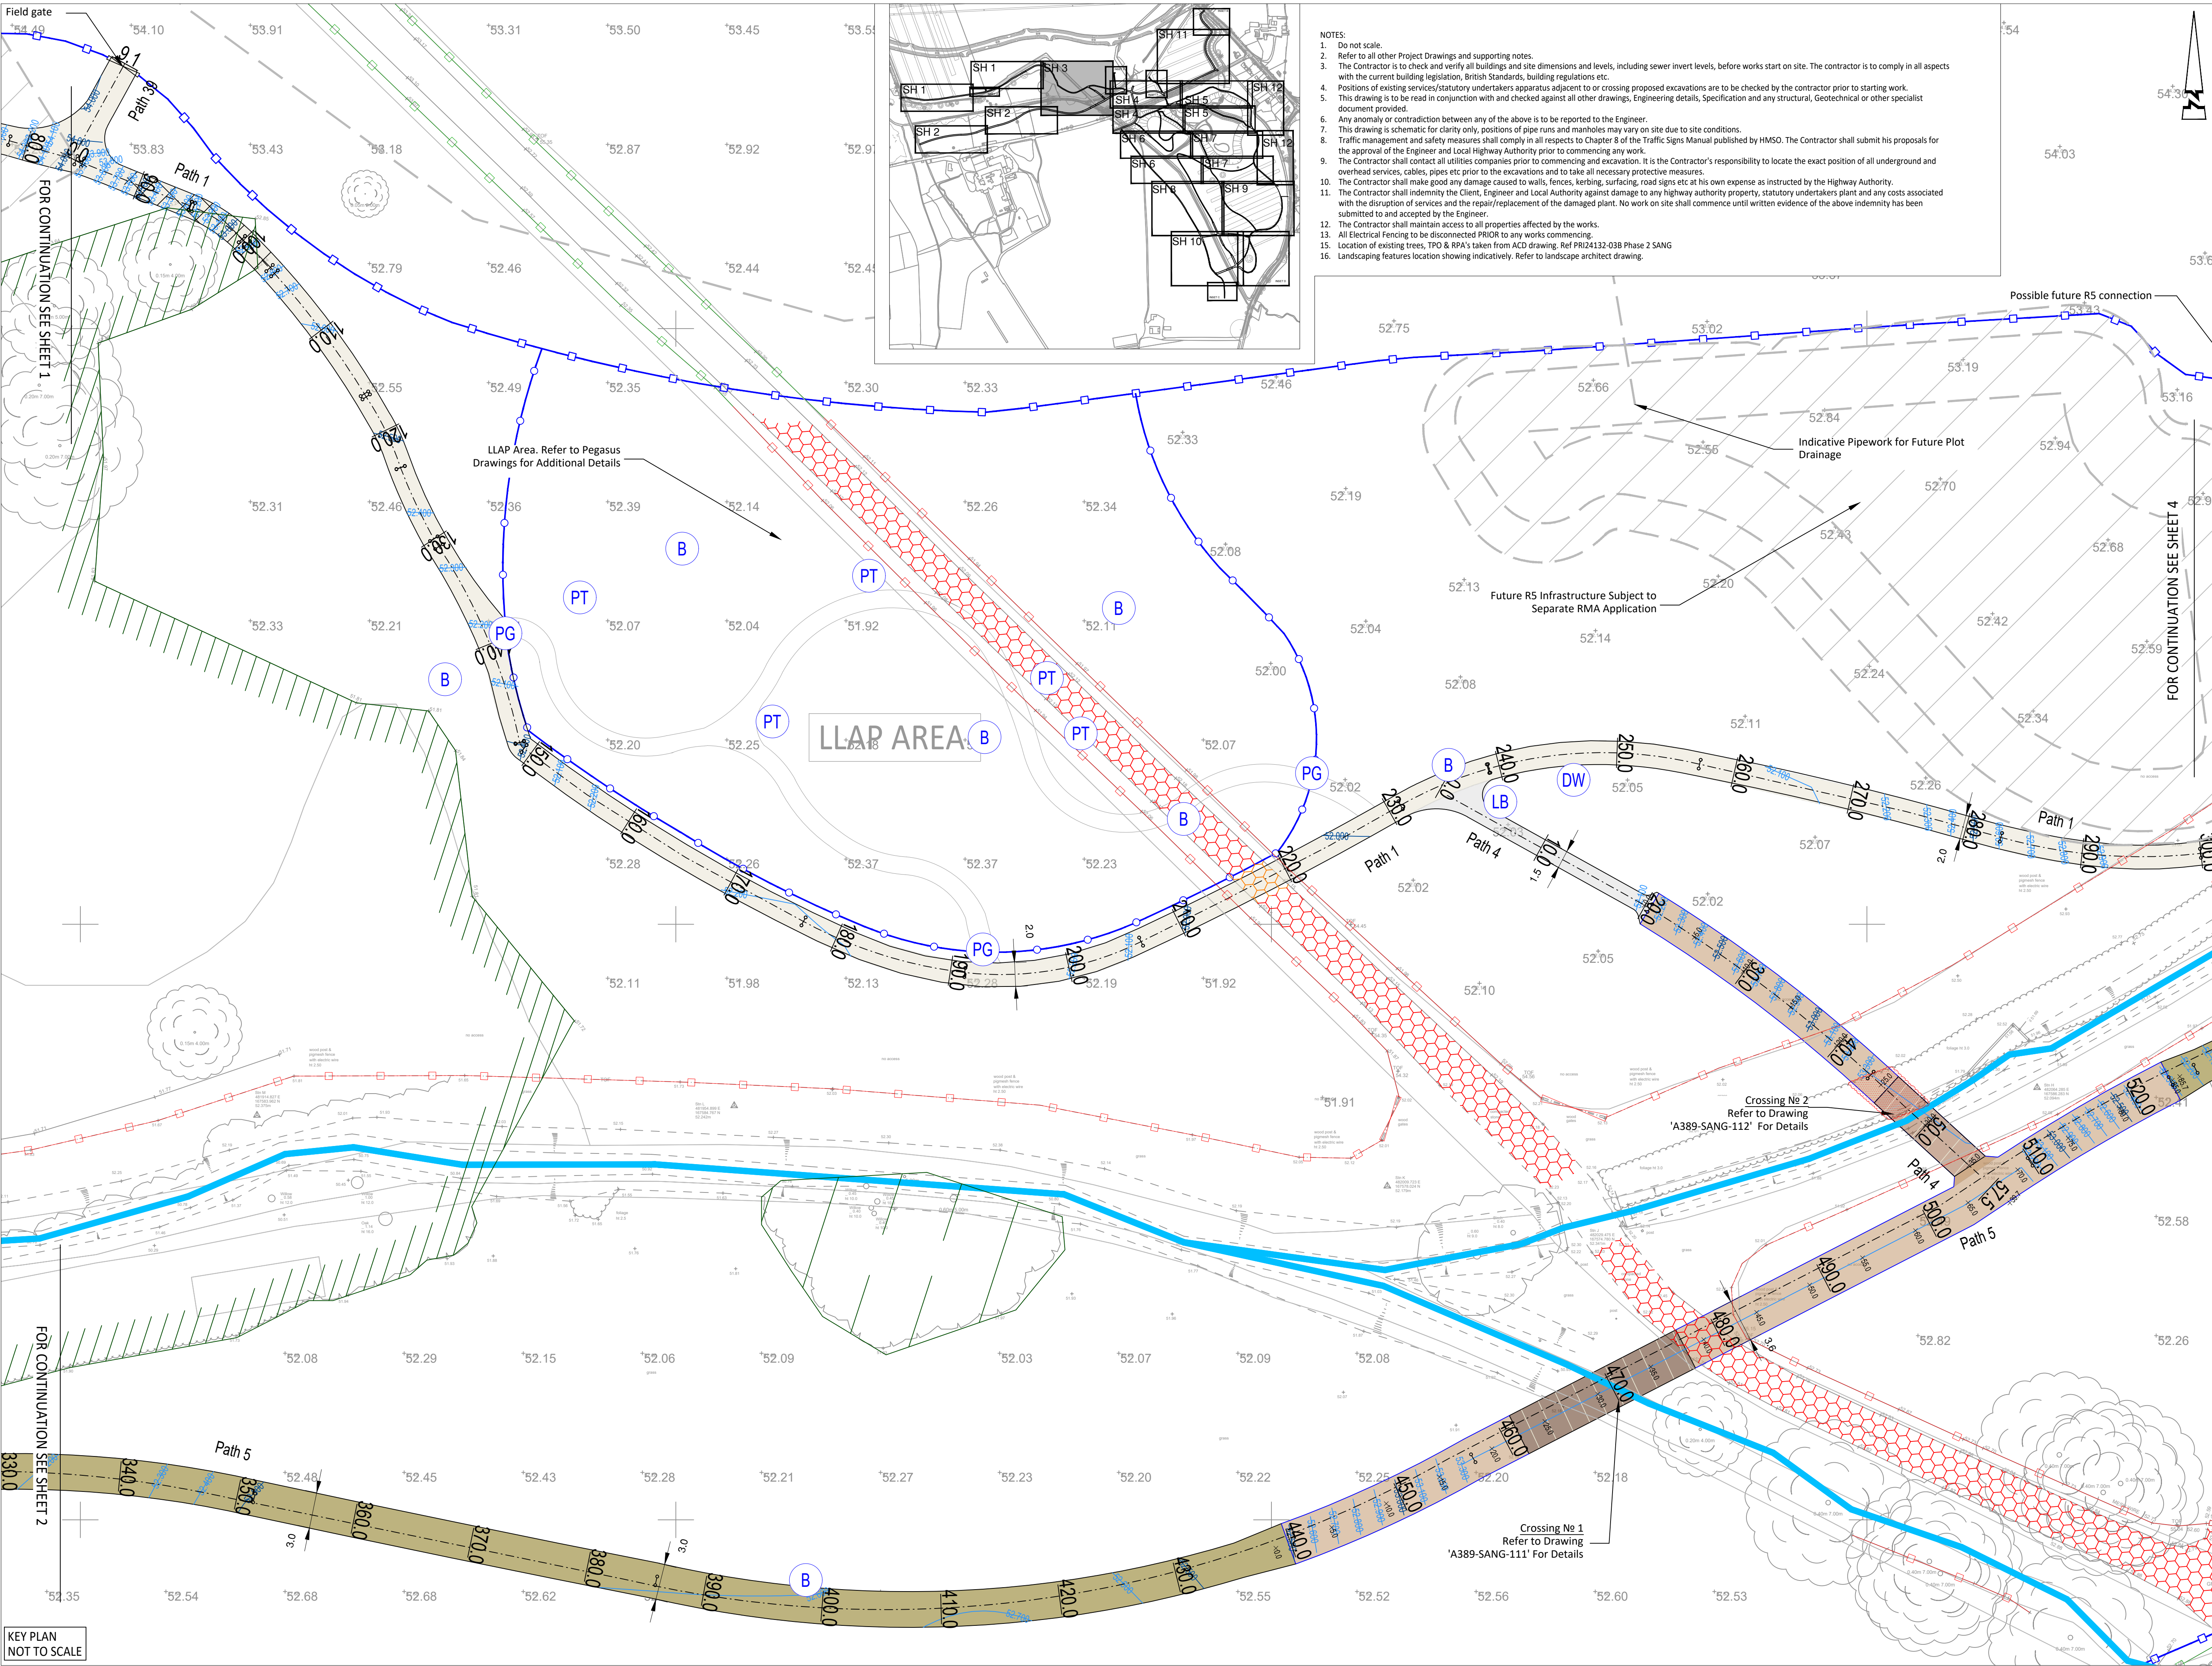

- NOTES:
1. Do not scale.
 2. Refer to all other Project Drawings and supporting notes.
 3. The Contractor is to check and verify all buildings and site dimensions and levels, including sewer invert levels, before works start on site. The contractor is to comply in all aspects with the current building legislation, British Standards, building regulations etc.
 4. Positions of existing services/statutory undertakers apparatus adjacent to or crossing proposed excavations are to be checked by the contractor prior to starting work.
 5. This drawing is to be read in conjunction with and checked against all other drawings, Engineering details, Specification and any structural, Geotechnical or other specialist document provided.
 6. Any anomaly or contradiction between any of the above is to be reported to the Engineer.
 7. This drawing is schematic for clarity only, positions of pipe runs and manholes may vary on site due to site conditions.
 8. Traffic management and safety measures shall comply in all respects to Chapter 8 of the Traffic Signs Manual published by HMSO. The Contractor shall submit his proposals for the approval of the Engineer and Local Highway Authority prior to commencing any work.
 9. The Contractor shall contact all utilities companies prior to commencing and excavation. It is the Contractor's responsibility to locate the exact position of all underground and overhead services, cables, pipes etc prior to the excavations and to take all necessary protective measures.
 10. The Contractor shall make good any damage caused to walls, fences, kerbing, surfacing, road signs etc at his own expense as instructed by the Highway Authority.
 11. The Contractor shall indemnify the Client, Engineer and Local Authority against damage to any highway authority property, statutory undertakers plant and any costs associated with the disruption of services and the repair/replacement of the damaged plant. No work on site shall commence until written evidence of the above indemnity has been submitted to and accepted by the Engineer.
 12. The Contractor shall maintain access to all properties affected by the works.
 13. All Electrical Fencing to be disconnected PRIOR to any works commencing.
 14. Location of existing trees, TPO & RPA's taken from ACD drawing. Ref PH24132-038 Phase 2 SANG
 15. Landscaping features location showing indicatively. Refer to landscape architect drawing.

© ABLEY LETCHFORD PARTNERSHIP LTD.
This drawing should not be reproduced without consent.

GENERAL:

- RPA Root Protection Area
- TPO Tree Preservation Order
- Existing levels from topographic survey
- Proposed Footpath Centreline and Marker
- Footpath contours (major at 500mm, minor at 100mm)
- Proposed mound level

EXISTING:

- Ancient Woodland Area
- Dense Foliage
- Existing Tree to be Removed
- Existing Vegetation (Hedgerow) to be Removed
- Existing Public Right of Way ref: 'WOKWIO'
- Existing Track to Remain
- Existing Track to be removed and reinstated as vegetation
- Existing Track to be broken down in preparation for Edged Gravel Path Construction
- Existing Watercourse/ Main River
- Existing Fence to Remain
- Existing Fence to be removed and disposed offsite
- Existing Gate to Remain
- Existing Gate to be Removed

PROPOSED (Refer to A389-SANG-711 for Construction Details and Pegasus Drawings):

- Proposed Mown Path
- Proposed Breedon Gravel Path (Edged). Existing field topsoil to be stripped to a maximum depth of 465mm
- Proposed KBI Flexistone Path
- Proposed No Dig 'Cellweb' Breedon Gravel Path Through Ancient Woodland
- Proposed Boardwalk Ramp
- Proposed Pedestrian Bridge
- Proposed Maintenance Bridge
- Proposed No Dig 'Cellweb' Construction
- Proposed Earthworks Mound (Up to 1m High with a Max 1 in 3 Slopes)
- Proposed Dog Beach refer to Landscape Package for Details
- Proposed Timber Playground Fencing. Refer to Landscape Package for Details
- Proposed SANG Dog Proof Boundary Fence
- Proposed 1.2m 2 Person Bench
- Proposed 1.8m 6 Person Picnic Table
- Proposed Bolt Down Fixed Litter Bin
- Proposed Post Mounted Dog Waste Bin
- Proposed Information Board
- Proposed Height Restrictor

SUBJECT TO
TECHNICAL APPROVAL

P4	07.26	UPDATED TO SUIT LATEST LAYOUT	CLL	RF
P3	06.26	UPDATED TO SUIT LATEST LAYOUT	CLL	RF
P2	10.25	UPDATED PATH ALIGNMENT	AS	RF
P1	09.24	FIRST ISSUE	AS	CS
Rev	Date	Description	Drawn	Checked



www.ableyletchford.co.uk

Client
**MILLER HOMES
KIER VENTURES**

Project
SOUTH WOKINGHAM SDL

Title
**HOLME PARK SANG
GENERAL ARRANGEMENT
SHEET 3**

Status

Scale	Date	Drawn	Checked
1:250 @ A1	SEPT 2024	AS	CS
Drawing No	Revision		
A389-SANG-103	P4		