
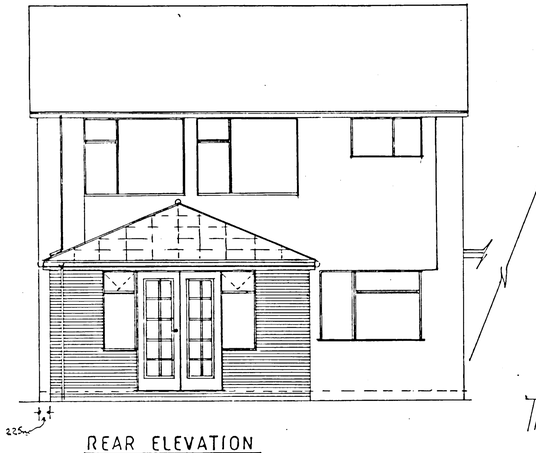



REAR ELEVATION

ROOF STRUCTURE 22½°
MATCHING CONCRETE INTERLOCKING TILES
UNDERDRAPE ROOFING FELT
BATTENS & C/JOISTS 50X125c/c MAX
PURLIN 50 X 200 SKIN OVER WALLS
CROSS VENTILATION LEFT 10m SCREENED GAP IN SOFFITS / 12.5m POLYSTYRENE BETWEEN JOISTS
12.5m FOIL BACKED CLADDING
USE OWNIC VENTILATORS AT EAVES
12.5m X 32m WIND BRACING RAKING FROM RIDGED TO PLATE TO UNDER OF RAFTERS

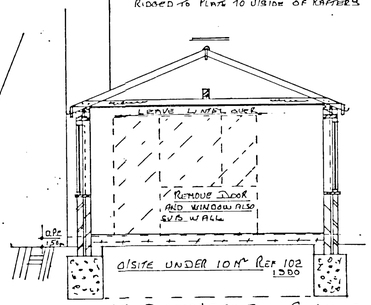


65m SCREED / D.P.M. 3 COATS SYLVAPRUFE
150m CONC / 150m HCORE (CONSOLIDATED)
INSERT D 182 MESH WITH MIN COVERAGE
50m 10/1" BOTTOM OF SLAB
N.B. INSERT CHICKEN WIRE IN O/SITE WITH MIN 300m LAPPING OLD & NEW FLOOR
TO ELIMINATE FLOOR LEVEL MOVEMENT

SECTION A-A

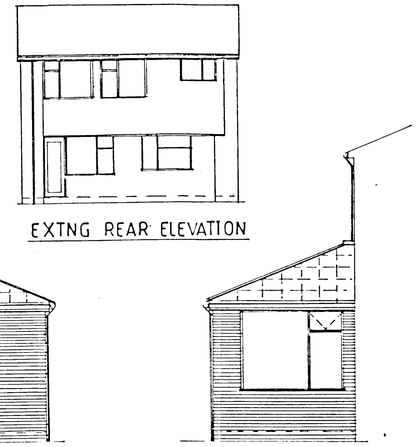

EXTNG REAR ELEVATION

N/EAST ← ELELEVATIONS → S/WEST

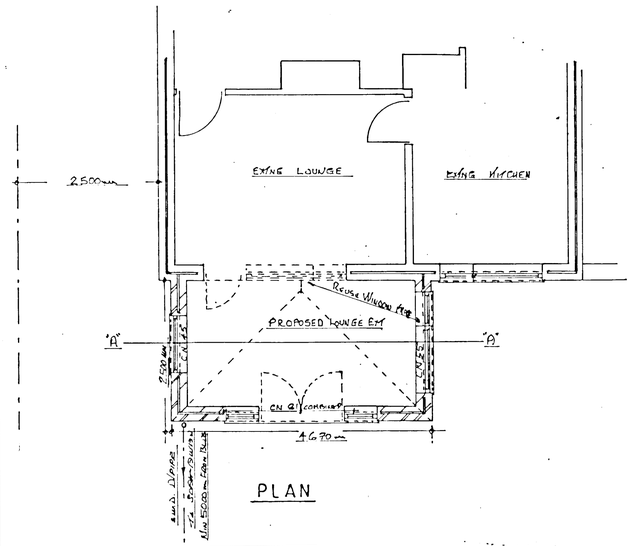
2500m
EXTNG LOUNGE
EXTNG KITCHEN
REMOVE WINDOW FRAME
PROPOSED LOUNGE EXT
"A"
"A"
2100m
CH
CH
CH