

REAR ELEVATION (EXISTING)



END ELEVATION (EXISTING)

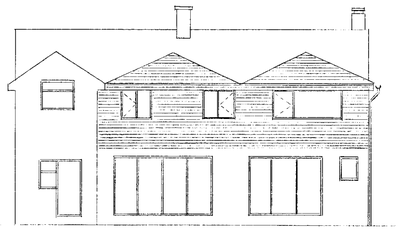

REAR ELEVATION (PROPOSED)



END ELEVATION (PROPOSED)

15 MAR 2001 357

15 MAR 2001 357

NOTES

CATNIC LINTELS TO ALL OPENINGS TYPE CN 4
LATERAL RESTRAINT AT 1ST FLOOR & EAVES LEVEL BY M.S. STRAPS AT 1800 CNTRS
S.W. DRAINAGE 100 H.R. GUTTER CONNECTED TO EXIST DOWNPIPE
MECHANICAL VENTILATION TO BATHROOMS TO EXTRACT 15 LITRES/SEC.
BACKGROUND VENTILATION BY WINDOW TRICKLE VENTS TO ALL NEW HABITABLE ROOMS WITH A TOTAL FREE AREA OF 8000 mm².
DRAINAGE 100 DIA FLEXIBLE JOINTED STONEWARE PIPES LAID TO 1 IN 40 FALL & SURROUNDED WITH 150 PEA SHINGLE. DRAINS BRIDGED WITH R.C. LINTELS WHERE PASSING THRO' BWK

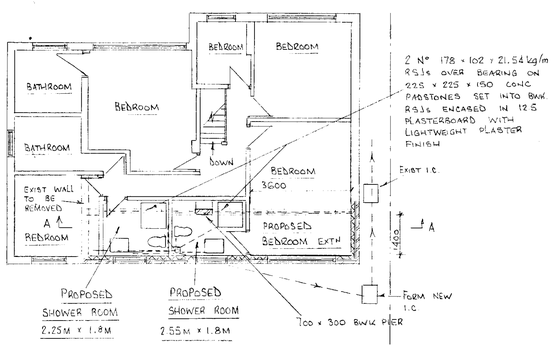

PLAN FIRST FLOOR

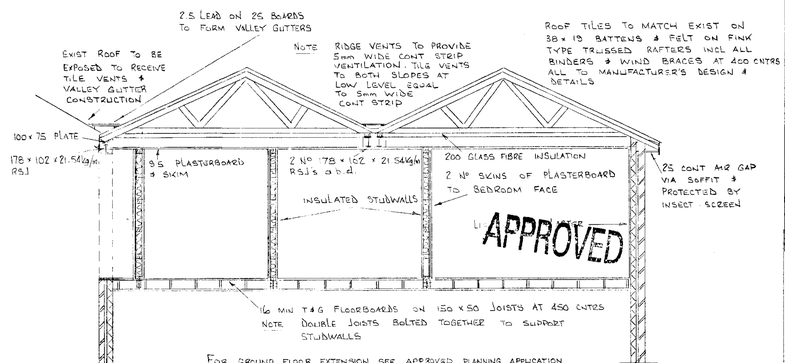

FOR GROUND FLOOR EXTENSION SEE APPROVED PLANNING APPLICATION Nº 98/69876 DATED 24 JUNE 1998 & BUILDING CONTROL FULL PLANS APPROVAL FP 98/8883 DATED 14 JUNE 1998

SECTION A-A

PROPOSED FIRST FLOOR REAR EXTENSION FOR MR M SARWAR
AT: 79 BARKHAM ROAD WOKINGHAM BERKSHIRE RG41 2JR

SCALES 1:100
1:50

DATE FEB. 2001

AMD

THIS DRAWING MUST NOT BE SCALED ALL DIMENSIONS MUST BE VERIFIED ON SITE