
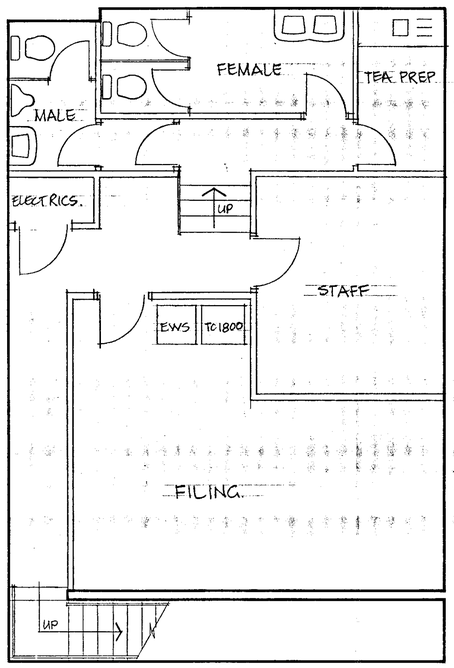


BASEMENT PLAN

NOTE
TELE. LINK REQ'D
BETWEEN BOT &
TC 1800

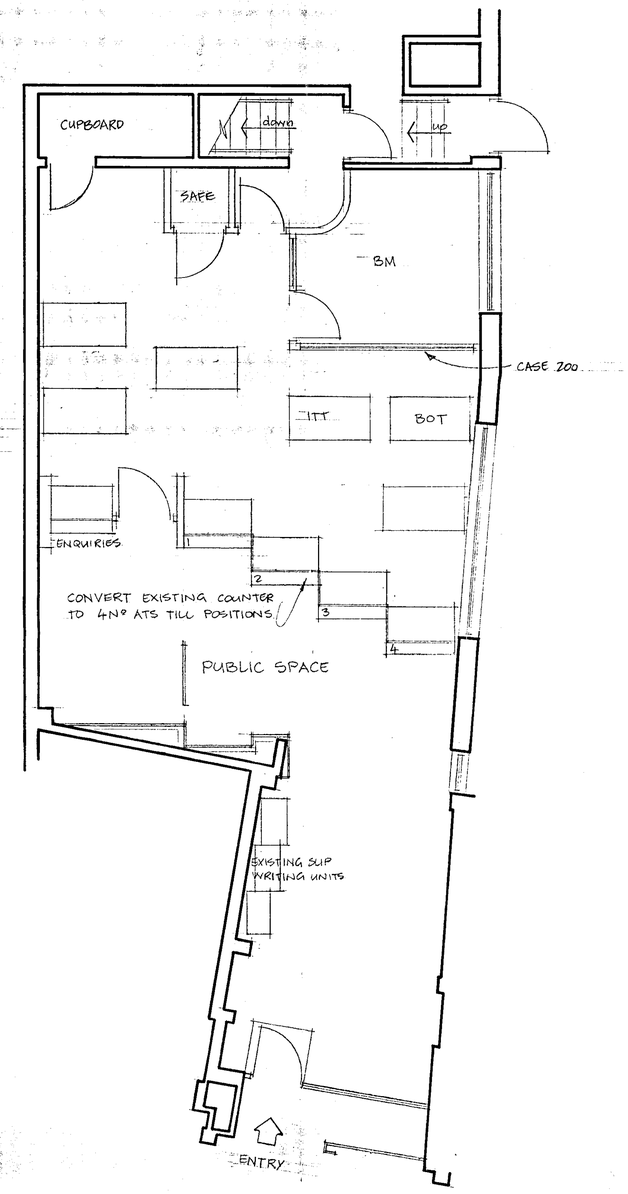

GROUND FLOOR PLAN

08 MAR 2000 08 17

NOTES

NO CHANGE TO PUBLIC SPACE FLOOR AREA

PROPOSALS

1 CONVERT EXISTING COUNTER TO 4Nº ATS TILL POSITIONS

2 SITE EWS, BOT & TC 1800

REVISIONS

		DATE	
A	PKR	15/3/88	CHANGED POSITION OF BOT

08 MAR 2000 08 17

ABBEY NATIONAL BUILDING SOCIETY
PREMISES DEPARTMENT
27 BAKER ST. LONDON W1. TEL. 01 486 5544

BRANCH/PREMISES
WOKINGHAM

ADDRESS
26-28 MARKET PLACE
WOKINGHAM
BARKSHIRE RG11 1AD

PROJECT/TITLE
[redacted]
LAYOUT AS EXISTING

PROJECT CO-ORDINATOR
R. PRICE

SCALE
1:50

DRAWING NUMBER
AS EXISTING SURV-01

REVISION
A

DRAWN BY
PKR

DATE
17 FEB '87

SHEET SIZE A1 841 x 594


DB1006

Provide and fix new sanitary fittings and cubicles to Toilets as shown. Adapt extg drainage and cold water services to suit.
Provide new ventilation system to toilets and staff room.

Provide new kitchen units to staff room as shown.


Take out extg boiler and water heater to staff room and cart away. Remove all redundant pipework.

Electrics cupboard to house AN dist boards, A/C panel.
NOTES:
1.Extg supply 3 phase.
2.Fire alarm panel to be linked to centre.

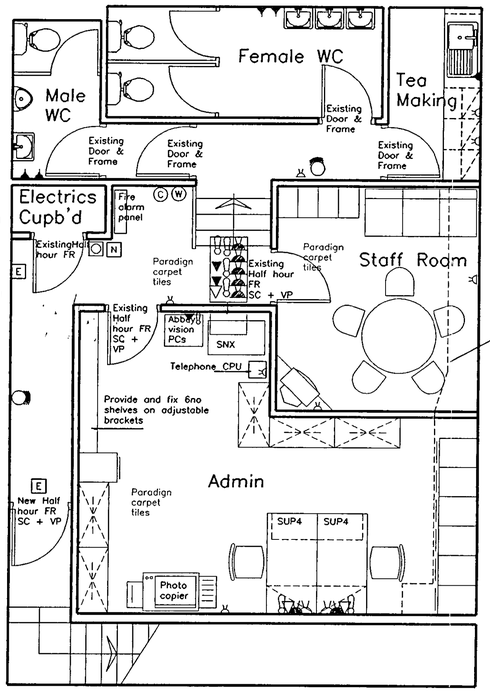

Existing drop air duct bulkhead.

Basement Plan

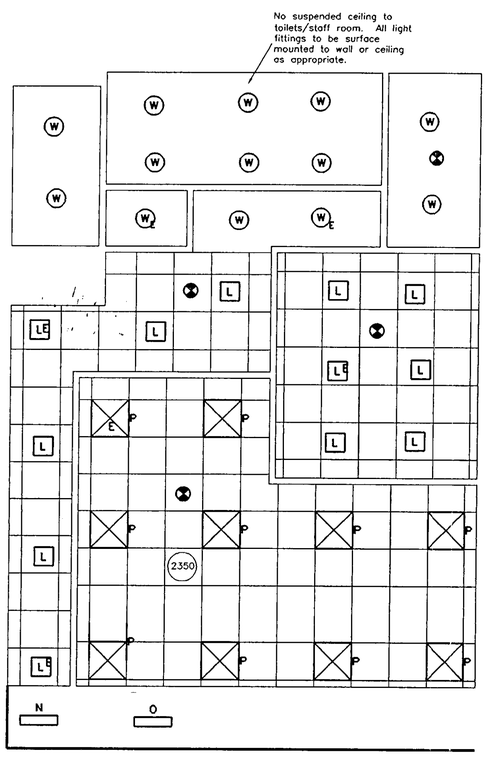

Basement Ceiling Layout

Extg panels and time clocks


Extg BTDP

Safes Cupboard: Allow provisional sum for structural support to new safes over basement staircase. Adapt extg stair bulkhead to house Lichfield safe.

Break out opening in extg wall and install new lintel over to Structural Engineer's detail.

Install new double doors and standard ironmongery to suit Safes Cupboard.

Extg BT DP, electrical panels and time clocks to be retained

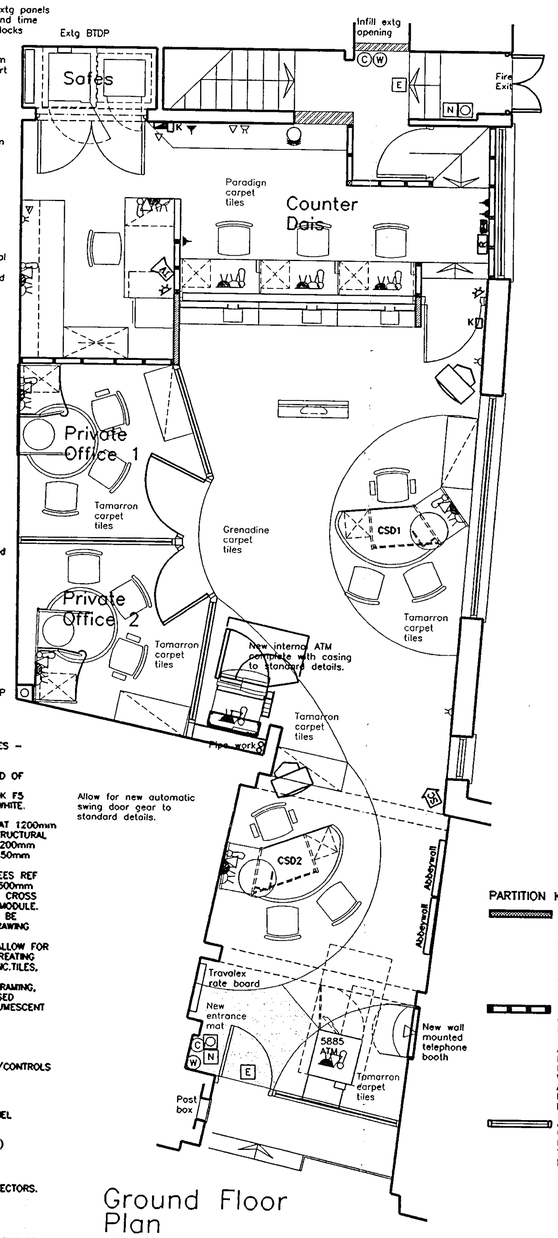

Ground Floor Plan

Finishes:

All new finishes throughout as latest Abbey National standard specification.

Air Conditioning:

New system to be installed in accordance with Abbey National standard performance specification. Specialist to advise on layout and location of external condensers.

Allow for new automatic swing door gear to standard details.

SUSPENDED CEILING

ARMSTRONG MICROLOOK DUNE PLUS TILES -
SIZE- 15x600x600 REF.9113TMOS
COLOUR- QUARTZ
TILE RATING-CLASS "0" SURFACE SPREAD OF FLAME TO BS 476.
SUSPENSION SYSTEM-ARMSTRONG TRULOK F5 15mm WIDE EXPOSED GRID. COLOUR- WHITE.
INSTALLATION:
MAIN RUNNERS REF 3000 AWT SPACED AT 1200mm CTS SECURELY FIXED TO, AND FROM, STRUCTURAL SOFFITE, WITH APPROVED HANGERS AT 1200mm MAX CTS. LAST HANGER TO BE WITHIN 450mm FROM ADJACENT WALL FACE.
FLUSH FITTING 1200mm LONG CROSS TEES REF 1200 AWT TO SPAN MAIN RUNNERS AT 600mm CTS AND SUB DIVIDED WITH 600m LONG CROSS TEES AT 600m CTS TO FORM 600x600 MODULE.
WHITE PERIMETER TRIM REF T1924MA TO BE SCREWED TO PERIMETER OF WALL AS DRAWING No JN-SPECR-02.
ADDITIONAL HANGERS TO BE FITTED TO ALLOW FOR ANY FITTINGS SUPPORTED BY CEILING, CREATING POINT LOADING, OR DISTRIBUTED LOAD INC.TILES, IN EXCESS OF 6.5kg/m2.
ALL BULKHEADS SUPPORTED FROM SW FRAMING, SW PERIMETER TRIMS AND TIMBER EXPOSED ABOVE CEILING TO BE PAINTED WITH INTUMESCENT PAINT CLASS "0".

GENERAL ARRANGEMENT LEGEND

- TV — CCTV WALL MOUNTED MONITOR/CONTROLS
- R — RISING SCREEN CONTROLS
- K — INTRUDER ALARM KEY PAD
- INTRUDER ALARM CONTROL PANEL
- STILLS CAMERA PANEL
- SC — STILLS CAMERA(WITH DATE/TIME)
- PEEPING DOM CCD
- DT 450 SERIES MOVEMENT DETECTORS.

LIGHTING LEGEND

- G — EXTRA LOW VOLTAGE TILT AND ROTATE FOR PLANTS AND DISPLAYS INCLUDING 5070 ATM's.
- I — 13 WATT PLC SMALL DIAMETER DOWNLIGHTER WITH EMERGENCY PACK IF DENNOTED.
- J — 600 X 600mm 4 x 18 WATT TUBE. FLUORESCENT LUMINAIRE WITH MATT ALUMINIUM LOUVRE. TO BE FITTED WITH AN ADDITIONAL EMERGENCY PACK IF DENOTED.
- P — 600 X 600mm 3 x 18 WATT TUBE. FLUORESCENT WITH MATT ALUMINIUM LOUVRES.TO BE FITTED WITH AN EMERGENCY PACK IF DENOTED.
- L — 300 X 300mm 2 x 18 WATT PL FLUORESCENT LUMINAIRE WITH MATT ALUMINIUM LOUVRE. TO BE FITTED WITH AN ADDITIONAL EMERGENCY PACK IF DENOTED.
- W — 16 WATT 2D SURFACE MOUNTED FITTING TO BE FITTED WITH AN ADDITIONAL NON MAINTAINED EMERGENCY PACK IF DENOTED. (WALL MOUNTED WHERE HEADROOM RESTRICTED)
- N — 28 WATT 2D LUMINAIRE WITH 3 HOUR EMERGENCY FACILITY (MAINTAINED)
- O — 28 WATT 2D LUMINAIRE
- Tx — 2 x 26 WATT PLC RECESSED COMPACT DOWNLIGHTWER, FINHISED WHITE COMPLETE WITH SEALED FRONT GLASS. (EXTERIOR USE)
- V — EXTERIOR EMERGENCY LUMINAIRE FOR FIRE ESCAPES

NB. EMERGENCY LIGHTING TO BE PROVIDED TO ALL AREAS INDICATED TO BS.5266 Pt1 1988

FIRE ALARM LEGEND

- FIRE ALARM SOUNDER
- FIRE ALARM "BREAK GLASS" CALL POINT.
- SMOKE DETECTOR
- C — CARBON DIOXIDE EXTINGUISHER
- W — WATER BASED EXTINGUISHER
- E — "FIRE EXIT" SIGNS
- N — GENERAL FIRE NOTICES

ALL FIRE EXTINGUISHERS TO BE FITTED ON WALL BRACKETS IN LOCATIONS INDICATED, AND CLASSIFICATION/USAGE SELF ADHESIVE NOTICE TO BE POSITIONED IMMEDIATELY ABOVE.

ELECTRICAL LEGEND

- FLUSH MOUNTED 1 GANG 13 AMP SWITCHED SOCKET OUTLET.
- FLUSH MOUNTED 2 GANG 13 AMP SWITCHED SOCKET OUTLET (SPECIFIC HEIGHTS NOTED ADJACENT) OTHERWISE NORMAL HEIGHT ABOVE SKIRTING.
- MK 13 AMP 2 GANG SWITCHED SOCKET REF 2747/RED (WALL MOUNTED) MK 13 AMP 2 GANG SWITCHED SOCKET PLATE REF CS3273/RED (FLOOR MOUNTED)
- FLUSH MOUNTED 13 AMP UNSWITCHED FUSED SPUR BY ELECTRICIAN FOR USE BY OTHERS.
- FLUSH MOUNTED 13 AMP SWITCHED FUSED SPUR
- DATA CABLE OUTLET PDS WIRING.
- DEDICATED BT LINE
- BT TELEPHONE EXTENSION OUTLET. ELECTRICIAN TO PROVIDE CONDUIT AND BACK BOX FOR BT.
- FAX LINE


NB . ALL WIRING TO BE CARRIED OUT IN ACCORDANCE WITH THE IEE WIRING REGULATIONS-16th EDITION

REFER TO ELECTRICAL SPECIFICATION FOR MANUFACTURERS REFERENCES OF ABOVE

FITTINGS AND ELECTRICAL INSTALLATION ETC.
IMPORTANT - ALL WIRING ABOVE SUSPENDED CEILING TO BE SUPPORTED IN CABLE TRAYS OR IN CONDUIT.
NO WIRING TO BE STRUNG ACROSS CEILING. ELECTRICIAN TO PROVIDE CABLE TRAYS ETC FOR ALL OTHER SERVICES.

PARTITION KEY

- BULLET RESISTANT WALL TO BE CONSTRUCTED FROM SW STUD PARTITION FACED ON PUBLIC SIDE WITH PLASTECHNOL PPP23 OR TEXTILE BONDING ARMOURTECH SCREENING. OTHER SIDE FACED WITH 12.5mm PLASTERB'D & 5mm NOM SKIM. 75x50 SW REGULARISED STUD PARTITIONING.
- NEW STUD PARTITION TO BE CONSTRUCTED FROM 100x50 REGULARISED SW STUDS AT 450 CTS. 100x50 SW SOLE & HEAD PLATES AND HORIZONTAL NOGGINS AT 900 MAX CENTRES TO SUIT PLASTERB'D. FACED BOTH SIDES WITH 12.5mm WALLBOARD AND 5mm NOM SKIM. ALL JOINTS TO BE FILLED AND TAPED, PRIOR TO SKIMMING. MAX HEIGHT THIS CONSTRUCTION=2800
- ASH FRAMED 12.8mm LAMINATED GLASS PARTITION TO BE FULL HEIGHT FROM FFL TO U/S SUS/CEILING. CONSTRUCTED TO DETAIL DRAWING No PTN/STD/006

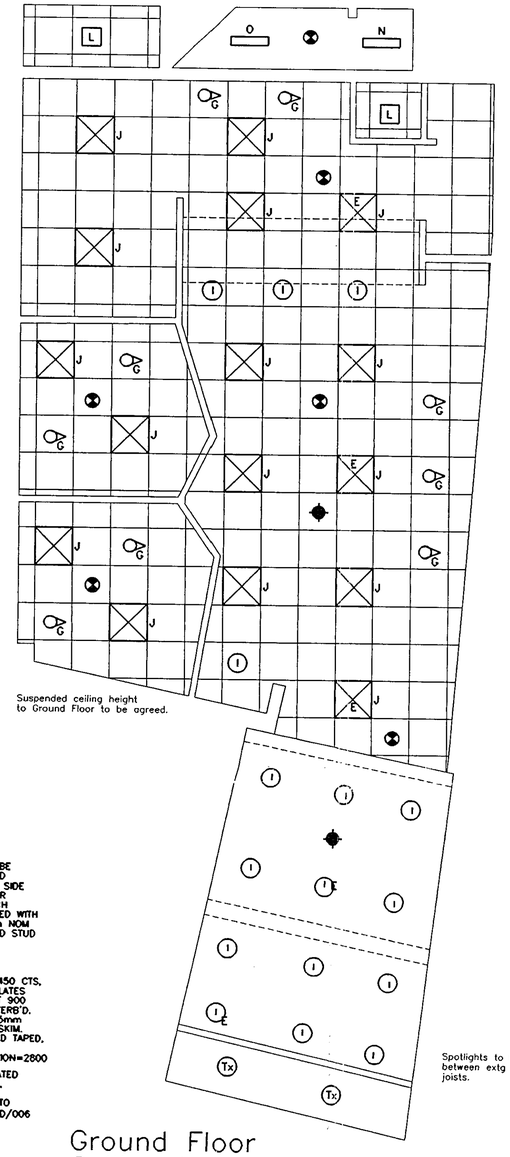

Suspended ceiling height to Ground Floor to be agreed.

Ground Floor Ceiling Layout

Spotlights to front area between extg exposed timber joists.

COUNTERS

NEW 3 POSITION RISING SCREEN COUNTER

CONSTRUCT NEW LOW LEVEL CUPBOARDS AT REAR OF COUNTER WITH SLIDING ASH DOORS AS STANDARD DETAIL DRAWING No RS/STD/A116c.
NEW RAISED FLOOR TO BE 380mm HIGH AND FORMED USING MEDIUM DUTY COMPUTER FLOORING INCLUDING 2no STEPS UP CONSTRUCTED IN 25mm M.D.F. ON S.W. FRAMING.
SUPPLY AND FIX 1no QUEUE BARRIERS FIXED TO MANUFACTURERS INSTRUCTIONS.

WORKTOP

NEW CASH COUNTING WORKTOP IN SECURE AREA TO BE 700mm DEEP AND CONSTRUCTED OF 30mm M.D.F. WITH BULLNOSE FRONT EDGES FINISHED IN GREY LACQUER. SHELVES OVER WORKTOP TO BE CONSTRUCTED SAME. 300mm DEEP AND FITTED ON ADJUSTABLE SPUR BRACKETS @ APPROX 900mm c/c's
HEIGHT CLEARANCE TO UNDERSIDE OF WORKTOP TO BE min 725mm TO ACCOMODATE DISC ARCHIVE CABINET AND FREE STANDING PEDESTAL UNDER.

SAFES

SAFES TO BE LOCATED IN NEW SECURE CUPBOARD SHOWN. CUPBOARD TO BE FITTED WITH DOUBLE DOORS. SHELVING WITHIN CUPBOARD TO BE AS STANDARD LAYOUT. SAFES TO BE BOLTED DOWN TO 150mm HIGH CONCRETE PLINTH. MAIN SAFE TO BE CHUBB EUROSAFE GRADE IV size 40 FITTED WITH SEISMIC DETECTOR ALARM.
FREE ISSUE 48 KEY SECURE CABINET AND ASH RAIL WITH 3no CHROMED CUP HOOKS FOR SAFE KEY STEMS.

STAFFROOM

SUPPLY AND FIT THE FOLLOWING KITCHEN UNITS FROM COPPERFIELD INTERIORS Ltd tel 0384 373754:-

ALL UNITS FROM "CHATSWORTH" KITCHEN UNIT RANGE.

- 1no STAINLESS STEEL SINK AND TAPS ref S1
- 1no 1000mm BASE UNITS ref B10
- 3no 500mm BASE UNITS ref B6
- 3no 1000mm WALL UNITS ref UW10
- 1no 200mm TOWEL UNIT ref TB2
  600mm VOID FOR FRIDGE
  WASTEMASTER AUTOBIN ref A90
  END SUPPORT PANEL
- 1no Lec NE 142 FRIDGE SUPPLIED BY PURCHASING
- 1no MERRYCHEF MWAVE SUPPLIED BY PURCHASING

ALLOW FOR 2800mm FORMICA FIREDUST WORKTOP.
ALLOW FOR 200 x 150mm CERAMIC WALL TILES BY H & R JOHNSON ref FLCE 5A TO BE FIXED BETWEEN WORKTOP AND WALL UNITS .(3 courses)
INCLUDE FOR CONTINUOUS PLINTH, PELMET AND CORNICE TO ALL UNITS.

PROVIDE AND FIX 1no 1200mm ø DINING TABLE FROM COPPERFIED INTERIORS.

NOTES

NO DIMENSIONS TO BE SCALED FROM THIS DRAWING. CONTRACTORS, SUB-CONTRACTORS AND SUPPLIERS MUST VERIFY ALL DIMENSIONS ON SITE BEFORE CARRYING OUT ANY WORK OR MAKING ANY SHOP DRAWINGS. IF IN DOUBT ASK PROJECT MANAGER.

Generol Notes:

1. A full measured survey is required prior to work commencing.
2. All structurol details for new beams/steelwork to be provided by Structural Engineer prior to work commencing.
3. Both Planning and Listed Building Consent will be required prior to work commencing. It is assumed the building is Grade 2 listed.
5. Landlord's consent to be obtained by others.

REVISIONS

REV	BY	DATE

SUPERSEDED

SUPERSEDED

D.G.Pudney. LTD.
Keswick House.
53 Worple Road.
Isleworth.
TW7 7AY.
Telephone: 0181 568 0881/2/3/4
Fax: 0181 568 0827

CLIENT
The Abbey National Group

PROPERTY
Wokingham

ADDRESS
26-28 Market Place
Wokingham
Berkshire RG11 14D


PROJECT/TITLE
Proposed Alterations
Feasibility Layout

SCALE	1/50	DRAWN	BM
		CHECKED	
PROJECT NUMBER	99/2028	DATE	Dec 1999
DRAWING NUMBER	1521/99/01	REVISION	


SUPERSEDED

PLUMBING WORKS

MAKE SAFE AND STRIP OUT ALL EXISTING PLUMBING PIPEWORK AND FITTINGS TO TEA PREP ROOM, LADIES AND GENTS TOILETS. FIT KITCHEN SINK TOP & TAPS INTO NEW WORKTOP OF KITCHEN UNITS. SUPPLY AND FIX UNDER SINK WATER HEATER TO KITCHEN SINK TO SERVE KITCHEN SINK AND BOTH TOILET AREAS. SUPPLY AND INSTALL 2 No. ARMITAGE SHANKS ORBIT 3922K3V SINKS INTO VANITY UNIT. SUPPLY AND INSTALL 3 No. ARMITAGE SHANKS WENTWORTH 150601A TOILETS WITH WHITE SEATS AND COVERS. SUPPLY AND INSTALL ARMITAGE SHANKS WENTWORTH 535x430 BASIN WITH OVA PEDESTAL. SUPLY AND INSTALL 6No. ARMITAGE SHANKS ALTERNA DUADRANT 2 1/2" PILLAR TAPS TO HAND BASINS. SANITARY FITTINGS TO BE WHITE, TAPS & FITTINGS CHROME FINISHED.

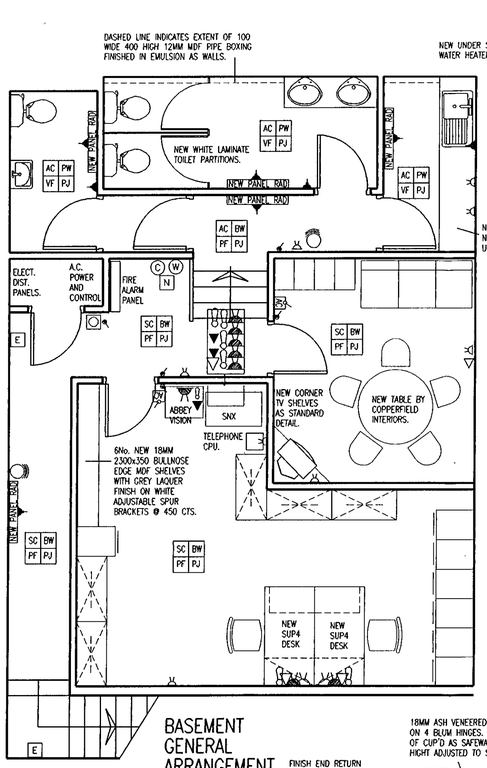


BASEMENT GENERAL ARRANGEMENT



LADIES VANITY UNIT

COUNTER CUP'D ELEVATION

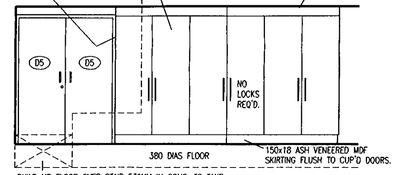

BUILD UP FLOOR OVER STAIR 530MM IN CONC. TO TAKE MAIN NIGHT SAFE. SITE TIME DELAY SAFE ON EXISTING CONC. PLATFORM.


REMOVALS

STRIP OUT GROUND FLOOR GENERALLY TO INCLUDE ALL FITTINGS, SUSPENDED CEILINGS, CARPETS AND WALL COVERINGS. REMOVE ALL COUNTER WORKS AND FIXED JOINERY EXCEPT WINDOW BEDS AND LININGS. REMOVE SHOPFRONT WHEN SITE SECURE.


RETAIN ALL EXPOSED TIMBERWORK TO FRONT AREA. RETAIN ABBEY VISION T.V. BRACKET TO FRONT OF BRANCH.

BASEMENT AREA: REMOVE ALL TOILET FITTINGS, CUBICALS & KITCHEN FITTINGS [PHASE TO RETAIN SITE FACILITIES] REMOVE EXISTING WALL COVERINGS, CARPETS AND THERMOPLASTIC FLOOR TILES.

RETAIN EXISTING PARTITIONS, DOORS AND JOINERY.

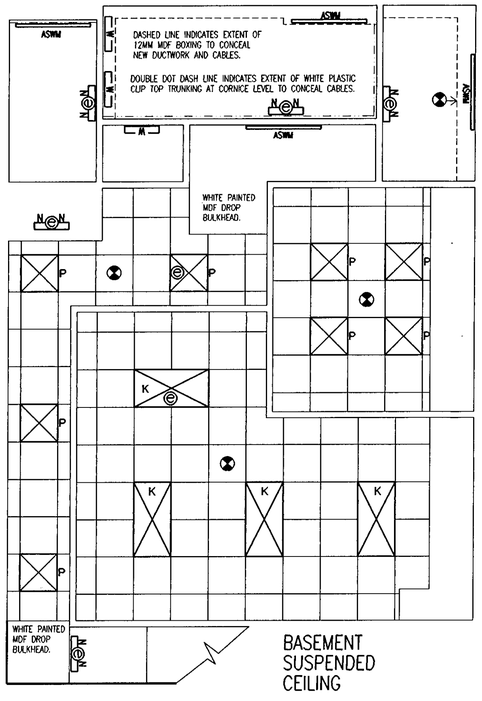


BASEMENT SUSPENDED CEILING

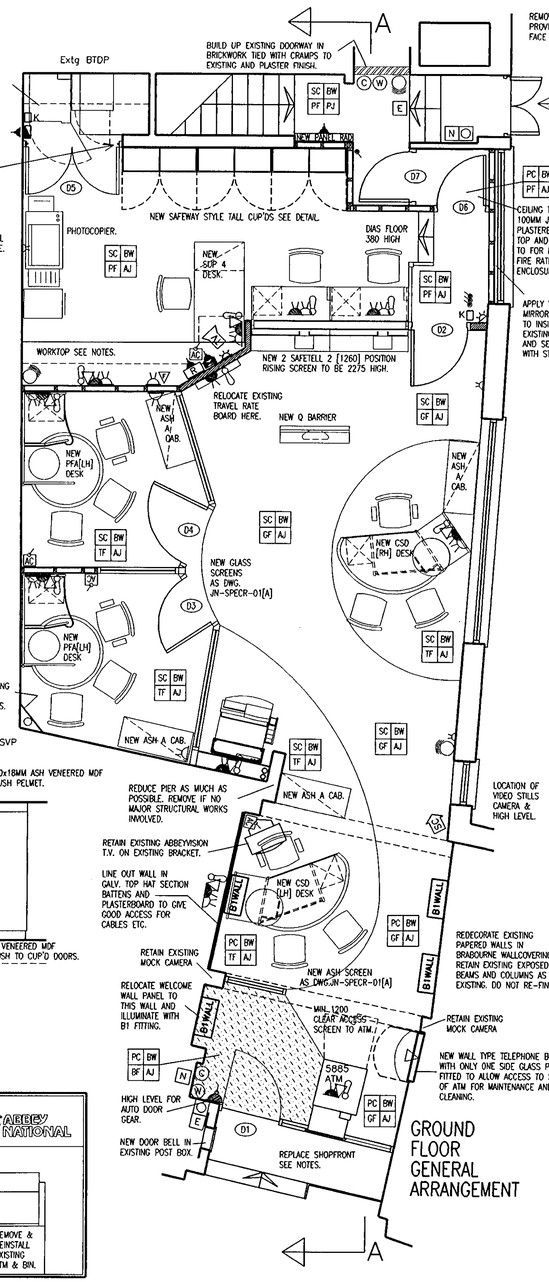

GROUND FLOOR GENERAL ARRANGEMENT




SHOPFRONT ELEVATION

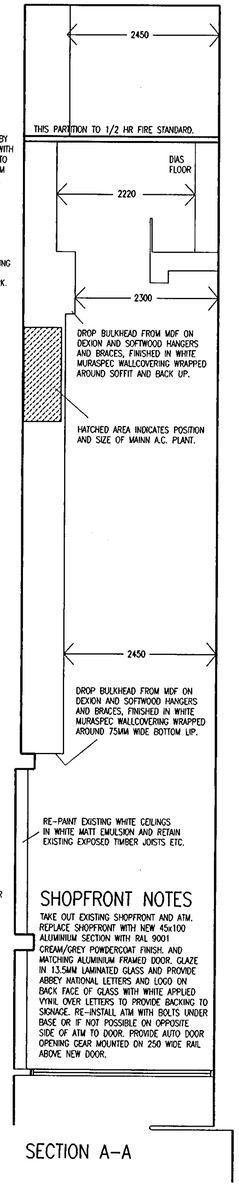

SHOPFRONT NOTES

TAKE OUT EXISTING SHOPFRONT AND ATM. REPLACE SHOPFRONT WITH NEW 45x100 ALUMINIUM SECTION WITH RAL 9001 CREAM/GREY POWDERCOAT FINISH. AND MATCHING ALUMINIUM FRAMED DOOR. GLAZE IN 13.5MM LAMINATED GLASS AND PROVIDE ABBEY NATIONAL LETTERS AND LOGO ON BACK FACE OF GLASS WITH WHITE APPLIED VYNIL OVER LETTERS TO PROVIDE BACKING TO SIGNAGE. RE-INSTALL ATM WITH BOLTS UNDER BASE OR IF NOT POSSIBLE ON OPPOSITE SIDE OF ATM TO DOOR. PROVIDE AUTO DOOR OPENING GEAR MOUNTED ON 250 WIDE RAIL ABOVE NEW DOOR.

SECTION A-A

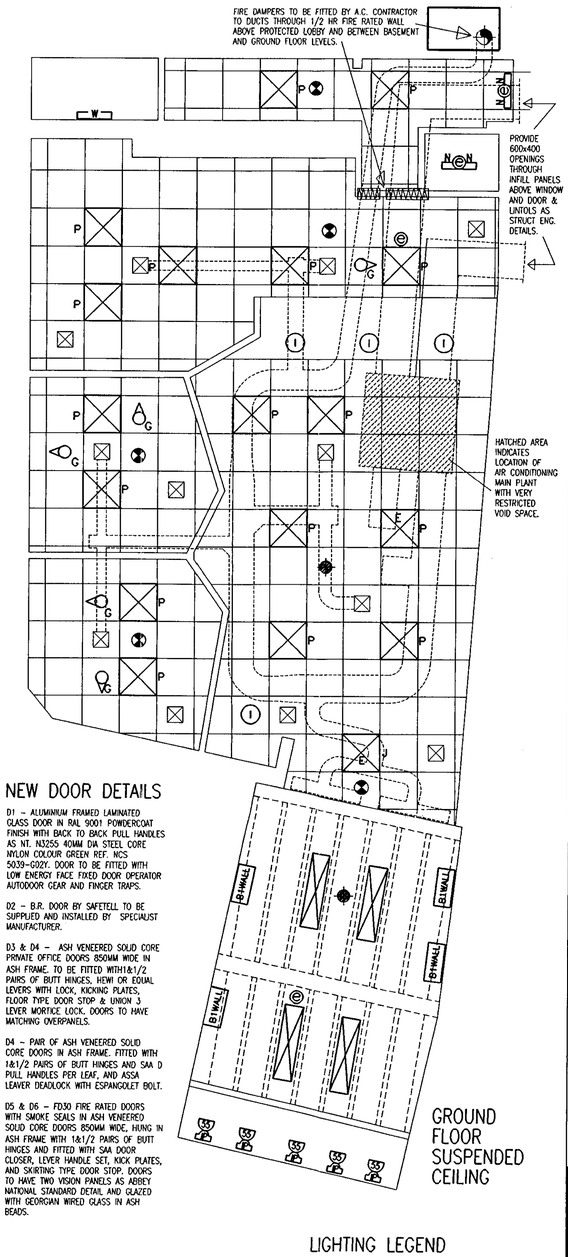

GROUND FLOOR SUSPENDED CEILING

NEW DOOR DETAILS

D1 – ALUMINIUM FRAMED LAMINATED GLASS DOOR IN RAL 9001 POWDERCOAT FINISH WITH BACK TO BACK PULL HANDLES AS NT. N3255 40MM DIA STEEL CORE NYLON COLOUR GREEN REF. NCS 5039–G92Y. DOOR TO BE FITTED WITH LOW ENERGY FACE FIXED DOOR OPERATOR AUTODOOR GEAR AND FINGER TRAPS.

D2 – B.R. DOOR BY SAFETELL TO BE SUPPLIED AND INSTALLED BY SPECIALIST MANUFACTURER.

D3 & D4 – ASH VENEERED SOLID CORE PRIVATE OFFICE DOORS 850MM WIDE IN ASH FRAME. TO BE FITTED WITH1&1/2 PAIRS OF BUTT HINGES, HEWI OR EQUAL LEVERS WITH LOCK, KICKING PLATES, FLOOR TYPE DOOR STOP & UNION J LEVER MORTICE LOCK. DOORS TO HAVE MATCHING OVERPANELS.

D4 – PAIR OF ASH VENEERED SOLID CORE DOORS IN ASH FRAME. FITTED WITH 1&1/2 PAIRS OF BUTT HINGES AND SAA D PULL HANDLES PER LEAF, AND ASSA LEAVER DEADLOCK WITH ESPANGOLET BOLT.

D5 & D6 – FD30 FIRE RATED DOORS WITH SMOKE SEALS IN ASH VENEERED SOLID CORE DOORS 850MM WIDE, HUNG IN ASH FRAME WITH 1&1/2 PAIRS OF BUTT HINGES AND FITTED WITH SAA DOOR CLOSER, LEVER HANDLE SET, KICK PLATES, AND SKIRTING TYPE DOOR STOP. DOORS TO HAVE TWO VISION PANELS AS ABBEY NATIONAL STANDARD DETAIL AND GLAZED WITH GEORGIAN WIRED GLASS IN ASH BEADS.

SUSPENDED CEILING

ARMSTRONG MICROLOOK DUNE PLUS TILES – SIZE– 15x600x600 REF.911.1M05 COLOUR– QUARTZ
TILE RATING–CLASS "0" SURFACE SPREAD OF FLAME TO BS. 476.
SUSPENSION SYSTEM–ARMSTRONG TRULOK F5 15mm WIDE EXPOSED GRID. COLOUR– WHITE.
INSTALLATION :
MAIN RUNNERS REF 3000 AWT SPACED AT 1200mm CTS SECURELY FIXED TO, AND FROM, STRUCTURAL SOFFITE, WITH APPROVED HANGERS AT 1200mm MAX CTS. LAST HANGER TO BE WITHIN 450mm FROM ADJACENT WALL FACE.
FLUSH FITTING 1200mm LONG CROSS TEES REF 1200 AWT TO SPAN MAIN RUNNERS AT 600mm CTS AND SUB DIVIDED WITH 600m LONG CROSS TEES AT 600m CTS TO FORM 600x600 MODULE.
WHITE PERIMETER TRIM REF 11924HA TO BE SCREWED TO PERIMETER OF WALL AS DRAWING No JN–SPECR–02.
ADDITIONAL HANGERS TO BE FITTED TO ALLOW FOR ANY FITTINGS SUPPORTED BY CEILING, CREATING POINT LOADING, OR DISTRIBUTED LOAD INC.TILES, IN EXCESS OF 6.5Kg/m2.
ALL BULKHEADS SUPPORTED FROM SW FRAMING, SW PERIMETER TRIMS AND TIMBER EXPOSED ABOVE CEILING TO BE PAINTED WITH INTUMESCENT PAINT CLASS "0".

GENERAL LEGEND

- TV — CCTV WALL MOUNTED MONITOR/CONTROLS
- R — RISING SCREEN CONTROLS
- K — INTRUDER ALARM KEY PAD
- INTRUDER ALARM CONTROL PANEL
- STILLS CAMERA PANEL
- SC — STILLS CAMERA(WITH DATE/TIME)
- PEEPING DOM CCD
- DT 450 SERIES MOVEMENT DETECTORS.

FIRE ALARM LEGEND

- FIRE ALARM SOUNDER
- FIRE ALARM "BREAK GLASS" CALL POINT.
- SMOKE DETECTOR
- C — CARBON DIOXIDE EXTINGUISHER
- W — WATER BASED EXTINGUISHER
- E — 'FIRE EXIT' SIGNS
- N — GENERAL FIRE NOTICES

ALL FIRE EXTINGUISHERS TO BE FITTED ON WALL BRACKETS IN LOCATIONS INDICATED, AND CLASSIFICATION/USAGE SELF ADHESIVE NOTICE TO BE POSITIONED IMMEDIATELY ABOVE.

ELECTRICAL LEGEND

- FLUSH MOUNTED 1 GANG 13 AMP SWITCHED SOCKET OUTLET.
- FLUSH MOUNTED 2 GANG 13 AMP SWITCHED SOCKET OUTLET (SPECIFIC HEIGHTS NOTED ADJACENT) OTHERWISE NORMAL HEIGHT ABOVE SKIRTING.
- MK 13 AMP 2 GANG SWITCHED SOCKET REF 2747/RED (WALL MOUNTED) MK 13 AMP 2 GANG SWITCHED SOCKET PLATE REF CS3273/RED (FLOOR MOUNTED)
- FLUSH MOUNTED 13 AMP UNSWITCHED FUSED SPUR BY ELECTRICIAN FOR USE BY OTHERS.
- FLUSH MOUNTED 13 AMP SWITCHED FUSED SPUR
- DATA CABLE OUTLET POS WIRING.
- DEDICATED BT LINE
- BT TELEPHONE EXTENSION OUTLET. ELECTRICIAN TO PROVIDE CONDUIT AND BACK BOX FOR BT.
- FAX LINE
- LIGHT SWITCH
- AC — AIR CONDITIONING CONTROL UNIT.

NB . ALL WIRING TO BE CARRIED OUT IN ACCORDANCE WITH THE IEE WIRING REGULATIONS–16th EDITION NO WIRING TO BE STRUNG ACROSS CEILING. ELECTRICIAN TO PROVIDE CABLE TRAYS ETC FOR ALL OTHER SERVICES.

COUNTERS

NEW 2 POSITION RISING SCREEN COUNTER FROM SAFETELL

CONSTRUCT NEW LOW LEVEL CUPBOARDS AT REAR OF COUNTER OF SAFEWAY TYPE BUT HIGHT ADJUSTED TO SUIT AVAILABLE HEAD ROOM. 18MM ASH VEN. DOORS.
NEW RAISED FLOOR TO BE 380mm HIGH AND FORMED USING MEDIUM DUTY COMPUTER FLOORING INCLUDING 2no STEPS UP CONSTRUCTED IN 25mm M.D.F. ON S.W. FRAMING. 190 RISE 250 GOING.
SUPPLY AND FIX 1no QUEUE BARRIER TO MANUFACTURERS INSTRUCTIONS.

WORKTOP

NEW CASH COUNTING WORKTOP IN SECURE AREA TO BE 700mm DEEP AND CONSTRUCTED OF 30mm M.D.F. WITH BULLNOSE FRONT EDGES FINISHED IN GREY LACQUER. SHELVES OVER WORKTOP TO BE CONSTRUCTED SAME, 300mm DEEP AND FITTED ON ADJUSTABLE SPUR BRACKETS @ APPROX 900mm c/c's
HEIGHT CLEARANCE TO UNDERSIDE OF WORKTOP TO BE min 725mm TO ACCOMODATE DISC ARCHIVE CABINET AND FREE STANDING PEDESTAL UNDER.

SAFES

SAFES TO BE LOCATED IN NEW SECURE CUPBOARD SHOWN. CUPBOARD TO BE FITTED WITH DOUBLE DOORS. SHELVING WITHIN CUPBOARD TO BE AS STANDARD LAYOUT. SAFES TO BE BOLTED DOWN TO 530mm HIGH CONCRETE PLINTH. MAIN SAFE TO BE CHUBB EUROSAFE GRADE IV size 40 FITTED WITH SEISMIC DETECTOR ALARM.
FREE ISSUE 48 KEY SECURE CABINET AND ASH RAIL WITH 3no CHROMED CUP HOOKS FOR SAFE KEY STEMS.

KITCHEN


SUPPLY AND FIT THE FOLLLOWING KITCHEN UNITS FROM COPPERFIELD INTERIORS Ltd tel 01384 373754
ALL UNITS FROM "CHATSWORTH" KITCHEN UNIT RANGE.

1no STAINLESS STEEL SINK AND TAPS ref S1
1no 1000mm BASE UNITS ref B10
1no 600mm WIDE DRAWER PACK REF. D6/4
1no. CUTLERY TRAY REF. CT6
1no. WASTEWASTER AUTOBIN ref A90
1no 300mm BASE UNIT IF AVAILABLE.
1no 200mm TOWEL UNIT ref TB2
1no Lec NE 142 FRIDGE SUPPLIED BY PURCHASING
1no MERRYCHEF M'WAVE SUPPLIED BY PURCHASING

ALLOW FOR 3000mm FORMICA FIREDUST WORKTOP.

150x150 WHITE GLAZED WALLTILES TO BE PROVIDED TO BACK AND SIDES OF WORKTOP

PROVIDE AND ASSEMBLE 1no 1200mm DIA DINING TABLE FROM COPPERFIED INTERIORS IN REST ROOM.



LIGHTING LEGEND

NB. EMERGENCY LIGHTING TO BE PROVIDED TO ALL AREAS INDICATED TO BS.5266 Pt1 1988

- W — SURFACE MOUNTED 2D OPAL LUMINAIRE
- N — 28 WATT 2D LUMINAIRE WITH 3 HOUR EMERGENCY FACILITY (MAINTAINED)
- C — EXTRA LOW VOLTAGE TILT AND ROTATE FOR PLANTS AND DISPLAYS INCLUDING 5070 ATM's.
- 13 WATT PLC SMALL DIAMETER DOWNLIGHTER WITH EMERGENCY PACK IF DENNOTED. E
- K — 1200 X 600 3 x 36 WATT TUBE, FLUORESCENT LUMINAIRE WITH MATT ALUMINIUM LOUVRE. TO BE FITTED WITH AN ADDITIONAL EMERGENCY PACK IF DENOTED. E
- P — 600 X 600mm 3 x 18 WATT TUBE, FLUORESCENT WITH MATT ALUMINIUM LOUVRES,TO BE FITTED WITH AN EMERGENCY PACK IF DENOTED. E
- B1WALL — TYPE B1 TWIN LAMP FLOURESCENT WALL MONTED UP & DOWN LIGHTER TO BE MOUNTED DIRECTLY ABOVE POSTER FRAME WITH TWO 55W LAMPS
- 2 x 36 WATT SURFACE MOUNTED DOWNLIGHTER WITH MATT ALI. LOUVRE TO CAT 2 PERFORMANCE AND WHITE BODY. EMERGENCY PACK IF DENOTED. E
- ASWM — FLUSH WALL MONTED ARROWSLIM OR EQUAL FLUORESCENT LIGHT WITH CURVED CLEAR OPAL DIFFUSER.
- REGOMNI IP 55 HALOHGEN SPOTLIGHT AT HIGH LEVEL ILLUMINATING SHOPFRONT.

C.D.M. DESIGN STATEMENT

CONSTRUCTION RISKS

DOES THE DESIGN IMPOSE SPECIFIC RISKS ASSOCIATED WITH THE FOLLOWING CONSTRUCTION ELEMENTS AND ACTIVITY ? YES/NO

1 LIFTING STEELWORK, PLANT, BULK MATERIALS ETC. YES
2 FALLING FROM PARAPETS / SHAFTS ETC. NO
3 FIRE HAZARDS BY RESTRICTED ESCAPE OR DANGEROUS MATERIALS. NO
4 CARRIAGE OF MATERIALS AROUND SITE. NO
5 RESTRICTED VENTILATION FROM CONFINED AREAS. NO
6 DANGERS FROM EXPOSED OR ADJACENT SERVICES. NO
7 ANY OTHER ELEMENT NOT LISTED ABOVE. NO

HAVE CONSTRUCTION RISKS BEEN DESIGNED OUT WHERE POSSIBLE ? YES

NOTES RELATING TO ELEMENTS LISTED ABOVE.
1 LARGE AIR CONDITIONING PLANT WILL REQUIRE LIFTING EQUIPMENT. STRUCT ENG. TO DESIGN STEELWORK TO BE MAN HANDLED ON SITE.

MAINTENANCE RISKS

ARE ANY SPECIFIC RISKS IMPOSED BY THE DESIGN IN RELATION TO THE MAINTENANCE OF THE FOLLOWING ELEMENTS OF THE BUILDING.

1 ACCESS TO HIGH LEVEL LIGHT FITTINGS ETC. YES
2 ACCESS TO MECHANICAL OR ELECTRICAL PLANT. NO
3 ACCESS TO HIGH OR DIFFICULT TO REACH AREAS OF GLAZING. NO
4 THE NEED TO USE FLAMMABLE OR DANGEROUS CHEMICALS. NO
5 STORAGE OF MAINTENANCE EQUIPMENT & MATERIALS. NO
6 ANY OTHER ELEMENT NOT LISTED ABOVE. NO

HAVE RISKS BEEN DESIGNED OUT WHERE REASONABLE. YES

NOTES RELATING TO MAINTENANCE RISKS.
1 AIR CON. PLANT LOCATED OVER OPEN FLOOR AREA TO EASE MAINTENANCE. AIR CON. PLANT WILL NEED TO BE MAINTAINED OUT OF HOURS.

IS THE CLIENT AWARE OF THEIR RESPONSIBILITIES FOR C.D.M. ? YES

FINISHES ICON KEY.

CEILING FINISH — SC BW / GF AJ — WALL FINISH
FLOOR FINISH — JOINERY FINISH

SC — SUSPENDED CEILING ARMSTRONG DUNE + TILES AS SPECIFIED
PC — PLASRTERBOARD CEILING PAINTED WHITE MATT EMULSION
AC — EXISTING ARTEX CEILING PREPARED AND RE–ARTICED TO COVER PATTERN CHANGE WHERE CABLES RE–LOCATED
BW — PREPARE WALLS AND FINISH IN MURASPEC BRAYBOURNE
PW — PREPARE WALLS AND DECORATE IN MATT MAGNOLIA EMULSION.
AJ — NEW ASH DOORS, SKIRTINGS & ARCHITRAVES AS DWG.JN–SPECP–01[A]
PJ — PAINT EXISTING DOORS, ARCHITRAVES AND SKIRTINGS UNDERCOAT GLOSS OIL PAINT DOORS DULUX 30103OSB TRIM WHITE.
BF — BARRIER MATTING CORAL BRUSH 551OANTHRACITE [BONAR FLOOR LTD]
GF — MODULUS GRENADINE [GREEN] CARPET TILES.
TF — MODULUS TAMMERON [BURGUNDY] CARPET TILES.
PF — MODULUS PARADIGN CARPET TILES [BLUE] GRADUS ALI MOSINGS WITH BLUEBELL INSERTS.
VF — MARLEY H.D. VYNILSHEET FLOORING CLOUD GREY [MH 203]

PARTITION KEY

BULLET RESISTANT WALL TO BE CONSTRUCTED FROM SW STUD PARTITION FACED ON PUBLIC SIDE WITH PLASTECHNOL PPP23 OR TEXTILE BONDING ARMOURTECH SCREENING. OTHER SIDE FACED WITH 12.5mm PLASTERB'D & 5mm NOM SKIM. 75x50 SW REGULARISED STUD PARTITIONING.

NEW STUD PARTITION TO BE CONSTRUCTED FROM 75x50 REGULARISED SW STUDS AT 450 CTS, 100x50 SW SOLE & HEAD PLATES AND HORIZONTAL NOGGINS AT 900 MAX CENTRES TO SUIT PLASTERB'D. FACED BOTH SIDES WITH 12.5mm WALLBOARD AND 5mm NOM SKIM. ALL JOINTS TO BE FILLED AND TAPED, PRIOR TO SKIMMING. MAX HEIGHT THIS CONSTRUCTION=2800

ASH FRAMED 12.8mm LAMINATED GLASS PARTITION TO BE FULL HEIGHT FROM FFL TO U/S SUS/CEILING. CONSTRUCTED TO DETAIL DRAWING No PTN/STD/006

REVISIONS

REV	BY	DATE	
A	BOB	22.03.00	RE–DRAWN TO WORKING DRAWING STATUS.
B	BOB	30.03.00	ACCESS PAST FRONT CSD INC. TO 1200.

SUPERSEDED

COPIES TO: SS APP FCL DG DJ ENG FILE ACCESS
PLANNING SERVICES
31 MAR 2000


D.G. DUDNEY LTD


CLIENT	The Abbey National Group
BRANCH	WOKINGHAM
ADDRESS	26–28 MARKET PLACE WOKINGHAM BERKSHIRE RG11 14D
PROJECT TITLE	PROPOSED STORE REFIT WORKING DRAWINGS
SCALE	1/50
DRAWN	BOB
CHECKED	
PROJECT NUMBER	99/2028
DATE	Dec.1999
DRAWING NUMBER	1521/99/01
REVISION	A B


BISHOPS HOUSE, 88 WORPLE ROAD, WIMBLEDON, SW19 7YZ Tel. 020 8946 6561 Fax. 020 8946 5827 Email. dgd@dgdnet.com
VAT No. 688 8648 28 REGISTERED OFFICE : BISHOPS HOUSE, 88 WORPLE ROAD, RAYNES PARK, LONDON, SW20 8NL Reg. No. 1189879

PLUMBING WORKS

MAKE SAFE AND STRIP OUT ALL EXISTING PLUMBING PIPEWORK AND FITTINGS TO TEA PREP ROOM, LADIES AND GENTS TOILETS. FIT KITCHEN SINK TOP & TAPS. INTO NEW WORKTOP OF KITCHEN UNITS. SUPPLY AND FIX UNDER SINK WATER HEATER TO KITCHEN SINK TO SERVE KITCHEN SINK AND BOTH TOILET AREAS. SUPPLY AND INSTALL 2 No. ARMITAGE SHANKS ORBIT 3022K3V SINKS INTO VANITY UNIT. SUPPLY AND INSTALL 3 No. ARMITAGE SHANKS WENTWORTH 150601A TOILETS WITH WHITE SEATS AND COVERS. SUPPLY AND INSTALL ARMITAGE SHANKS WENTWORTH 535x430 BASIN WITH OVA PEDESTAL SUPLY AND INSTALL 6No. ARMITAGE SHANKS ALTERNA QUADRANT 2 1/2" PILLAR TAPS TO HAND BASINS. SANITARY FITTINGS TO BE WHITE, TAPS & FITTINGS CHROME FINISHED.

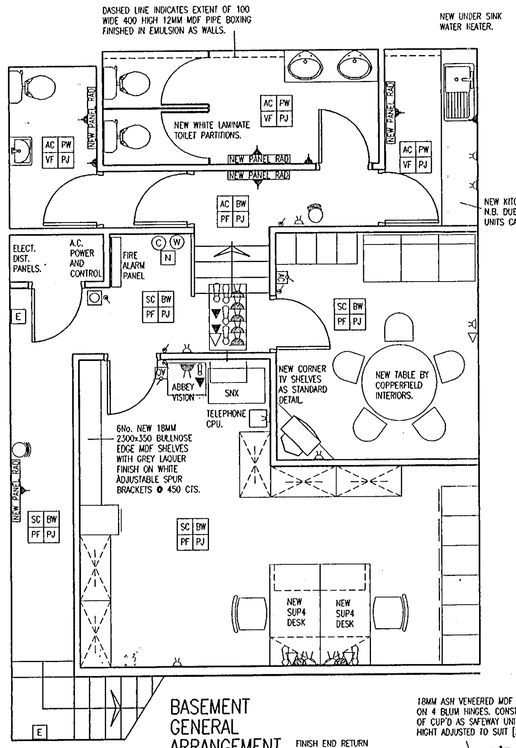

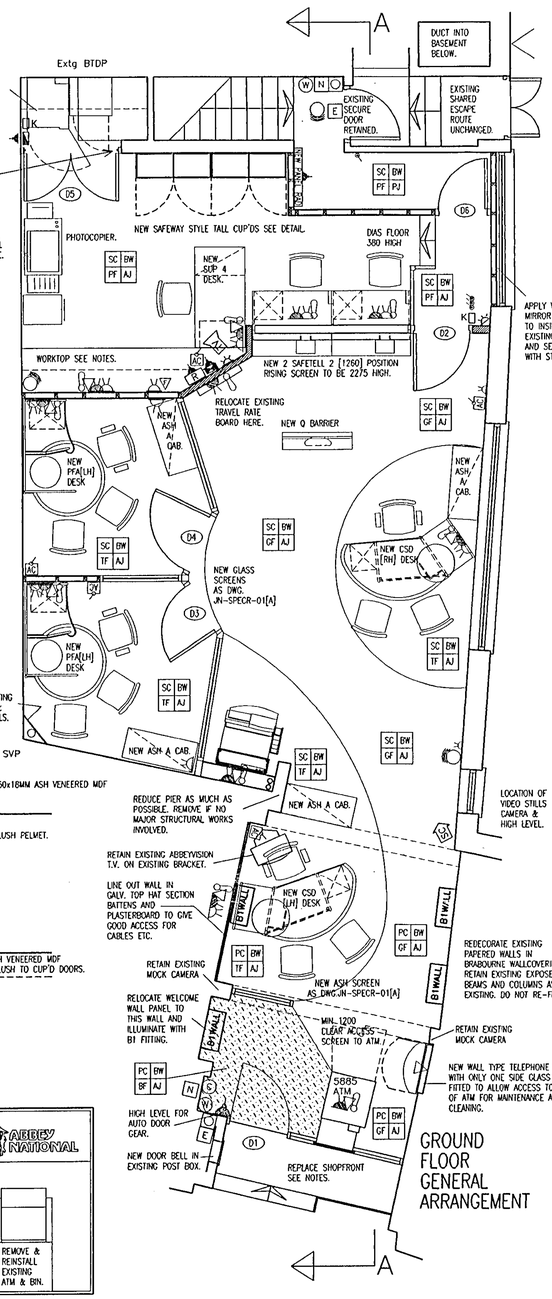


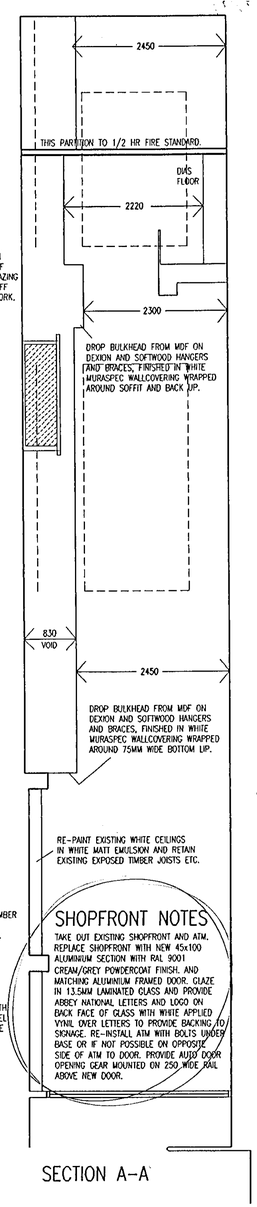

SHOPFRONT NOTES

TAKE OUT EXISTING SHOPFRONT AND ATM. REPLACE SHOPFRONT WITH NEW 45x100 ALUMINIUM SECTION WITH RAL 9001 CREAM/GREY POWDERCOAT FINISH. AND MATCHING ALUMINIUM FRAMED DOOR. GLAZE IN 13.5MM LAMINATED GLASS AND PROVIDE ABBEY NATIONAL LETTERS AND LOGO ON BACK FACE OF GLASS WITH WHITE APPLIED VYNIL OVER LETTERS TO PROVIDE BACKING TO SKRAGE. RE-INSTALL ATM WITH BOLTS UNDER BASE OR IF NOT POSSIBLE ON OPPOSITE SIDE OF ATM TO DOOR. PROVIDE AUTO DOOR OPENING GEAR MOUNTED ON 250 WIDE RAIL ABOVE NEW DOOR.

SECTION A-A

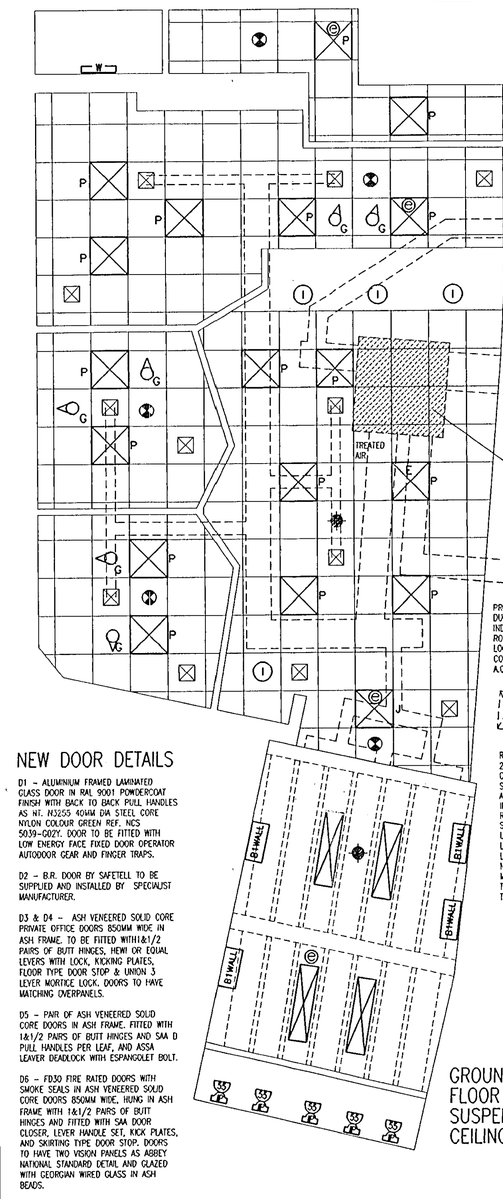

NEW DOOR DETAILS

D1 – ALUMINIUM FRAMED LAMINATED GLASS DOOR IN RAL 9001 POWDERCOAT FINISH WITH BACK TO BACK PULL HANDLES AS NT. N3255 40MM DIA STEEL CORE NYLON COLOUR GREEN REF. NCS 5039-G02Y. DOOR TO BE FITTED WITH LOW ENERGY FACE FIXED DOOR OPERATOR AUTODOOR GEAR AND FINGER TRAPS.

D2 – R.R. DOOR BY SAFETELL TO BE SUPPLIED AND INSTALLED BY SPECIALIST MANUFACTURER.

D3 & D4 – ASH VENEERED SOLID CORE PRIVATE OFFICE DOORS 850MM WIDE IN ASH FRAME. TO BE FITTED WITH1&1/2 PAIRS OF BUTT HINGES, HEWI OR EQUAL LEVERS WITH LOCK, KICKING PLATES, FLOOR TYPE DOOR STOP & UNION 3 LEVER MORTICE LOCK. DOORS TO HAVE MATCHING OVERPANELS.

D5 – PAIR OF ASH VENEERED SOLID CORE DOORS IN ASH FRAME. FITTED WITH 1&1/2 PAIRS OF BUTT HINGES AND SAA D PULL HANDLES PER LEAF, AND ASSA LEAVER DEADLOCK WITH ESPANGOLET BOLT.

D6 – FD30 FIRE RATED DOORS WITH SMOKE SEALS IN ASH VENEERED SOLID CORE DOORS 850MM WIDE, HUNG IN ASH FRAME WITH 1&1/2 PAIRS OF BUTT HINGES AND FITTED WITH SAA DOOR CLOSER, LEVER HANDLE SET, KICK PLATES, AND SKIRTING TYPE DOOR STOP. DOORS TO HAVE TWO VISION PANELS AS ABBEY NATIONAL STANDARD DETAIL AND GLAZED WITH GEORGIAN WIRED GLASS IN ASH BEADS.

GROUND FLOOR SUSPENDED CEILING

C.D.M. DESIGN STATEMENT

CONSTRUCTION RISKS

DOES THE DESIGN IMPOSE SPECIFIC RISKS ASSOCIATED WITH THE FOLLOWING CONSTRUCTION ELEMENTS AND ACTIVITY ?	YES/NO
1 LIFTING STEELWORK, PLANT, BULK MATERIALS ETC.	YES
2 FALLING FROM PARAPETS / SHAFTS ETC.	NO
3 FIRE HAZARDS BY RESTRICTED ESCAPE OR DANGEROUS MATERIALS.	NO
4 CARRIAGE OF MATERIALS AROUND SITE.	NO
5 RESTRICTED VENTILATION FROM CONFINED AREAS.	NO
6 DANGERS FROM EXPOSED OR ADJACENT SERVICES.	NO
7 ANY OTHER ELEMENT NOT LISTED ABOVE.	NO
HAVE CONSTRUCTION RISKS BEEN DESIGNED OUT WHERE POSSIBLE ?	YES

NOTES RELATING TO ELEMENTS LISTED ABOVE.
1 LARGE AIR CONDITIONING PLANT WILL REQUIRE LIFTING EQUIPMENT. STRUCT ENG. TO DESIGN STEELWORK TO BE MAN HANDLED ON SITE.


MAINTENANCE RISKS

ARE ANY SPECIFIC RISKS IMPOSED BY THE DESIGN IN RELATION TO THE MAINTENANCE OF THE FOLLOWING ELEMENTS OF THE BUILDING.	
1 ACCESS TO HIGH LEVEL LIGHT FITTINGS ETC.	YES
2 ACCESS TO MECHANICAL OR ELECTRICAL PLANT.	NO
3 ACCESS TO HIGH OR DIFFICULT TO REACH AREAS OF GLAZING.	NO
4 THE NEED TO USE FLAMMABLE OR DANGEROUS CHEMICALS.	NO
5 STORAGE OF MAINTENANCE EQUIPMENT & MATERIALS.	NO
6 ANY OTHER ELEMENT NOT LISTED ABOVE.	NO
HAVE RISKS BEEN DESIGNED OUT WHERE REASONABLE.	YES

NOTES RELATING TO MAINTENANCE RISKS.
1 AIR CON. PLANT LOCATED OVER OPEN FLOOR AREA TO EASE MAINTENANCE. AIR CON. PLANT WILL NEED TO BE MAINTAINED OUT OF HOURS.

IS THE CLIENT AWARE OF THEIR RESPONSIBILITIES FOR C.D.M. ? YES

FINISHES ICON KEY.



SC — SUSPENDED CEILING ARMSTRONG DUNE 4 TILES AS SPECIFIED.
PC — PLASRTEBOARD CEILING PAINTED WHITE MATT EMULSION.
AC — EXISTING ARTEX CEILING PREPARED AND RE-ARTEXED TO COVER PATTERN CHANGE WHERE CABLES RE-LOCATED.
BW — PREPARE WALLS AND FINISH IN MURASPEC BRAYBOURNE.
PW — PREPARE WALLS AND DECORATE IN MATT MAGNOLIA EMULSION.
AJ — NEW ASH DOORS, SKIRTINGS & ARCHITRAVES AS DWG.JN-SPECR-01[A]
PJ — PAINT EXISTING DOORS, ARCHITRAVES AND SKIRTINGS UNIPERCOAT GLOSS OIL PAINT DOORS DULUX 3010R30B TRIM WHITE.
BF — BARRIER MATTING CORAL BRUSH 5510ANTIRRITE [BONAR FLOOR LTD]
GF — MODULUS GRENADINE [GREEN] CARPET TILES.
TF — MODULUS TANNERON [BURGUNDY] CARPET TILES.
PF — MODULUS PARADIGN CARPET TILES [BLUE] GRADUS ALI NOSINGS WITH BLUEBELL INSERTS.
VF — MARLEY H.D. VYNLSHEET FLOORING CLOUD GREY [MH 203]

PARTITION KEY

BULLET RESISTANT WALL TO BE CONSTRUCTED FROM SW STUD PARTITION FACED ON PUBLIC SIDE WITH PLASTECHNOL PP923 OR TEXTILE BONDING ARMOURTECH SCREENING. OTHER SIDE FACED WITH 12.5mm PLASTERB'D & 5mm NOM SKIM. 75x50 SW REGULARISED STUD PARTITIONING.

NEW STUD PARTITION TO BE CONSTRUCTED FROM 75x50 REGULARISED SW STUDS AT 450 CTS, 100x50 SW SOLE & HEAD PLATES AND HORIZONTAL NOGGINS AT 900 MAX CENTRES TO SUIT PLASTERB'D. FACED BOTH SIDES WITH 12.5mm PLASTERBD AND 5mm NOM SKIM. ALL JOINTS TO BE FILLED AND TAPED, PRIOR TO SKIMMING. MAX HEIGHT THIS CONSTRUCTION=2800

ASH FRAMED 12.8mm LAMINATED GLASS PARTITION TO BE FULL HEIGHT FROM FFL TO U/S SUS/CEILING. CONSTRUCTED TO DETAIL DRAWING No PTN/STD/006

APPROVED

REVISIONS

REV	BY	DATE	
A	BOB	22.01.00	RE-DRAWN TO WORKING DRAWING STATUS.
B	BOB	30.03.00	ACCESS PAST FRONT CSD INC. TO 1200.
C	BOB	30.03.00	SHARED ACCESS ESCAPE RETAINED AS EXISTING. A.C. ADAPTED TO SUIT. DOOR 7 OMITTED. COUNTER CUP'DS REDUCED FROM 3 TO 2. CEILING LAYOUT AMENDED TO SUIT.
D	BOB	04.04.00	ADDITIONAL A.C. NOTES ADDED.

0817 J

ADDITIONAL PLAN APPROVED

D.G. DUDDEN LTD

CLIENT	The Abbey National Group
BRANCH	WOKINGHAM
ADDRESS	26-28 MARKET PLACE WOKINGHAM BERKSHIRE RG11 1AD
PROJECT TITLE	PROPOSED STORE REFIT WORKING DRAWINGS
SCALE	1/50.
DRAWN	BOB
CHECKED	
PROJECT NUMBER	99/2028
DATE	Dec.1999
DRAWING NUMBER	1521/99/01
REVISION	A B C D

DENNICK HOWES, 85 PRINCES ROAD, ELLESMERE, SY12 0AB. Tel: 01691 622541 Fax: 01691 622 542 Email: dgd@dennickhowes.com
WEST MALL, 2000 ANDOVER, BASINGSTOKE OFFICE: BASINGSTOKE HOUSE, BASINGSTOKE ROAD, SPENCERS WOOD, READING, RG7 1NT. Tel: 0118 9883 000

LADIES VANITY UNIT

COUNTER CUP'D ELEVATION

BASEMENT SUSPENDED CEILING



SHOPFRONT ELEVATION

REMOVALS

STRIP OUT GROUND FLOOR GENERALLY TO INCLUDE ALL FITTINGS. SUSPENDED CEILINGS, CARPETS AND WALL COVERINGS. REMOVE ALL COUNTER WORKS AND FIXED JOINERY EXCEPT WINDOW BEDS AND LINNINGS. REMOVE SHOPFRONT WHEN SITE SECURE.

RETAIN ALL EXPOSED TIMBERWORK TO FRONT AREA. RETAIN ABBEY VISION T.V. BRACKET TO FRONT OF BRANCH.

BASEMENT AREA: REMOVE ALL TOILET FITTINGS, CUBICALS & KITCHEN FITTINGS [PHASE TO RETAIN SITE FACILITIES] REMOVE EXISTING WALL COVERINGS, CARPETS AND THERMOPLASTIC FLOOR TILES.

RETAIN EXISTING PARTITIONS, DOORS AND JOINERY.

SUSPENDED CEILING

ARMSTRONG MICROLOOK DUNE PLUS TILES – SIZE– 15x600x600 REF.9111TM05
COLOUR– QUARTZ
TILE RATING–CLASS "0" SURFACE SPREAD OF FLAME TO BS 476.
SUSPENSION SYSTEM–ARMSTRONG TRULOK F5 15mm WIDE EXPOSED GRID. COLOUR– WHITE.
INSTALLATION :
MAIN RUNNERS REF 3000 AWT SPACED AT 1200mm CTS SECURELY FIXED TO, AND FROM, STRUCTURAL SOFFITE, WITH APPROVED HANGERS AT 1200mm MAX CTS. LAST HANGER TO BE WITHIN 450mm FROM ADJACENT WALL FACE.
FLUSH FITTING 1200mm LONG CROSS TEES REF 1200 AWT TO SPAN MAIN RUNNERS AT 600mm CTS AND SUB DIVIDED WITH 600m LONG CROSS TEES AT 600m CTS TO FORM 600x600 MODULE. WHITE PERIMETER TRIM REF 1192441A TO BE SCREWED TO PERIMETER OF WALL AS DRAWING No JN-SPECR-02.
ADDITIONAL HANGERS TO BE FITTED TO ALLOW FOR ANY FITTINGS SUPPORTED BY CEILING, CREATING POINT LOADING, OR DISTRIBUTED LOAD INC.TILES, IN EXCESS OF 6.5Kg/m2.
ALL BULKHEADS SUPPORTED FROM SW FRAMING, SW PERIMETER TRIMS AND TIMBER EXPOSED ABOVE CEILING TO BE PAINTED WITH INTUMESCENT PAINT CLASS "0".

GENERAL LEGEND

- CCTV WALL MOUNTED MONITOR/CONTROLS
- RISING SCREEN CONTROLS
- INTRUDER ALARM KEY PAD
- INTRUDER ALARM CONTROL PANEL
- STILLS CAMERA PANEL
- STILLS CAMERA(WITH DATE/TIME)
- PEEPING DOM CCD
- DT 450 SERIES MOVEMENT DETECTORS.

FIRE ALARM LEGEND

- FIRE ALARM SOUNDER
- FIRE ALARM "BREAK GLASS" CALL POINT.
- SMOKE DETECTOR
- CARBON DIOXIDE EXTINGUISHER
- WATER BASED EXTINGUISHER
- "FIRE EXIT" SIGNS
- GENERAL FIRE NOTICES

ALL FIRE EXTINGUISHERS TO BE FITTED ON WALL BRACKETS IN LOCATIONS INDICATED, AND CLASSIFICATION/USAGE SELF ADHESIVE NOTICE TO BE POSITIONED IMMEDIATELY ABOVE.

ELECTRICAL LEGEND

- FLUSH MOUNTED 1 GANG 13 AMP SWITCHED SOCKET OUTLET.
- FLUSH MOUNTED 2 GANG 13 AMP SWITCHED SOCKET OUTLET (SPECIFIC HEIGHTS NOTED ADJACENT) OTHERWISE NORMAL HEIGHT ABOVE SKIRTING.
- MK 13 AMP 2 GANG SWITCHED SOCKET REF 2747/RED (WALL MOUNTED) MK 13 AMP 2 GANG SWITCHED SOCKET PLATE REF CS3273/RED (FLOOR MOUNTED)
- FLUSH MOUNTED 13 AMP UNSWITCHED FUSED SPUR BY ELECTRICIAN FOR USE BY OTHERS.
- FLUSH MOUNTED 13 AMP SWITCHED FUSED SPUR
- DATA CABLE OUTLET POS WIRING.
- DEDICATED BT LINE
- BT TELEPHONE EXTENSION OUTLET. ELECTRICIAN TO PROVIDE CONDUIT AND BACK BOX FOR BT.
- FAX LINE
- LIGHT SWITCH
- AIR CONDITIONING CONTROL UNIT.

NB . ALL WIRING TO BE CARRIED OUT IN ACCORDANCE WITH THE IEE WIRING REGULATIONS–16th EDITION NO WIRING TO BE STRUNG ACROSS CEILING. ELECTRICIAN TO PROVIDE CABLE TRAYS ETC FOR ALL OTHER SERVICES.

COUNTERS

NEW 2 POSITION RISING SCREEN COUNTER FROM SAFETELL

CONSTRUCT NEW LOW LEVEL CUPBOARDS AT REAR OF COUNTER OF SAFEWAY TYPE BUT HIGHT ADJUSTED TO SUIT AVAILABLE HEAD ROOM. 18MM ASH VEN. DOORS.
NEW RAISED FLOOR TO BE 380mm HIGH AND FORMED USING MEDIUM DUTY COMPUTER FLOORING INCLUDING 2no STEPS UP CONSTRUCTED IN 25mm M.D.F. ON S.W. FRAMING. 190 RISE 250 GOING.
SUPPLY AND FIX 1no QUEUE BARRIER TO MANUFACTURERS INSTRUCTIONS.

WORKTOP

NEW CASH COUNTING WORKTOP IN SECURE AREA TO BE 700mm DEEP AND CONSTRUCTED OF 30mm M.D.F. WITH BULLNOSE FRONT EDGES FINISHED IN GREY LACQUER. SHELVES OVER WORKTOP TO BE CONSTRUCTED SAME, 300mm DEEP AND FITTED ON ADJUSTABLE SPUR BRACKETS @ APPROX 900mm c/c's
HEIGHT CLEARANCE TO UNDERSIDE OF WORKTOP TO BE min 725mm TO ACCOMODATE DISC ARCHIVE CABINET AND FREE STANDING PEDESTAL UNDER.

SAFES

SAFES TO BE LOCATED IN NEW SECURE CUPBOARD SHOWN. CUPBOARD TO BE FITTED WITH
DOUBLE DOORS. SHELVING WITHIN CUPBOARD TO BE AS STANDARD LAYOUT. SAFES TO BE BOLTED DOWN TO 530mm HIGH CONCRETE PLINTH. MAIN SAFE TO BE CHUBB EUROSAFE GRADE IV size 40 FITTED WITH SEISMIC DETECTOR ALARM.
FREE ISSUE 4@ KEY SECURE CABINET AND ASH RAIL WITH 3no CHROMED CUP HOOKS FOR SAFE KEY STEMS.

KITCHEN

SUPPLY AND FIT THE FOLLLOWING KITCHEN UNITS FROM COPPERFIELD INTERIORS Ltd tel 01384 373754
ALL UNITS FROM "CHATSWORTH" KITCHEN UNIT RANGE.

1no STAINLESS STEEL SINK AND TAPS ref S1
1no 1000mm BASE UNITS ref B10
1no 600mm WIDE DRAWER PACK REF. D6/4
1no. CUTLERY TRAY REF. CT6
1no. WASTEMASTER AUTOBIN ref A90
1no 300mm BASE UNIT IF AVAILABLE.
1no 200mm TOWEL UNIT ref TB2
1no Lec NE 142 FRIDGE SUPPLIED BY PURCHASING
1no MERRYCHEF M'WAVE SUPPLIED BY PURCHASING

ALLOW FOR 3000mm FORMICA FIREDUST WORKTOP.

150x150 WHITE GLAZED WALLTILES TO BE PROVIDED TO BACK AND SIDES OF WORKTOP

PROVIDE AND ASSEMBLE 1no 1200mm DIA DINING TABLE FROM COPPERFIED INTERIORS IN REST ROOM.

LIGHTING LEGEND

NB. EMERGENCY LIGHTING TO BE PROVIDED TO ALL AREAS INDICATED TO BS.5266 Pt1 1988

- SURFACE MOUNTED 2D OPAL LUMINAIRE
- 2@ WATT 2D LUMINAIRE WITH 3 HOUR EMERGENCY FACILITY (MAINTAINED)
- EXTRA LOW VOLTAGE TILT AND ROTATE FOR PLANTS AND DISPLAYS INCLUDING 5070 ATM's.
- 13 WATT PLC SMALL DIAMETER DOWNLIGHTER WITH EMERGENCY PACK IF DENNOTED.
- 1200 X 600 3 x 36 WATT TUBE, FLUORESCENT LUMINAIRE WITH WATT ALUMINIUM LOUVRE, TO BE FITTED WITH AN ADDITIONAL EMERGENCY PACK IF DENOTED.
- 600 X 600mm 3 x 18 WATT TUBE, FLUORESCENT WITH WATT ALUMINIUM LOUVRES,TO BE FITTED WITH AN EMERGENCY PACK IF DENOTED.
- TYPE B1 TWIN LAMP FLOURESCENT WALL MONTED UP & DOWN LIGHTER TO BE MOUNTED DIRECTLY ABOVE POSTER FRAME WITH TWO 55W LAMPS
- 2 x 36 WATT SURFACE MOUNTED DOWNLIGHTER WITH WATT ALL LOUVRE TO CAT 2 PERFORMANCE AND WHITE BODY. EMERGENCY PACK IF DENOTED.
- FLUSH WALL MONTED ARROWSLIM OR EQUAL FLUORESCENT LIGHT WITH CURVED CLEAR OPAL DIFFUSER.
- REGGIANI IP 55 HALOHGEN SPOTLIGHT AT HIGH LEVEL ILLUMINATING SHOPFRONT.

CD 4/6/00.