

Beaufort Slabs



SCAN HERE

Natural contoured appearance.

Beaufort Slabs are inspired by the timeless appeal of natural stone. Manufactured with a contoured surface, lightly embossed and finished with a subtle sparkle, Beaufort Slabs are available in natural, muted colours.

- Superb hard-wearing surface
- Natural, muted colour range
- Resembles the aesthetics of natural stone
- Contemporary appearance

 **PrimeTop®**  **Ef-Stop®**



Finish



Pedestrian
Use

Refer to relevant guidance in BS 7533



600 x 400mm



400 x 400mm

Sizes



40mm

Depths



Beaufort Slabs



Specification

 **PrimeTop®**  **Ef-Stop®**

Product type	Concrete Paving Slab
Manufactured to	BS EN 1339:2003
Granite Content	Not less than 60% of granite aggregate in surface layer for Charcoal; Not less than 73% of granite aggregate in surface layer for Natural; Not less than 44% of granite aggregate in surface layer for Buff.
Surface Layer	Hard-wearing surface layer with a minimum of 4mm and >390kgs/m ³ cement
Chamfer	Chamfered
Efflorescence	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence
Bending Strength	Characteristic tensile splitting strength not less than 3.6 MPa
Slip/Skid Resistance	Mean polished skid resistance value (PSRV) >45 Mean unpolished skid resistance value (USRV) >45
Installed to	BS 7533-4:2006
NS	Plus Q25 315 Create 45-20-64/395
Tolerances on Dimensions (mm)	Length ±2mm, width ±2mm, thickness ±3mm
Abrasion Resistance (mm)	≤ 23mm (Wide Wheel Abrasion Test) Class 3
Durability (Freeze-thaw)	≤ 1.0 kg/m ² as a mean with no individual value > 1.5 kg/m ² Class 3
External Fire Performance	Deemed to satisfy when used for roofing
Reaction to fire	Class A1
Applications	Refer to the relevant part of BS 7533 for the correct sub-base design and the most suitable product size for your application. Available from www.bsigroup.com
Energy used	100% renewable energy
Water used	100% from our rainwater harvesting system and groundwater bore hole
Recycled content	Not less than 5%
 Carbon Footprint	EPD Verified (2020) 10.27kgCO ₂ e/m ²
Recyclable	100% of this product can be recycled
Manufacturing & Delivery	From one location within the UK
 rating www.bre.co.uk	A , according to the Green Guide to Specification, 4 th Edition 2009. A+ , can be achieved by using a recycled sub-base.
Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 Quality Management. Manufacturing facilities are accredited to ISO14001:2015 Environmental Management. The company publish environmental labels and declarations in accordance with BES 6001.	


Stock

product	size (mm)	edge	colours available	in stock	no. per m ²	no. per pack	no. per pallet	weight kg per pack GB	weight kg per pack NI/ROI
Beaufort Slabs	400 x 400 x 40	Chamfered	Buff, Charcoal, Natural	YES	6.25	25	100	410	400
	600 x 400 x 40	Chamfered	Charcoal, Natural	YES	4.16	25	100	570	560


Natural



Charcoal

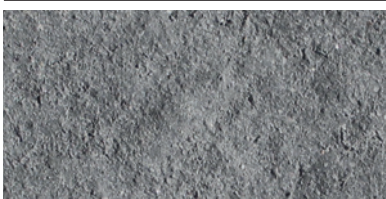

Buff

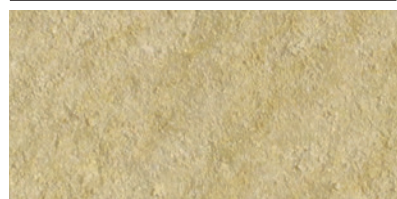

Contact Us

GB: 0844 800 5736
NI: 028 7964 2411
ROI: 048 7964 2411

Email

technical@tobermore.co.uk
sales@tobermore.co.uk

tobermore.co.uk

v1.0