

Apollo Two Tier Cycle Shelter BXMW/AP/TWO-TIER



Standard Unit Dimensions:

Width: 2753mm
Height (Front): 3129mm
Height to (Rear): 2441mm

Length with Capacities:

3600mm (16 Cycles)
4100mm (20 Cycles)
5000mm (24 Cycles)

Colours/Finishes:

	RAL 9006	RAL 7016
Galvanised Only	White Aluminium	Anthracite Grey
Nimbus Grey	Traffic Red	Jet Black
Holly Green	Traffic Yellow	Goose Grey
Mid Blue	Dark Blue	Traffic White
Midnight Blue	Dark Admiralty Grey	Moss Green

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Product Information

The Apollo Two Tier shelter uses the Apollo design while utilising the space saving two tier cycle storage system (sold separately). The popular Apollo design offers a stylish and cost effective solution to covering the Two Tier system.

Features

- Robust Modular Construction Featuring Tubular End Frames
- Heavy-Duty Circular Uprights and Box Section Purlins and Trimmers, Assembled with Anti-Tamper High Strength Bolts
- Anti-Climb End Frames
- Surface Mounted Baseplates
- Hot Dipped Galvanized to BS EN ISO 1461:2022
- 4mm Clear View PETg UV Roof Cladding
- Can contribute towards gaining ENE8 credits when used in the appropriate situation, under the Code for Sustainable Homes.
- BREEAM and Code for Sustainable Homes Compliant.

Materials Used

- Framework - Mild Steel
- Cladding - 4mm PETg UV
- Fasteners - Zinc Plated
- Cover Strips - Pre-galvanized steel flat

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



Apollo Two Tier Cycle Shelter BXMW/AP/TWO-TIER

Finish Options

- Galvanised to BS EN ISO 1461:2022
- Galvanised to BS EN ISO 1461:2022 & Polyester Powder Coated

Weather Resistance

Cladding is UV Stabilised
Wind resistant to 23m/s

Fire Resistance

Cladding is fire tested to EN ISO 11925-2

Guarantees, Warranties, Design-Life and Life-Expectancies

- 25 year structural guarantee*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees* on cladding material(s)
- 10 years' warranty* on material (only)
- 12 months' warranty* on parts & labour

*Maintenance and other qualifying criteria apply

Options

- Steel Profile, Trapezoidal Roof Cladding
- Powder Coating to a wide range of colours
- LED or Solar Lighting
- Multiple Banks to increase Cycle Capacity
- Full Installation Service

Standard Unit Dimensions:

Width: 2753mm
Height (Front): 3129mm
Height to (Rear): 2441mm

Length with Capacities:


3600mm (16 Cycles)
4100mm (20 Cycles)
5000mm (24 Cycles)

Colours/Finishes:

Galvanised Only	RAL 9006 White Aluminium	RAL 7016 Anthracite Grey
BS 4800 10 A 07 Nimbus Grey	RAL 3020 Traffic Red	RAL 9005 Jet Black
BS 4800 14 C 39 Holly Green	RAL 1023 Traffic Yellow	BS 4800 00 A 05 Goose Grey
RAL 5015 Mid Blue	RAL 5013 Dark Blue	RAL 9016 Traffic White
BS 4800 20 C 40 Midnight Blue	BS 4800 18 B 25 Dark Admiralty Grey	RAL 6005 Moss Green


The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Diagram

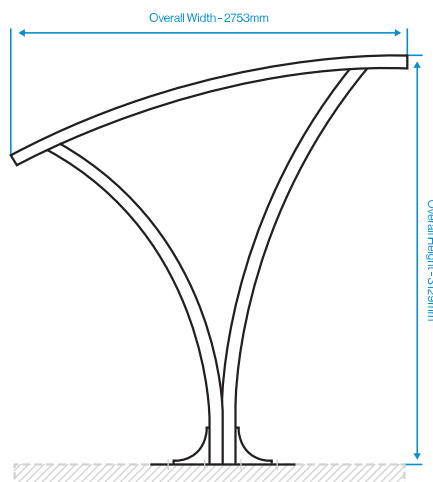

Installation

Surface Mounted Baseplate



Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com

