
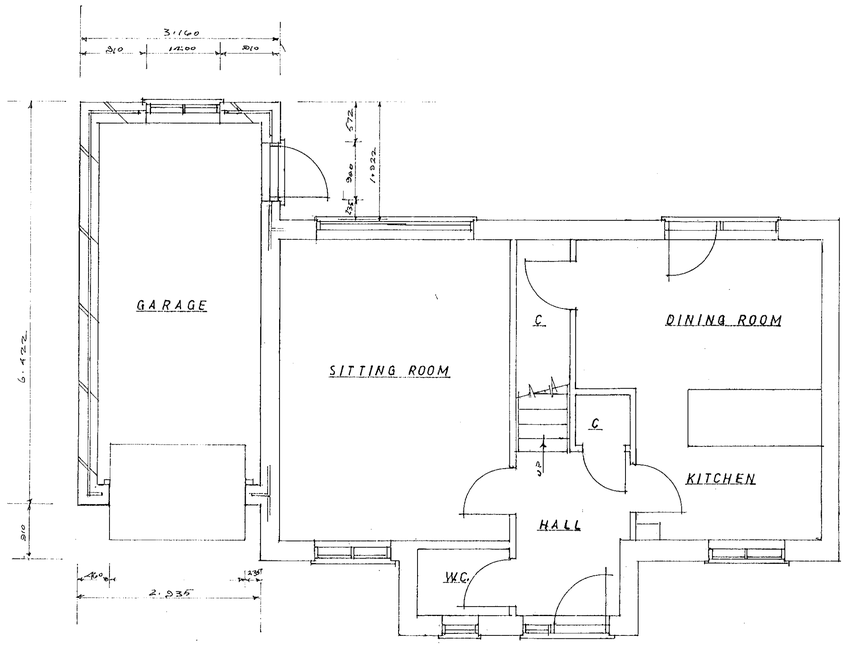


GROUND FLOOR PLAN

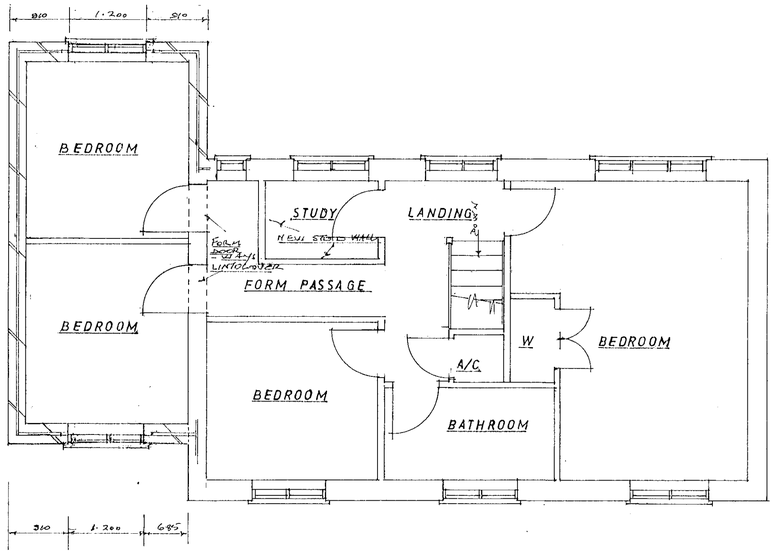


FIRST FLOOR PLAN

Notes WHERE APPLICABLE


1. All dimensions are to be checked on site and not scaled from this drawing.
2. The contractor to visit site prior to commencement of works to check drains, drawing and all dimensions.
3. All dimensions are in millimetres unless otherwise indicated.
4. All work to be carried out to the satisfaction of the Local Authority and to the regulations of the local Gas, Water and Electricity Boards.
5. Work to be executed to all current British Standards and Codes of Practices.
6. All new external finishes to match the existing building in colour and texture.
7. Final selection of joinery components to be agreed with the client.
8. All new finishs to have minimum 150mm end bevking at both ends.
9. All new windows/doors to be a minimum 1/10th of the room floor area with 1/20th openable.
10. Any drains under building to be encased in 150mm concrete and where passing through walls, to be bridged with reinforced concrete lintels.
11. All new branch drains to be 100mm salt glazed, laid to a fall of 1 in 40, with flexible joints, and bed and surround in 150mm pea shingle.
12. All new sanitary fittings to have 75mm deep seal tops with cleaning access provided at bends/joints in waste pipes.
13. All new structural timber to be tanalised or similar pressure treated. Structural timbers to be stress graded (G.S.) in accordance with CP 112, and stress loaded to SC3.
14. Where stud partitions run parallel to floor joists, the joists are to be doubled up to provide support.
15. Surface water to discharge into new soakaways which are a minimum 4600mm from building and to be 1000 x 1000 x 1000mm in dimension and to be filled with clean hardcore and covered with a 75mm layer of concrete.
16. If found necessary the existing foundations are to be underpinned in sections not exceeding 1000mm - minimum width 750mm - and concrete (1:2:4/20) to be left 48 hours before the installation of final pinning mix (1:3) semi-dry which is to be well rammed in. Adjacent sections should not be commenced within 48 hours of final pinning.
17. Wall ties to be provided to each block course adjacent to reveals in cavity walls.

16 GLAZING TO BS 6206

13 JAN 2000 U566

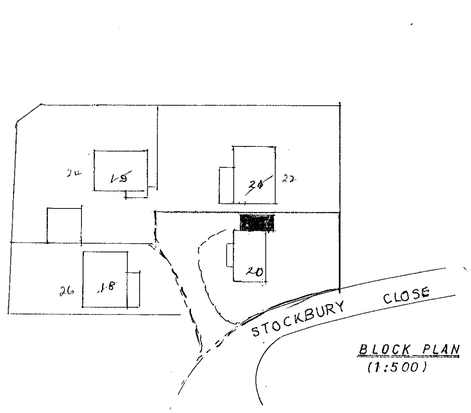

BLOCK PLAN
(1:500)

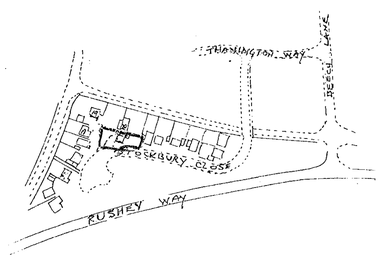

SITE LOCATION PLAN
(1:2500)

SPECIFICATION

Roofs - Roofs pitch as shown on drawings. Plain tiles to match exstg. on 38 x 25mm battens on Bitumen based untearable felt on pre-fabricated trussed rafters at 600mm max. c/cs and to BS 5268 Pt.3: 1985. Calculations to substantiate pre-manufactured trusses will be made available to the Local Authority once an order has been placed with the nominated manufacturer of the roof truss components. . Reinforced roofing, felt underlay to BS 747 laid over rafters and lapped 100mm horizontally, 150mm vertically and carried into the gutters. b/ Cross ventilation of roof void provided by 10mm wide continuous vent gaps formed at the eaves soffits and fitted with upvc trim and fly screen.

Trussed rafters to be secured to gable walls with galv MS straps in accordance with BS 5268 Part 1 & Part 2 and building Regulations Schedule 1 P1A (Approved Document A1/2 Pt C) where shown on the drawings. Provide solid blocking between trusses where strapped.

Structural Timbers - a) grade SC3 b) all structural timbers Tanalised (or similar approved treatment).

Cavity Walls - a) 102mm facing brickwork: 50mm cavity filled with Rockwool insulation batts: 100mm Thermalite inner leaf. b) Galvanised wire wall ties built in at max. 450mm vertical centres. c) All mortar 1:3 (cement:sand) render coat and Sirapite setting coat (12mm overall). CN8 catnic lintels 150mm bearing. Thermobate returns on reveals, cills, lintels.

Damp Proof Courses - a) Pitch polymer dpc's to be used at all openings and cavity closures. b) Horizontal dpc's at the base of walls to be placed min. 150mm above abutting ground surfaces and to be lapped and sealed to all abutting floor damp proof membranes. c) Cavity tray dpc's to be in one piece and to extend 100mm beyond ends of lintels. d) Vertical dpc's at jambs to be one piece lapped behind tray.

Internal Stud Walls - a/ 100 x 50mm softwood studs at 400m centres with solid noggins at max. 1200mm vertical centres and sole and head plate framing. b/ Load bearing walls to incorporate diagonal cross bracing. c/ Voids filled with 100mm compressed glass fibre wool. d/ Walls lined with 9.5mm plasterboard with skim plaster finish.

Foundations - a) 650mm wide trench fill, b) concrete 1:2:4, c) min. depth 1m below ground level but to suit subsoil conditions (to be proved on site). d) Foundation depths to be such that loads are not transferred to drains (all foundations within 1m of drains are to be taken to invert level). e) Wall between foundation and dpc formed in Thermalite Trenchblo-ks (or similar) with outer leaf of facing brickwork to cavity walls. f) Cavity filled to within 150mm of dpc with lean mix.

Ground Floor - a) 50mm cement:sand screed on 150mm 1:2:4- concrete oversite on 1200 gauge polythene dpm (lapped and sealed to wall dpc's) on 25mm sand blinding on 150mm consolidated hard-core or other approved fill. b) Depth of fill not to exceed 600mm. 40mm EPS on polythene.

First Floor 170 x 50mm @ 400 To have 19mm (22mm if spacing of joists greater than 450mm) flooring grade chipboard to BS 5669: 1978 Type II generally. (Type IUII to bathrooms, toilets and kitchens), on timber joists to the grades, (BS 4978) 1973, sizes and spacing shown on the drawings and with herring bone strutting between joists at mid-span where span exceeds 2.5m.

Rainwater Goods - a) 100mm upvc guttering fixed to manufacturers specification with min. 1:200 fall to outlets, b) 64mm upvc down pipes in positions shown on drawings.

Surface Water Drainage - a) All rainwater down pipes connected to underground drainage system as shown on plan. b) Underground drains formed in 110mm dia upvc pipes with flexible joints. c) Full specification for drainlaying and manholes as for foul drains. d) Surface water to discharge into soakaways min 5.m from buildings and constructed in accordance with BRE Digest 151

Thermal Insulation to Roof - a) 150mm thick glass fibre wool laid between ceiling joists. b) Insulation not to obstruct eaves vents. 100 MM QUILTEX AT EAVING AREA OF ROOF


Ceilings located immediately below roofs - a) 9.5mm foil backed plasterboard tacked to joists. b) Joists scrimmed. c) 5mm skim plaster finish.


Flashings - a) All abutments of the roof slopes with walls weathered with Code 4 lead flashings. b) Lead dressed 100 mm over tiles. c) Lead soakers fitted one to each tile course on sloping abutments. d) Top edge of flashings recessed into mortar joints min. 150mm above roof level and secured with lead wedges and mortar.


Opening Window Lights/Ventilation - a) All rooms to have opening lights at least 1/20 of floor area. b) Some part of the opening to be at least 1.75mm above floor level. Fit trickle vents. Free opening MIN OPENING

Electrical installation


The electrical installation is to be to WIRSC standards and Institute of Electrical Engineers Regulations for the Electrical Equipment of Buildings (latest edition).

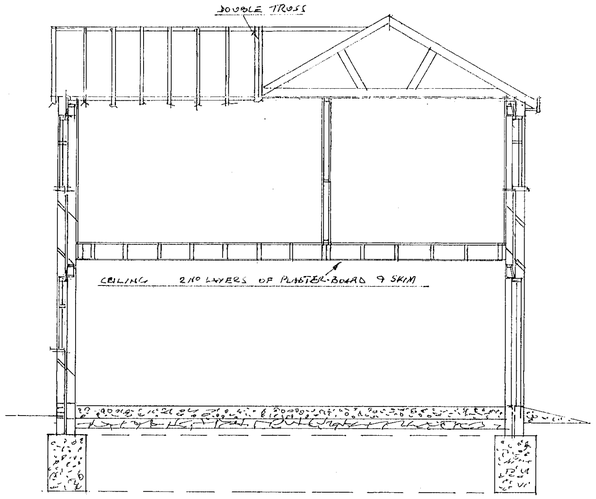




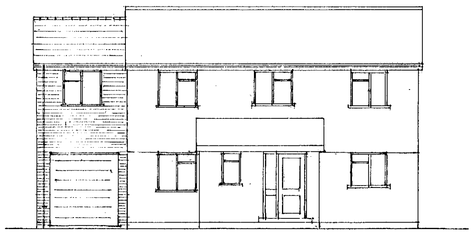


FRONT ELEVATION

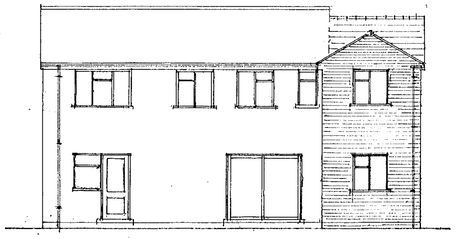


REAR ELEVATION



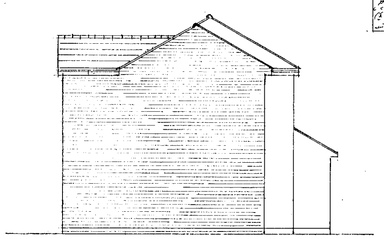

SIDE ELEVATIONS



PLAN No	REVISIONS		DATE	SCALES
N.S.3s.		PROPOSED EXTENSION AT 20 STOCKBURY CLOSE, LOWER EARLEY, BERKSHIRE. FOR MR & MRS. C. COX.	16-10-99	PLANS 1:50 SECTION 1:50 ELEVATIONS 1:100

16/6/00