

Coventry: 02476 511266

Maidstone: 01622 813400





W: www.keller-uk.com

PMx22 - DRIVEN PILING RIG


Technical Data:

- Used for Driven Precast Concrete Piling
- Used to install 220 and 250mm square piles as standard.
Other section sizes available by special order.
- Single lengths up to 14m.

Cab Dimensions:

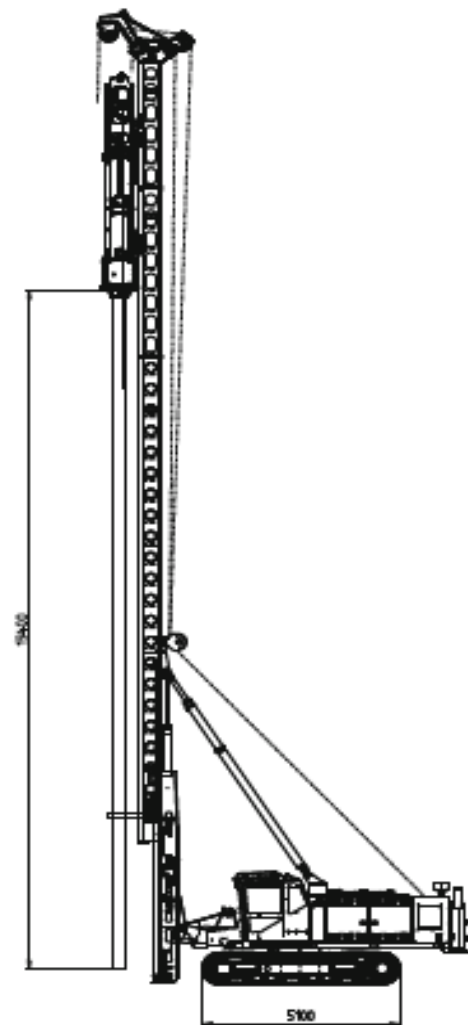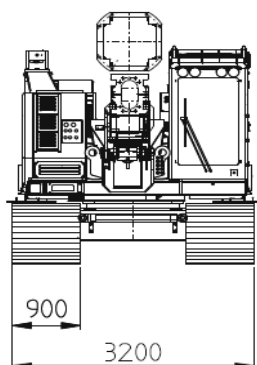

Dimensions in Transit:

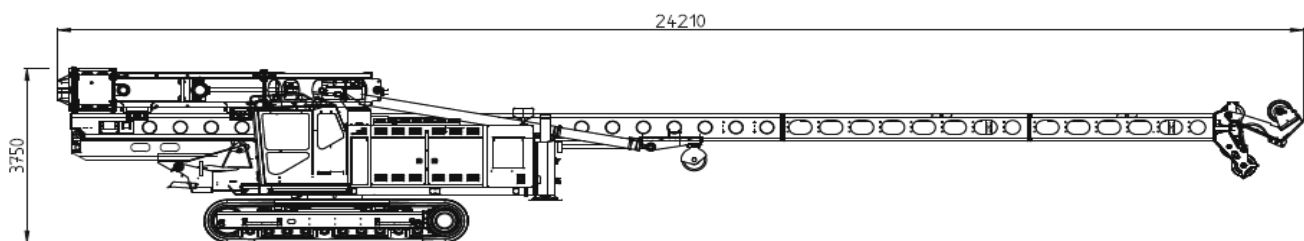

Working Platform - Maximum Loadings for Pile Mat Design

Pressure Summary for Platform Design (unfactored)				
MODE	BRE LOAD CASE (1 or 2)	Length (m)	Width (m)	UDL Pressure (kPa)
Standing	1	2.42	0.9	174
Travelling	1	2.42	0.9	174
Handling	1	2.05	0.9	225
Penetrating	2	1.23	0.9	225