

Health & Safety Information Key:



H&S- INFO



H&S- PREVENT



H&S- WARN



H&S- ACTION

NOTES:

- All dimensions are in mm.
- If limiting dimensions are exceeded or if ground is poor refer to the Engineer.
- The sheeting is assumed to be Non-Permeable.
- Assumed Ground Bearing Capacity of 75kN/m².

GENERAL NOTES


NO DIMENSIONS TO BE SCALED OFF THIS DRAWING.

THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL RELEVANT ARCHITECT'S AND ENGINEER'S DRAWINGS.

ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.

ALL LEVELS ARE IN METRES UNLESS NOTED OTHERWISE.

ANY DISCREPANCIES NOTED ON SITE ARE TO BE REPORTED TO THE ENGINEER IMMEDIATELY.

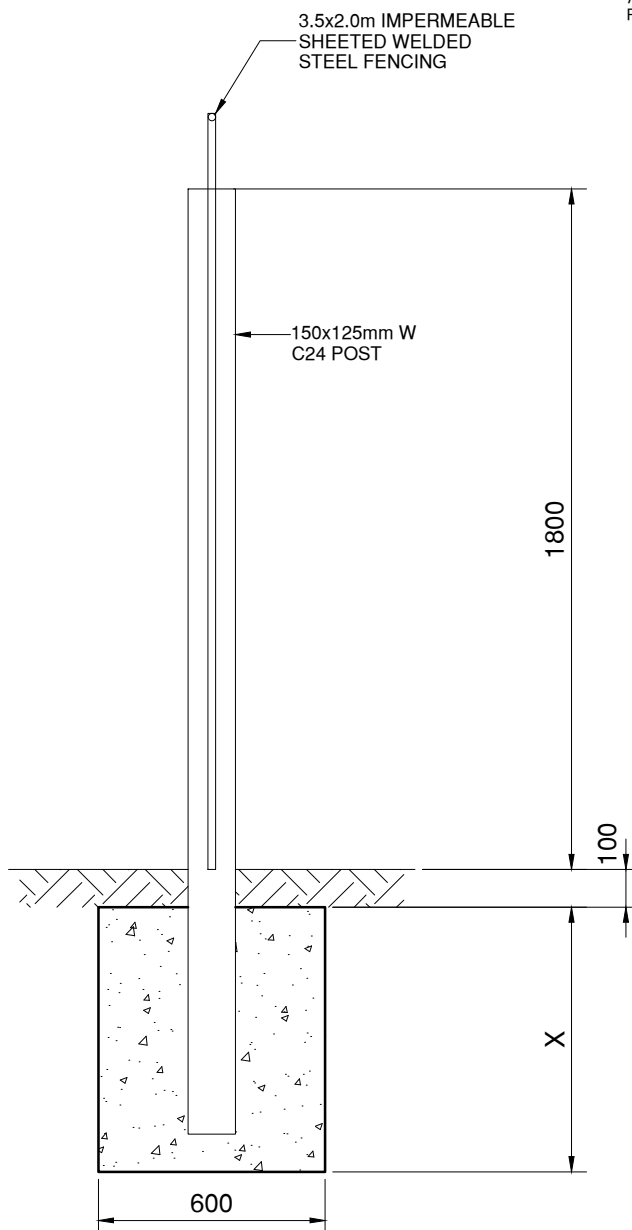

"X" (m)		Design life of temporary structure (years)			
		2	4	6	8 - 10
WIND ZONE	A	0.55	0.60	0.65	0.70
	B	0.60	0.65	0.70	0.75
	C	0.65	0.70	0.70	0.75
	D	0.70	0.75	0.75	0.80

Client

VISTRY GROUP

Project

Status

CONSTRUCTION

01 23.10.20 GBP note updated. C.T. K.T.
Rev. Date Amendments By Chk. by
Drawing Title

STEEL FENCING - IMPERMEABLE
SHEETED WELDED STEEL FENCING

Scale Drawn Checked Date
A4 @ 1:20 R.H. C.T. MAR' 20

Project No. Drawing No. Rev.

GROUP-VIS-S-TW-D2-S-FC-1013 01



File Path: