

South Wokingham Distributor Road
Landscape Specification



Landscape Specification

South Wokingham Distributor Road,
Wokingham,
RG40 2HP

South Wokingham Distributor Road
Tony Gee and Partners LLP



May 2025

Office Locations

Cambridge

1A Clifton Court, Clifton Road,
Cambridge, CB1 7BN
01223 776740

London

Moor Place, 1 Fore Street Avenue,
London, EC2Y 9DT
020 3011 0820

Norwich

Brettingham House, 98 Pottergate,
Norwich, NR2 1EQ
01603 631319

Bath

Newark Works, 2 Foundry Way,
South Quays, Bath,
BA2 3DZ
01225 690119

Manchester

One St Peter's Square,
Manchester,
M2 3DE
01617 111740

Edinburgh

1 Lochrin Square,
92-98 Fountainbridge,
Edinburgh, EH3 9QA
01316 000319

York

Stanley Harrison House, The Chocolate Works,
Bishopthorpe Road,
York, YO23 1DE
01904 803800

Issue Sheet

Document Prepared for: Tony Gee & Partners LLP

Landscape Specification, Implementation & Management Plan

Prepared by:

Name: Barbara Jedrzejczyk

Title: Senior Landscape Architect

Date: December 2024

Name: Ben Wagstaffe

Title: Biodiversity Architect

Date: December 2024

Approved by:

Name: James Carey CMLI

Title: Associate Director of Landscape Architecture

Date: January 2025

Name: Rebecca Little

Title: Associate Director of Ecology

Date: January 2025

Revision: V3.0

Contents

1	INTRODUCTION	1
1.1	SUMMARY	1
1.2	DOCUMENT FORMAT	3
1.3	RELEVANT GUIDANCE	3
2	DESCRIPTION OF WORKS	5
3	PLANTING AND SEEDING	8
3.1	INTRODUCTION	8
3.2	PLANTING AND SEEDING LOCATIONS	8
3.3	RESTRICTIONS ON PLANTING	8
4	PLANTING AND SEEDING PREPARATION	9
4.1	CLEARANCE	9
4.2	HERBICIDE APPLICATION	9
4.3	CULTIVATION	10
5	PLANTING	11
5.1	PLANT HANDLING	11
5.2	PLANT STAKING AND PROTECTION	12
5.3	MULCHING	13
5.4	STREET TREE PLANTING	14
5.5	GREEN SPACE (INDIVIDUAL) TREE PLANTING	14
5.6	HEDGEROW TREE PLANTING	15
5.7	WOODLAND MIX	15
5.8	WET WOODLAND MIX	16
5.9	LOW WOODLAND EDGE MIX	17
5.10	NATIVE SHRUB MIX	17
5.11	HEDGEROW MIX	18
5.12	HERBACEOUS RIPARIAN MIX	19
5.13	LOW NATIVE SHRUB MIX	20
5.14	LOW WET SHRUB MIX	21
6	SEEDING	22
6.1	INTRODUCTION	22
6.2	FLOWERING LAWN SEEDING	22
6.3	WILDFLOWER MEADOW SEEDING	23
6.4	SHADE TOLERANT WILDFLOWER SEEDING	24
6.5	WETLAND MEADOW SEEDING	26
6.6	WETLAND MEADOW SEEDING TYPE 2 (EM8+)	27

6.7	EMERGENT MACROPHYTE WETLAND MEADOW	29
7	AFTERCARE	30
7.1	INTRODUCTION	30
7.2	GENERAL	30
7.3	WATERING	30
7.4	PRUNING	30
7.5	WEED CONTROL	31
7.6	STAKES AND PROTECTIVE GUARDS	31
7.7	MULCH	31
7.8	PLANT FAILURES	31
7.9	MOWING – AMENITY GRASS	32
7.10	MOWING – WILDFLOWER SEEDING	32
7.11	MOWING – WETLAND / POND MEADOW SEEDING	32
8	IMPLEMENTATION TIMEFRAMES	33
9	APPENDICES	34

Appendices

APPENDIX 1 WMHP-TG-SRWG1-DR-LS-3001-3009 ‘SOFT LANDSCAPING PLANTING PLAN’

APPENDIX 2 WMHP-TG-SRWG1-DR-LA-3021-3026

1 Introduction

1.1 Summary

1.1.1 Lanpro Services Ltd. ('Lanpro') was commissioned by Tony Gee to prepare an update to the written landscape specification, to support the discharge of Condition 12, Part e) of planning approval notice 192928 and to provide the detailed specification for all soft planting operations set out in drawings WMHP-TG-SRWG1-DR-LS-3001 - 3009 'Soft Landscaping Planting Plan' (See Appendix 1) for the Wokingham Spine Road and Western Gateway Phase 1, herein referred to as 'the Development'.

1.1.2 The requirements of condition 12 of the Decision Notice is detailed as follows:

*Prior to the first occupation of any phase of the development a detailed landscaping scheme for the whole of the site shall be submitted to and agreed in writing with the Local Planning Authority. The landscaping scheme shall include the following information:
Condition 12 states the following:*

- i. *No development other than enabling works as established by the details approved pursuant to condition 3 shall take place in any phase of the development until full details of both hard and soft landscape works for that phase have been submitted to and approved in writing by the local planning authority and these works shall be carried out as approved. The details shall include, as appropriate:*
 - a) *scheme drawings;*
 - b) *proposed levels and contours;*
 - c) *detailed design of SuDS features in accordance with the SuDS Strategy, demonstrating how they will be integrated into the wider landscape, with attenuation basins having a natural shape and shallow profile (not requiring lifesaving equipment and fence barriers), allowing them to fulfil amenity, ecological and drainage functions;*
 - d) *soft landscaping details including planting plans, schedules of plants, noting species, planting sizes and proposed numbers/densities where appropriate;*
 - e) *a Landscape Specification document covering soft landscaping (including site preparation, cultivation, plant handling and other operations associated with plant and grass establishment) and hard landscaping including all construction works such as paths, bridges, retaining walls and road restraint systems;*
 - f) *details of the street tree planting pits in combination with the roadside swales/raingardens demonstrating that the trees have sufficient rooting volume to enable their successful retention long term health;*
 - g) *hard landscaping materials including samples;*
 - h) *minor artefacts and structures (e.g. bus stops, street furniture, refuse or other storage units, signs, external services) including specifications for the product and its installation;*

- i) *consideration of how the landscape proposals for the SWDR integrate with those for the surrounding development to ensure comprehensively planned and coordinated landscape design and delivery;*
- j) *consideration of the route for a future Public Right of Way along the route of the Emmbrook between the SWDR bridge and Finchampstead Road;*
- k) *consideration of incorporation of seating at regular intervals along the route to allow pedestrians to rest and facilitate social interaction;*
- l) *specification for tree rooting systems and use of structural soils under paving or where rooting volumes are limited;*
- m) *all boundary treatments, including temporary highway boundary fences, and other means of enclosure or controlling access such as gates, bollards and vehicle restraint systems, which shall include consideration of ecological permeability, in particular containment of otters and dogs to prevent them straying onto the road;*
- n) *measures required for ecological mitigation and biodiversity net gain;*
- o) *measures for management of the Emm Brook corridor;*
- p) *visual screening between the road and the Grade II listed buildings, Britton's Farmhouse and the adjacent barn;*
- q) *demonstration that the layout that is consistent with and does not prejudice the proposed use of the land as a SANG (under application 191068 or any application that supersedes it);*
- r) *a minimum eight metre wildlife zone to watercourses measured from the top of the bank, with the exception of the areas identified within sections 2.3.4 and 2.3.5 of the WFD assessment (February 2021) within which all planting shall be native species of local provenance;*
- s) *how non-native species such as Himalayan Balsam will be eradicated;*
- t) *how the buffer zone will be protected during development and managed over the long term; and*
- u) *how the river channel morphology and bankside habitat will be enhanced to contribute to biodiversity net gain.*
- ii. *Details of quality control measures, including supervision of landscape contract(s) by a suitably qualified landscape specialist and annual landscape audits for the five-year period from completion of the landscaping for the Landscape Phase or until adoption (whichever is longer). The annual Landscape Audit shall be submitted to the Local Planning Authority for information prior to the next planting season and replacement planting undertaken in accordance with the landscape audit and iii) below.*
- iii. *Any trees or plants which, within a period of five years after planting, are removed, die or become seriously damaged or defective, shall be replaced in the next planting season with others of species, size and number as originally approved and permanently retained.*

Reason: In the interests of visual amenity, to secure necessary ecological mitigation and biodiversity gain, and to safeguard the setting of designated heritage assets in

accordance with Core Strategy policies CP1, CP3, CP7 & CP21; and Managing Development Delivery Local Plan policies CC03, TB21 TB23, & TB24; and the South Wokingham SDL SPD. Details are required prior to commencement to ensure a coordinated and comprehensive approach to landscaping which is fundamental to the acceptability of proposal.

- 1.1.3 This document will be adhered to by the Project's personnel, Principal Contractor and sub-contractors involved with construction activities carried out in relation to the Development.
- 1.1.4 The approved version of this Written Landscaping Scheme will be adopted and implemented by the Projects' personnel, the appointed Principal Contractor and all sub-contractors for the Development works. Minor changes may be made to this document by the Principal Contractor during construction phase. However, changes of a material nature will be agreed with the Wokingham Borough Council and stakeholders as relevant.

1.2 Document Format

- 1.2.1 The document is structured into the following parts:
- Section 1; is the introduction that sets out planning basis of this document alongside all relevant guidance and standards.
 - Section 2; sets out the description of works.
 - Section 3; provides a summary of all planting and seeding works;
 - Section 4; sets out prescriptions for the planting preparations and care.
 - Section 5; sets out the planting methods and specification of all planting across site.
 - Section 6; sets out the seeding methods and specification of all planting across site.
 - Section 7; sets out the landscape aftercare prescriptions;
 - Section 8; sets out the implementation timeframes.
- 1.2.2 The document is also supported by the following appendices in Section 9:
- Appendix 1: WMHP-TG-SRWG1-DR-LS-3001 - 3009 'Soft Landscaping Planting Plan'
 - Appendix 2: WMHP-TG-SRWG1-DR-LA-3021-3026

1.3 Relevant Guidance

- 1.3.1 This LEMP has been produced with reference to the following guidance:
- Institute of Environmental Management and Assessment; and
 - National Plant Specification 'Handling and Establishing Landscape Plants'.


1.3.2 All plants and planting operations are to comply with the requirements and recommendations of all current relevant British Standard specifications including but not limited to:

- BS 8545. Trees: From Nursery to Independence in the Landscape;
- BS 3936-1:1992. Nursery stock. Specification for trees and shrubs;
- BS 3882:2015 - Specification for topsoil;
- BS 4428:1989. Code of practice for general landscape operations (excluding hard surfaces) (AMD 6784);
- BS 5837: 2012 Trees in relation to design, demolition and construction. Recommendations;
- BS3998:2010 Recommendations for Tree Work;
- The Hedgerow Regulations 1997;
- Local Authority Guidance; and
- Bumblebee Conservation Trust
- National Grid Guidance: Design Guidelines for Development Near High Voltage Overhead Lines
- Scottish & Southern Electricity Networks: Guidance for Third Parties Working Near SSEN Transmission Assets

2 Description of Works

- 2.1.1 In order to realise the vision for the development, and mitigate traffic impacts from the development sites, a series of transport and infrastructure initiatives are being progressed including the provision of a number of major highway projects.
- 2.1.2 The South Wokingham Distributor Road (SWDR) will provide access to a development of up to 1800 new homes, and provide key transport link for this new community, including safe, accessible cycling and walking provision to reduce the need for driving. It will also offer an alternative route for through traffic that avoids Wokingham town centre.
- 2.1.3 The new distributor road is proposed to extend in an easterly direction from Finchampstead Road, along the southern side of the Reading to Waterloo Line, to London Road, as illustrated in Figure 1 below.


Figure 1: indicative alignment of the South Wokingham Distributor Road

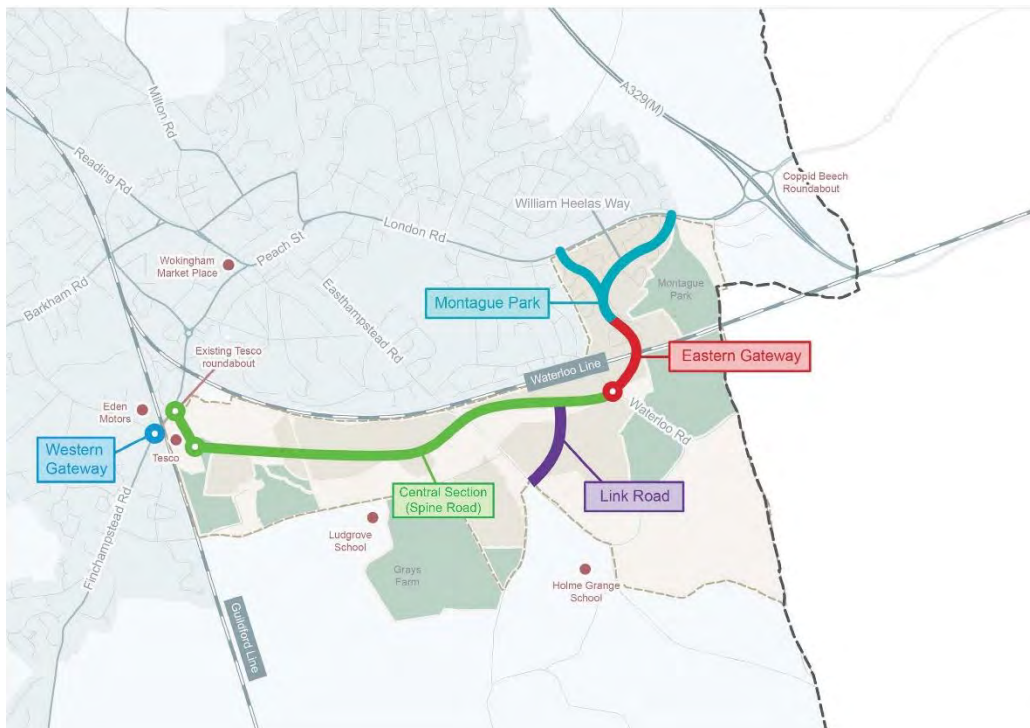

- 2.1.4 The SWDR must take into consideration the South Wokingham SDL proposed development as shown on plans P18-0963_06U-01 and P18-2684_31 which can be found in WBC Project Works Information WMHP-WBC-SRWG1-RP-PM-0001; as well as planning applications that have been submitted in lieu of South Wokingham SDL. These include but are not limited to:
- Planning Application refs: 190900, 190914 and 101068 by the South Wokingham SDL Consortium.
 - Planning Application ref: 192325 by Persimmon Homes.

- 2.1.5 The first phase of the Distributor Road, which extends from London Road into the Montague Park Development, has previously been constructed by David Wilson Homes. Planning for the second phase crossing the rail line and linking Montague Park to Waterloo Road, Eastern Gateway, was granted in April 2018, with construction completed, and the scheme completed and opened in early 2022.
- 2.1.6 A planning application for the third phase of the South Wokingham Distributor Road, referred to as the SRWG1 (Central Section), was submitted in November 2019, revised on December 2020, with consent granted in May 2021.
- 2.1.7 SRWG1 will tie in with the south-westerly arm of the Eastern Gateway roundabout and extend west through agricultural land roughly parallel to the rail line, across a new junction with Easthampstead Road, crossing the Emm Brook and linking up with Finchampstead Road at the Finchampstead Road/ Tesco Roundabout. The final phase, Western Gateway Phase 2, comprises of a roundabout enhancement at the junction of Finchampstead Road and Molly Millars Lane.
- 2.1.8 The proposed highway alignment is mainly offline and constructed on an embankment with some at grade sections. There is some online work with the creation of a junction at Easthampstead Road, and at the scheme tie-ins. The scheme incorporates a new bridge to provide vehicular and pedestrian/cyclist access across Emm Brook with an offline foot/cycle bridge crossing Emm Brook to the south of the distributor road.
- 2.1.9 One new roundabout, the New Tesco Access/ SWDR Roundabout, is included at the far west of the scheme providing access to the Tesco car park and linking the scheme to the Finchampstead Road/ Tesco roundabout. The existing Finchampstead Road/ Tesco Roundabout is also being modified to provide a new arm to connect the SWDR.
- 2.1.10 Detailed design drawings are listed in Appendix 1.

Figure 2: Plan illustrating SRWG1 highways works

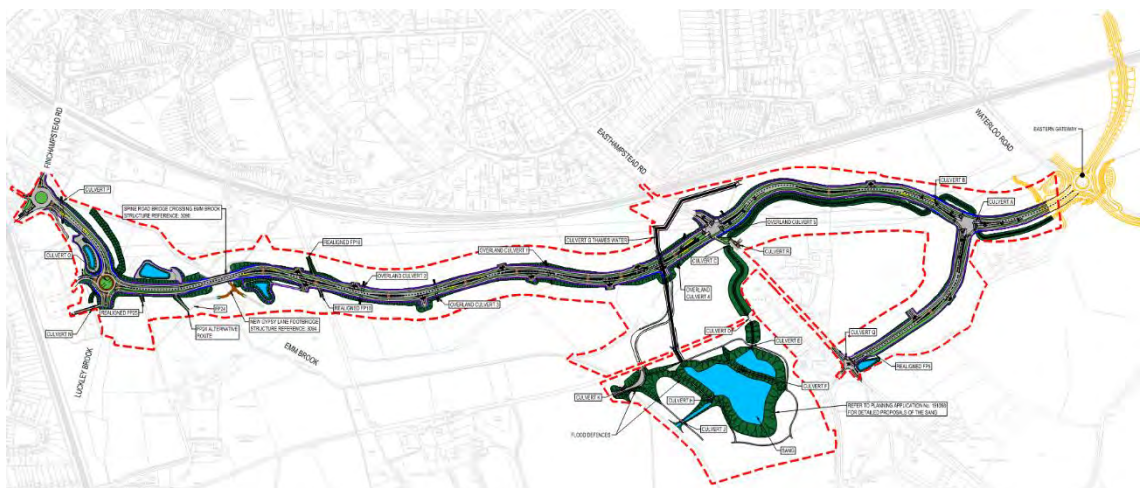

2.1.11 The highway works for SRWG1 include, but are not limited to, the following;

- Site clearance over the footprint of the new highway and as indicated on the illustrative drawings
- Link road between Eastern Gateway and New Tesco Access/ SWDR Roundabout
- The New Tesco Access/ SWDR Roundabout
- Road bridge crossing Emm Brook
- Footbridge crossing Emm Brook
- Drainage network to collect and attenuate surface water from the highway
- Culverts to enable watercourses and overland drainage to pass under SRWG1
- Pedestrian / cycle facilities
- Bus Stop facilities
- Traffic signs, road markings, traffic signals, lighting and road restraint systems
- Traffic Signals
- Landscaping and Ecology
- Ancillary Works
- SANG earthworks and drainage
- Thames Water culverts

3 Planting and Seeding

3.1 Introduction

- 3.1.1 The landscape proposals consist of native tree, shrub, hedgerow, woodland, herbaceous riparian planting and native wildflower grassland mixes with both species and forms seen locally to the site to complement the wider landscape and increase biodiversity on site.
- 3.1.2 All landscape operations will be in-line with the relevant British Standard listed in Section 1.3 of this report.
- 3.1.3 All planting and seeding operations will be conducted under supervision of a suitably qualified landscape architect or competent landscape professional

3.2 Planting and Seeding Locations

- 3.2.1 The location of all proposed planting and seeding areas are illustrated in drawings WMHP-TG-SRWG1-DR-LS-3001 - 3009 'Soft Landscaping Planting Plan' and provided in Appendix 1.

3.3 Restrictions on Planting

- 3.3.1 Proposed planting may be restricted due to the presence of existing and proposed below and above ground services. Where services are present a reasonable safe distance for landscape contractors when undertaking planting works must be adhered to.
- 3.3.2 The Principal Contractor is responsible for accurately identifying all information in relation to existing services on site. This includes the accurate location of existing services and identification and agreement of associated easements required by each asset owner and will be shared with the landscape contractor prior to the commencement of landscape works.

4 Planting and Seeding Preparation

4.1 Clearance

4.1.1 Where required, the Site will be cleared prior to any planting operations being undertaken.

4.1.2 Where existing ground vegetation is retained or has re-established during the construction phase, the following clearance works should be undertaken prior to any planting or seeding works:

- **Tree Planting (including Street Tree and Green Space Tree Planting):** All grass and perennial vegetation within a 500mm radius of the base of each proposed tree should be cleared to ground level including all epicormic and below ground growth;
- **Hedgerow Planting (including Hedgerow Tree Planting):** All grass and perennial vegetation within a 500mm offset each side of the proposed centre line and within a 250mm radius of each proposed tree should be cleared to ground level including all epicormic and below ground growth;
- **Woodland Planting (including Wet Woodland Planting):** All grass and perennial vegetation within a 250mm radius of the base of each proposed tree should be cleared to ground level including all epicormic and below ground growth;
- **Native Shrub Planting (Including Woodland Edge Planting, Low Native Shrub Mix, Low Wet Shrub Mix):** All grass and perennial vegetation within a 250mm radius of the base of each proposed tree should be cleared to ground level including all epicormic and below ground growth;
- **Riparian Mix Planting:** All grass and perennial vegetation should be cut to 25-50mm across each planting area;
- **All Wildflower and Grassland Seeding:** All grass and perennial vegetation should be cleared to ground level including epicormic and below ground growth;
- **All Areas:** Clear all rubbish and debris and stone pick all stones over 25mm diameter; and
- **Arisings:** Removed from site.

4.2 Herbicide Application

4.2.1 There is a general presumption against the use of herbicides, pesticides and fertilisers due to the detrimental impact they can have on the environment. These should be restricted to essential tasks when other management methods are not feasible.

4.2.2 Where persistent weeds exist that would be detrimental to the establishment of the proposed planting and when other hand/machine weed control methods have not been successful, the area should be treated with two applications of selective broadleaf

herbicide prior to planting and seeding. Where necessary, care should be taken to avoid existing bulb and wildflowers and strictly in accordance with the Control of Pesticides Regulations 1986 (COPR) (as amended 1997) (or, otherwise, updated/superseded legislation) and following manufacturer's instructions by qualified staff.

4.3 Cultivation

- 4.3.1 Topsoil should be cultivated in-line with BS 3882: 2015 to a minimum of 400mm over all planting areas and to a fine tilth over all areas to be seeded and include basic levelling with levels graded to fall.
- 4.3.2 No additional / imported top soil is required for species rich grassland / meadow areas.
- 4.3.3 No cultivation should take place in wet/ waterlogged conditions and within the root protection areas of existing trees. Where necessary imported topsoil should be sustainably sourced and must be compliant with the BS 3882: 2015.

5 Planting

5.1 Plant Handling

- 5.1.1 The handling of plants and planting operations should be in accordance with the requirements and recommendations set out in the relevant British Standards outlined in section 1.3 of this report. The supplier of any plant material to site should be listed in the Horticultural Trade Associations, Nursery Certificate Scheme.
- 5.1.2 All planting should be carried out during appropriate weather conditions and where possible during the optimal planting period of October through until the end of March.
- 5.1.3 Care should be taken to ensure the roots of bareroot specified trees and shrubs do not dry out prior to planting and should be planted as soon as possible after delivery. If this is not possible then rootballed and container grown plants should be specified and stored closed together with the ball or container covered with sand or a moist cloth to prevent drying out. Plant / Tree Handling, Storage and Transport to be carried out to CPSE 'Handling and establishing landscape plants' (obtainable from the Horticultural Trades Association) Part I, Part II and Part III, paragraphs 1.3.3 to 1.3.6, 3.0, and 4.0.
- 5.1.4 Planting work to be carried out to CPSE 'Handling and establishing landscape plants' (obtainable from the Horticultural Trades Association) Part III, paragraphs 6.2 to 6.6. Plant upright or well balanced with best side to front. Plants to be handled and dispatched in accordance with the National Plant Specification - Handling and establishment, with special reference to the following:
- Frost: Protect bare root plants and frost susceptible plants;
 - Handling: Handle plants with care. Protect from mechanical damage and do not subject to shock, e.g. by dropping from a vehicle;
 - Plant packaging: Bare root material to be sealed in co-extruded black and white polyethylene bags;
 - Planting: Upright or well balanced with best side to front;
 - If plants suffer slight damage, they are to be carefully pruned. If major damage has occurred the plant shall be rejected and replaced at the Contractor's expense;
 - After delivery, if planting is not carried out immediately, root balled shrubs should be placed cheek to cheek and the root ball covered with sand, peat or straw and watered to prevent drying out;
 - Bare-rooted plants should be heeled-in by pacing the roots in a prepared trench and covering them with top-soil, which should be watered thoroughly to eliminate air pockets around the roots; and
 - The security and tidiness of the area set aside for heeling in shall be the responsibility of the Contractor. If planting is delayed for more than a week after

delivery, packaged plants shall be unpacked, the bundles opened up and each groups of plants heeled-in separately and clearly labelled.

5.2 Plant Staking and Protection

- 5.2.1 It is recommended that all staking and protection measure consist of biodegradable products where possible.
- 5.2.2 Should any non-biodegradable products be used, it is essential that these are removed in a timely manner following establishment and in-line with the landscape management plan.
- 5.2.3 All removed accessories should be disposed of responsibly.

All stakes, canes and other supports should be positioned on the windward side of the tree or shrub and driven in to the ground vertically.

Semi Mature Trees

- 5.2.4 New semi mature trees are to be planted and staked in line with Tree Pit Construction Details Drawing WMHP-TG-SRWG1-LS-3010 (latest revision).
- 5.2.5 All semi mature trees to be planted in pits 900 x 900 x 700 mm or dimensions of rootball, whichever is greater (for tree pit details refer to Tree Pit Construction Details Drawing WMHP-TG-SRWG1-LS-3010 latest revision).
- 5.2.6 Trees are to be supported by GreenBlue Urban ArborGuy Deadman Guying System.
- 5.2.7 1 no. 25kg bag of soil improver and the root balls to be given a mycorrhizal treatment immediately before planting.
- 5.2.8 Trees to be planted centrally within the tree pit. Semi-mature trees to have minimum 2.4m clear stem.

Standard Trees

- 5.2.9 All standard trees to be planted in pits 600 x 600 x 500 mm or dimensions of rootball, whichever is greater (for tree pit details refer to Tree Pit Construction Details Drawing WMHP-TG-SRWG1-LS-3010 latest revision).
- 5.2.10 Tree to be supported by two wooden stakes, 600mm above ground with two adjustable ties.
- 5.2.11 1 no. 25kg bag of soil improver and mycorrhizal treatment to be incorporated into the soil of all new tree pits immediately before planting.
- 5.2.12 Trees to be planted centrally within the tree pit.

Light Standard Trees

- 5.2.13 All light standard trees to be planted in pits 500 x 500 x 400 mm or dimensions of rootball, whichever is greater.

- 5.2.14 Tree to be supported by a single stake and suitable biodegradable tie.
- 5.2.15 1 no. 25kg bag of soil improver and the root balls to be given a mycorrhizal treatment immediately before planting.
- 5.2.16 Trees to be planted centrally within the tree pit.

Feathered Trees

- 5.2.17 All feathered trees to be planted in pits 300 x 300 x 450 mm or dimension of the rooting area which ever is greater.
- 5.2.18 Trees to be planted centrally within the tree pit and supported using a suitable cane/stake and biodegradable tie and rubber buffer to prevent excessive movement during establishment.
- 5.2.19 Feathered trees should be protected from animal damage using a suitable tree guard appropriate to the size. Guards should be biodegradable and pushed up to 2 cm into the ground.
- 5.2.20 Soil improver and mycorrhizal treatment to be incorporated into the soil of all new tree pits before planting.

Whips and Transplants

- 5.2.21 All other planting within hedgerows should be staked in-line with BS 4428: 1989 using a single and appropriate biodegradable tie to prevent excessive movement during establishment.
- 5.2.22 All stakes, canes and other supports should be positioned on the windward side of the tree or shrub and driven in to the ground vertically.
- 5.2.23 All newly planted plants should be protected from animal damage using a suitable shrub guard appropriate to the size. Guards should be biodegradable and pushed up to 2 cm into the ground.
- 5.2.24 A spiral guard should be used for whips and transplants within hedgerow and shrub plants, and shrub shelters for tree and shrub species with a bushy formation to allow room for growth, and mesh construction to allow wind through for successful trunk / stem establishment.

5.3 Mulching

- 5.3.1 All new tree and shrub planting should be covered using a coarse bark mulch to a minimum depth of 100mm leaving the stem of the plant clear.
- 5.3.2 The following mulch areas should be applied:
 - **Hedgerow Planting (including trees):** minimum mulch area of 500mm offset from the centreline of the proposed hedge;

- Woodland Planting (including Wet Woodland Planting): **minimum mulch area of 250mm** radius from stem;
- **Native Shrub Planting (including Woodland Edge Planting, Low Native Shrub Mix, Low Wet Shrub Mix):** minimum mulch area of 250mm radius from stem; and
- **Street Trees:** minimum mulch area of 500mm radius from stem.
- **Green Space (Individual) Trees:** minimum mulch area of 500mm radius from stem.

5.4 Street Tree Planting

5.4.1 Table 1.1 provides a species list and specification for all proposed street tree planting associated with the Development works. Locations of all proposed street trees are shown on drawings WMHP-TG-SRWG1-DR-LS-3001 - 3009 'Soft Landscaping Planting Plan' (See Section 9, Appendix 1)

Table 1.1 Street Tree Planting Schedule

Species	Form	Girth (cm)	Height (cm)	Root	Clear Stem (cm)	Quantity
<i>Acer campestre</i> 'Streetwise'	4X	18-20	450-600	RB	240 min	42
<i>Alnus cordata</i>	4X	18-20	450-600	RB	240 min	34
<i>Carpinus betulus</i> 'Frans Fontaine'	4X	18-20	450-600	RB	240 min	33
<i>Corylus colurna</i>	4X	18-20	450-600	RB	240 min	25
<i>Pyrus calleryana</i> 'Chanticleer'	4X	18-20	450-600	RB	240 min	17
<i>Quercus robur</i> 'Fastigiata Koster'	4X	18-20	450-600	RB	240 min	42
<i>Tilia cordata</i> 'Streetwise'	4X	18-20	450-600	RB	240 min	21
<i>Ulmus</i> 'New Horizon'	4X	18-20	450-600	RB	240 min	18

Abbreviations: RB= Root Balled, 4x = 4 times transplanted

5.5 Green Space (Individual) Tree Planting

5.5.1 Table 1.2 provides a species list and specification for all amenity tree planting associated with the Development works. Locations of all proposed green space trees are shown on drawings WMHP-TG-SRWG1-DR-LS-3001 - 3009 'Soft Landscaping Planting Plan' (See Section 9, Appendix 1)

Table 1.2 Green Space (Individual) Tree Planting Schedule

Species	Form	Girth (cm)	Height (cm)	Root	Clear Stem (cm)	Quantity
<i>Salix caprea</i>	S	8-10	250-300	RB	-	4
<i>Castanea sativa</i>	SM	18-20	450-600	RB	-	11
<i>Prunus avium</i>	SM	18-20	450-600	RB	-	16
<i>Quercus robur</i>	SM	18-20	450-600	RB	-	37
<i>Sorbus aucuparia</i>	SM	18-20	450-600	RB	-	13
<i>Sorbus torminalis</i>	SM	18-20	450-600	RB	-	30

Abbreviations: S= Standard, SM= Semi-Mature, BR= Bare Root, RB= Root Balled

5.6 Hedgerow Tree Planting

5.6.1 Table 1.3 provides a species list and specification for all hedgerow tree planting associated with the Development. Locations of all proposed hedgerow trees are shown on drawings WMHP-TG-SRWG1-DR-LS-3001 - 3009 'Soft Landscaping Planting Plan' (See Section 9, Appendix 1)

Table 1.3 Hedgerow Tree Planting Schedule

Species	Form	Girth (cm)	Height (cm)	Root	Clear Stem (cm)	Quantity
<i>Acer campestre</i>	SLi	6-8	250-300	BR	150min	19
<i>Prunus avium</i>	SLi	6-8	250-300	BR	150min	36
<i>Prunus</i> 'Sunset Boulevard'	SLi	6-8	250-300	BR	150min	18
<i>Quercus robur</i>	SLi	6-8	250-300	BR	150min	23
<i>Sorbus aucuparia</i> 'Cardinal Royal'	SLi	6-8	250-300	BR	150min	20

Abbreviations: SLi= Light Standard, BR= Bare Root

5.7 Woodland Mix

5.7.1 Table 1.4 provides a species list and specification for all proposed Woodland Mix on site. Locations of Woodland Mix is shown on drawing WMHP-TG-SRWG1-DR-LS-3001 - 3009 'Soft Landscaping Planting Plan' (See Section 9, Appendix 1).

5.7.2 All Woodland Mix areas will be under-seeded using the wildflower and grass seeding specified in section 6.3 'Meadow Seeding' of this report.

Table 1.5 Woodland Mix Schedule

Species	Form	Girth (cm)	Height (cm)	Root	Pot Size	% in mix	Quantity
<i>Acer campestre</i>	S	8-10	250-300	BR	-	10	114
<i>Betula pendula</i>	T	-	60-80	BR	-	5	62
<i>Carpinus betulus</i>	T	-	60-80	BR	-	10	114
<i>Castanea sativa</i>	T	-	60-80	BR	-	5	62
<i>Ilex aquifolium</i>	T	-	60-80	C	2	7	81
<i>Malus sylvestris</i>	T	-	60-80	BR	-	5	62
<i>Prunus avium</i>	S	8-10	250-300	BR	-	10	114
<i>Quercus robur</i>	S	8-10	250-300	BR	-	10	114
<i>Quercus robur</i>	T	-	60-80	BR	-	15	166
<i>Rhamus catharica</i>	T	-	60-80	BR	-	5	62
<i>Sorbus aucuparia</i>	T	-	60-80	BR	-	8	91
<i>Sorbus torminalis</i>	T	-	60-80	BR	-	5	62
<i>Tilia cordata</i>	T	-	60-80	BR	-	5	62

Mix Density: 1 plant per 4 m². All species planted randomly un species groups of 1, 3, 5 or 7.

250-300cm height trees to be 2-3X transplanted with minimum clear stem height of 1.75-2m.

Abbreviations: S= Standard, BR= Bare Root, RB= Root Balled, C= Containerised, T= Transplant

5.8 Wet Woodland Mix

5.8.1 Table 1.5 provides a species list and specification for all proposed Wet Woodland Mix on site. Locations of Wet Woodland Mix is shown on drawing WMHP-TG-SRWG1-DR-LS-3001 - 3009 'Soft Landscaping Planting Plan' (See Section 9, Appendix 1).

5.8.2 All Wet Woodland Mix areas will be under-seeded using the wildflower and grass seeding specified in section 6.5 'Wetland Meadow Seeding' of this report.

Table 1.5 Wet Woodland Mix Schedule

Species	Form	Age	Height (cm)	Root	% in mix	Quantity
<i>Alnus glutinosa</i>	T	1+1	60-80	BR	20	372
<i>Betula pubescens</i>	T	1+1	60-80	BR	20	372
<i>Salix alba</i>	T	1+1	60-80	BR	10	188
<i>Salix caprea</i>	T	1+1	60-80	BR	15	280

<i>Salix fragilis</i>	T	1+1	60-80	BR	10	188
<i>Salix purpurea</i>	T	1+1	60-80	BR	15	280
<i>Salix viminalis</i>	T	1+1	60-80	BR	10	188

Mix Density: 1 plant per 4 m². All species planted randomly in species groups of 1, 3, 5 or 7.

Abbreviations: T= Transplant, BR= Bare Root, 1+1 = 1 year transplant

5.9 Low Woodland Edge Mix

- 5.9.1 Table 1.6 provides a species list and specification for all proposed Low Woodland Edge Mix on site. Locations of Low Woodland Edge Mix is shown on drawing WMHP-TG-SRWG1-DR-LS-3001 - 3009 'Soft Landscaping Planting Plan' (See Section 9, Appendix 1)
- 5.9.2 All Low Woodland Edge Mix areas will be under-seeded using the wildflower and grass seeding specified in section 6.3 'Meadow Seeding' of this report.

Table 1.6 Low Woodland Edge Mix Schedule

Species	Form	Age	Height (cm)	Root	% in mix	Quantity
<i>Cornus sanguinea</i>	T	1+1	60-80	BR	15	48
<i>Euonymus europaeus</i>	T	1+1	60-80	BR	5	16
<i>Ligustrum vulgare</i>	T	1+1	60-80	BR	5	16
<i>Prunus spinosa</i>	T	1+1	60-80	BR	15	48
<i>Rhamnus cathartica</i>	T	1+1	60-80	BR	5	16
<i>Rosa arvensis</i>	T	1+1	60-80	BR	5	16
<i>Rosa canina</i>	T	1+1	60-80	BR	5	16
<i>Rosa rubiginosa</i>	T	1+1	60-80	BR	5	16
<i>Salix cinerea</i>	T	1+1	60-80	BR	30	96
<i>Sambucus nigra</i>	T	1+1	60-80	BR	5	16
<i>Viburnum opulus</i>	T	1+1	60-80	BR	5	16

Mix Density: 1 plant per 4 m². All species planted randomly in species groups of 1, 3, 5 or 7.

Abbreviations: T= Transplant, BR= Bare Root, 1+1 = 1 year transplant

5.10 Native Shrub Mix

- 5.10.1 Table 1.7 provides a species list and specification for all proposed Native Shrub Mix on site. Locations of Native Shrub Mix is shown on drawing WMHP-TG-SRWG1-DR-LS-3001 - 3009 'Soft Landscaping Planting Plan' (See Section 9, Appendix 1)
- 5.10.2 All Native Shrub Mix areas will be under-seeded using the wildflower and grass seeding specified in section 6.4 'Shade Tolerant Seeding' of this report.

Table 1.7 Native Shrub Mix Schedule

Species	Form	Age	Height (cm)	Root	Density per m ²	% in mix	Quantity
<i>Cornus sanguinea</i>	T	1+1	60-80	BR	1	10	114
<i>Corylus avellana</i>	T	1+1	60-80	BR	1	10	114
<i>Crataegus monogyna</i>	T	1+1	60-80	BR	1	10	114
<i>Euonymus europaeus</i>	T	1+1	60-80	BR	1	10	114
<i>Ilex aquifolium</i>	T	1+1	60-80	BR	1	5	59
<i>Ligustrum vulgare</i>	T	1+1	60-80	BR	1	10	114
<i>Prunus spinosa</i>	T	1+1	60-80	BR	1	5	59
<i>Rhamnus cathartica</i>	T	1+1	60-80	BR	1	10	114
<i>Rosa arvensis</i>	T	1+1	60-80	BR	1	10	114
<i>Rosa canina</i>	T	1+1	60-80	BR	1	10	114
<i>Viburnum opulus</i>	T	1+1	60-80	BR	1	10	114

All species planted randomly in species groups of 5 to 7.

Abbreviations: BR= Bare root

5.11 Hedgerow Mix

5.11.1 Table 1.8 provides a species list and specification for all proposed Hedgerow Mix on site. Locations of Hedgerow Mix is shown on drawing WMHP-TG-SRWG1-DR-LS-3001 - 3009 'Soft Landscaping Planting Plan' (See Section 9, Appendix 1).

Table 1.8 Hedgerow Mix Schedule

Species	Height (cm)	Root	Form	Age / Notes	Pot Size (L)	Density per m	% in mix	Quantity
<i>Acer campestre</i>	60-80	BR	T	1+1		5	10	1279
<i>Cornus sanguinea</i>	60-80	BR	T	1+1		5	5	646
<i>Corylus avellana</i>	60-80	BR	T	1+1		5	15	1914

<i>Crataegus monogyna</i>	60-80	BR	T	1+1		5	20	2548
<i>Euonymus europaeus</i>	60-80	BR	T	1+1		5	5	646
<i>Ligustrum vulgare</i>	60-80	BR	T	1+1		5	5	646
<i>Prunus spinosa</i>	60-80	BR	T	1+1		5	10	1279
<i>Rhamnus cathartica</i>	60-80	BR	T	1+1		5	10	1279
<i>Rosa canina</i>	60-80	C		Bushy, 4brks	3	5	10	1279
<i>Viburnum opulus</i>	60-80	C		Bushy, 4brks	3	5	10	1279

All species planted randomly in species groups of 3 to 5, laid in double staggered rows.

Abbreviations: C= Containerised, BR= Bare Root, T=Transplant, 1+1 = 1 year transplant

5.12 Herbaceous Riparian Mix

5.12.1 Table 1.9 provides a species list and specification for all proposed Herbaceous Riparian Mix on site. Locations of Herbaceous Riparian Mix is shown on drawing WMHP-TG-SRWG1-DR-LS-3001 - 3009 'Soft Landscaping Planting Plan' (See Section 9, Appendix 1)

Table 1.9 Riparian Mix Schedule

Species	Root	Plug Size (cm)	Notes	Density per m ²	% in mix	Quantity
<i>Angelica sylvestris</i>	C	5	Plug established root 2-3 months minimum	5	8	9569
<i>Caltha palustris</i>	C	5	Plug established root 2-3 months minimum	5	7	8373
<i>Cardamine pratensis</i>	C	5	Plug established root 2-3 months minimum	5	7	8373
<i>Carex riparia</i>	C	5	Plug established root 2-3 months minimum	5	7	8373
<i>Eupatorium cannabinum</i>	C	5	Plug established root 2-3 months minimum	5	7	8373
<i>Filipendula ulmaria</i>	C	5	Plug established root 2-3 months minimum	5	7	8373
<i>Geum rivale</i>	C	5	Plug established root 2-3 months minimum	5	7	8373

<i>Iris pseudacorus</i>	C	5	Plug established root 2-3 months minimum	5	7	8373
<i>Juncus effusus</i>	C	5	Plug established root 2-3 months minimum	5	7	8373
<i>Lythrum salicaria</i>	C	5	Plug established root 2-3 months minimum	5	7	8373
<i>Phragmites australis</i>	C	5	Plug established root 2-3 months minimum	5	7	8373
<i>Scrophularia auriculata</i>	C	5	Plug established root 2-3 months minimum	5	7	8373
<i>Silene flos-cuculi</i>	C	5	Plug established root 2-3 months minimum	5	7	8373
<i>Veronica beccabunga</i>	C	5	Plug established root 2-3 months minimum	5	8	9569

All species planted randomly in species groups of 7 to 9.

Abbreviations: C= Containerised

5.13 Low Native Shrub Mix

5.13.1 Table 1.10 provides a species list and specification for all proposed Low Native Shrub Mix on site. Locations of Low Native Shrub Mix is shown on drawing WMHP-TG-SRWG1-DR-LS-3001 - 3009 'Soft Landscaping Planting Plan' (See Section 9, Appendix 1).

5.13.2 All Low Native Shrub Mix areas will be under-seeded using the wildflower and grass seeding specified in section 6.4 'Shade Tolerant Seeding' of this report.

Table 1.10 Low Native Shrub Mix Schedule

Species	Form	Age	Height (cm)	Root	Density per m ²	% in mix	Quantity
<i>Cornus sanguinea</i>	T	1+1	60-80	BR	1	20	173
<i>Ligustrum vulgare</i>	T	1+1	60-80	BR	1	20	173
<i>Prunus spinosa</i>	T	1+1	60-80	BR	1	5	44
<i>Rosa rubiginosa</i>	T	1+1	60-80	BR	1	20	173
<i>Rosa arvensis</i>	T	1+1	60-80	BR	1	15	130
<i>Rosa canina</i>	T	1+1	60-80	BR	1	20	173

All species planted randomly in species groups of 5 to 7.

Abbreviations: BR= Bare root

5.14 Low Wet Shrub Mix

5.14.1 Table 1.11 provides a species list and specification n for all proposed Low Wet Shrub Mix on site. Locations of Low Wet Shrub Mix is shown on drawing WMHP-TG-SRWG1-DR-LS-3001 - 3009 'Soft Landscaping Planting Plan' (See Section 9, Appendix 1).

5.14.2 All Low Wet Shrub Mix areas will be under-seeded using the wildflower and grass seeding specified in section 6.5 'Wetland Meadow Seeding' of this report.

Table 1.11 Low Wet Shrub Mix Schedule

Species	Form	Age	Height (cm)	Root	Density per m ²	% in mix	Quantity
<i>Corylus avellana</i>	T	1+1	60-80	BR	1	20	378
<i>Sambucus nigra</i>	T	1+1	60-80	BR	1	15	291
<i>Salix caprea</i>	T	1+1	60-80	BR	1	15	291
<i>Salix purpurea</i>	T	1+1	60-80	BR	1	15	291
<i>Prunus spinosa</i>	T	1+1	60-80	BR	1	10	194
<i>Salix viminalis</i>	T	1+1	60-80	BR	1	15	291
<i>Viburnum opulus</i>	T	1+1	60-80	BR	1	10	194

All species planted randomly in species groups of 5 to 7.

Abbreviations: BR= Bare root

6 Seeding

6.1 Introduction

- 6.1.1 Seeding areas should be sown with either a suitable wildflower meadow mix that replicates other grassland and wildflower areas local to the Development are. Sowing should be undertaken in accordance with the seed supplier's instructions. All locations for seeding areas are shown on drawing WMHP-TG-SRWG1-DR-LS-3001 - 3009 'Soft Landscaping Planting Plan' (See Section 9, Appendix 1).

6.2 Flowering Lawn Seeding

- 6.2.1 Table 1.12 provides a general-purpose flowering lawn seed mix containing native wildflower and grassland species and is suggested for use on all proposed Flowering Lawn areas shown on drawing WMHP-TG-SRWG1-DR-LS-3001 - 3009 'Soft Landscaping Planting Plan' (See Section 9, Appendix 1).

Table 1.12 Flowering Lawn Mix Species Schedule

Emorsgate EL1 Flowering Lawn Mixture – Sowing rate: 40kg per Ha, total area 1.56 Ha		
%	Scientific name	Common name
Wildflowers (20% of overall mix)		
1.0%	<i>Achillea millefolium</i>	Yarrow
1.0%	<i>Anthyllis vulneraria</i>	Kidney Vetch
0.4%	<i>Betonica officinalis</i>	Betony
1.5%	<i>Centaurea nigra</i>	Common Knapweed
0.4%	<i>Galium album</i>	Hedge Bedstraw
1.5%	<i>Galium verum</i>	Lady's Bedstraw
0.4%	<i>Knautia arvensis</i>	Field Scabious
0.5%	<i>Leontodon hispidus</i>	Rough Hawkbit
1.0%	<i>Leucanthemum vulgare</i>	Oxeye Daisy - (Moon Daisy)
1.0%	<i>Medicago lupulina</i>	Black Medick
0.4%	<i>Plantago lanceolata</i>	Ribwort Plantain
2.0%	<i>Plantago media</i>	Hoary Plantain
2.0%	<i>Primula veris</i>	Cowslip
0.4%	<i>Prunella vulgaris</i>	Selfheal
0.4%	<i>Ranunculus acris</i>	Meadow Buttercup
1.6%	<i>Ranunculus bulbosus</i>	Bulbous Buttercup

Emorsgate EL1 Flowering Lawn Mixture – Sowing rate: 40kg per Ha, total area 1.56 Ha		
%	Scientific name	Common name
4.0%	<i>Trifolium pratense</i>	Wild Red Clover
Grasses (80% of overall mix)		
8.0%	<i>Agrostis capillaris</i>	Common Bent
28.0%	<i>Cynosurus cristatus</i>	Crested Dogstail
24.0%	<i>Festuca rubra</i>	Red Fescue
4.0%	<i>Phleum bertolonii</i>	Smaller Cat's-tail
16.0%	<i>Poa pratensis</i>	Smooth-stalked Meadow-grass

6.3 Wildflower Meadow Seeding

6.3.1 Table 1.13 provides a general-purpose seed mix containing native wildflower and grassland species and is suggested for use on all proposed Meadow Seed areas shown on drawing WMHP-TG-SRWG1-DR-LS-3001 - 3009 'Soft Landscaping Planting Plan' (See Section 9, Appendix 1).

Table 1.13 Wildflower Meadow Mix Species Schedule

Emorsgate EM3 Special General Purpose Meadow Mixture– Sowing rate: 40kg per Ha, total area 3.93 Ha		
%	Scientific name	Common name
Wildflowers (20% of overall mix)		
0.4%	<i>Agrimonia eupatoria</i>	Agrimony
0.4%	<i>Anthyllis vulneraria</i>	Kidney Vetch
1.6%	<i>Centaurea nigra</i>	Common Knapweed
0.6%	<i>Centaurea scabiosa</i>	Greater Knapweed
0.1%	<i>Chaerophyllum temulum</i>	Rough Chervil
0.4%	<i>Cruciata laevipes</i>	Crosswort
1.2%	<i>Daucus carota</i>	Wild Carrot
0.2%	<i>Echium vulgare</i>	Viper's Bugloss
1.0%	<i>Galium album</i>	Hedge Bedstraw
0.8%	<i>Galium verum</i>	Lady's Bedstraw
0.1%	<i>Geranium pratense</i>	Meadow Crane's-bill
1.0%	<i>Knautia arvensis</i>	Field Scabious
0.2%	<i>Lathyrus pratensis</i>	Meadow Vetchling
0.8%	<i>Leucanthemum vulgare</i>	Oxeye Daisy - (Moon Daisy)

Emorsgate EM3 Special General Purpose Meadow Mixture– Sowing rate: 40kg per Ha, total area 3.93 Ha		
%	Scientific name	Common name
2.2%	<i>Malva moschata</i>	Musk Mallow
0.6%	<i>Medicago lupulina</i>	Black Medick
0.2%	<i>Onobrychis viciifolia</i>	Sainfoin
0.2%	<i>Origanum vulgare</i>	Wild Marjoram
2.2%	<i>Plantago lanceolata</i>	Ribwort Plantain
0.4%	<i>Plantago media</i>	Hoary Plantain
1.8%	<i>Poterium sanguisorba</i> - (<i>Sanguisorba minor</i>)	Salad Burnet
0.4%	<i>Primula veris</i>	Cowslip
0.2%	<i>Prunella vulgaris</i>	Selfheal
0.4%	<i>Ranunculus acris</i>	Meadow Buttercup
1.0%	<i>Rhinanthus minor</i>	Yellow Rattle
0.1%	<i>Sanguisorba officinalis</i>	Great Burnet
1.0%	<i>Silene dioica</i>	Red Champion
0.2%	<i>Silene vulgaris</i>	Bladder Champion
0.1%	<i>Taraxacum officinale</i>	Dandelion
0.2%	<i>Vicia sativa ssp. segetalis</i>	Common Vetch
Grasses (80% of overall mix)		
8.0%	<i>Agrostis capillaris</i>	Common Bent
28.0%	<i>Cynosurus cristatus</i>	Crested Dogstail
24.0%	<i>Festuca rubra</i>	Red Fescue
4.0%	<i>Phleum bertolonii</i>	Smaller Cat's-tail
16.0%	<i>Poa pratensis</i>	Smooth-stalked Meadow-grass

6.4 Shade Tolerant Wildflower Seeding

6.4.1 Table 1.14 provides a shade tolerant seed mix containing native wildflower and grassland species and is suggested for use on all proposed Shade Tolerant Wildflower Meadow areas shown on drawing WMHP-TG-SRWG1-DR-LS-3001 - 3009 'Soft Landscaping Planting Plan' (See Section 9, Appendix 1).

Table 1.14 Wildflower Meadow Mix (Semi-Shade) Species Schedule

Emorsgate EH1 Hedgerow Mixture– Sowing rate: 40kg per Ha, total area 0.43 Ha		
%	Scientific name	Common name
Wildflowers (20% of overall mix)		
0.5%	<i>Agrimonia eupatoria</i>	Agrimony
1.0%	<i>Alliaria petiolata</i>	Garlic Mustard
0.5%	<i>Anthriscus sylvestris</i>	Cow Parsley
1.0%	<i>Arctium minus</i>	Lesser Burdock
2.0%	<i>Centaurea nigra</i>	Common Knapweed
0.4%	<i>Chaerophyllum temulum</i>	Rough Chervil
0.8%	<i>Cruciata laevipes</i>	Crosswort
0.8%	<i>Daucus carota</i>	Wild Carrot
1.5%	<i>Dipsacus fullonum</i>	Wild Teasel
0.4%	<i>Filipendula ulmaria</i>	Meadowsweet
1.5%	<i>Galium album</i>	Hedge Bedstraw
0.4%	<i>Geum urbanum</i>	Wood Avens
0.3%	<i>Geranium pratense</i>	Meadow Crane's-bill
1.0%	<i>Lathyrus sylvestris</i>	Narrow-leaved Everlasting-pea
1.2%	<i>Leucanthemum vulgare</i>	Oxeye Daisy - (Moon Daisy)
1.0%	<i>Malva moschata</i>	Musk Mallow
0.3%	<i>Origanum vulgare</i>	Wild Marjoram
0.8%	<i>Plantago lanceolata</i>	Ribwort Plantain
0.6%	<i>Primula veris</i>	Cowslip
0.4%	<i>Rumex acetosa</i>	Common Sorrel
2.0%	<i>Silene dioica</i>	Red Campion
0.8%	<i>Silene vulgaris</i>	Bladder Campion
0.8%	<i>Vicia cracca</i>	Tufted Vetch
Grasses (80% of overall mix)		
2.4%	<i>Agrostis capillaris</i>	Common Bent
1.6%	<i>Anthoxanthum odoratum</i>	Sweet Vernal-grass
0.8%	<i>Brachypodium sylvaticum</i>	False Brome
48.0%	<i>Cynosurus cristatus</i>	Crested Dogstail
1.6%	<i>Deschampsia cespitosa</i>	Tufted Hair-grass
19.2%	<i>Festuca rubra</i>	Red Fescue
6.4%	<i>Poa nemoralis</i>	Wood Meadow-grass

6.5 Wetland Meadow Seeding

6.5.1 Table 1.15 provides a seed mix suitable for seasonally wet soil, containing native wildflower and grassland species and is suggested for use on all proposed Wetland Meadow and Rain Garden seed mix areas shown on drawing WMHP-TG-SRWG1-DR-LS-3001 - 3009 'Soft Landscaping Planting Plan' (See Section 9, Appendix 1).

Table 1.15 Wetland Meadow Species Schedule

Emorsgate EM8 Meadow Mixture For Wetlands– Sowing rate: 40kg per Ha, total area 1.43Ha		
%	Scientific name	Common name
Wildflowers (20% of overall mix)		
0.7%	<i>Achillea millefolium</i>	Yarrow
0.6%	<i>Agrimonia eupatoria</i>	Agrimony
0.1%	<i>Angelica sylvestris</i>	Wild Angelica
0.2%	<i>Betonica officinalis</i>	Betony
3.2%	<i>Centaurea nigra</i>	Common Knapweed
1.4%	<i>Filipendula ulmaria</i>	Meadowsweet
0.4%	<i>Galium album</i>	Hedge Bedstraw
2.0%	<i>Galium verum</i>	Lady's Bedstraw
0.8%	<i>Lathyrus pratensis</i>	Meadow Vetchling
0.6%	<i>Leontodon hispidus</i>	Rough Hawkbit
1.2%	<i>Leucanthemum vulgare</i>	Oxeye Daisy - (Moon Daisy)
0.6%	<i>Lotus corniculatus</i>	Birdsfoot Trefoil
0.1%	<i>Lotus pedunculatus</i>	Greater Birdsfoot Trefoil
1.0%	<i>Medicago lupulina</i>	Black Medick
2.0%	<i>Plantago lanceolata</i>	Ribwort Plantain
0.4%	<i>Primula veris</i>	Cowslip
0.8%	<i>Prunella vulgaris</i>	Selfheal
1.2%	<i>Ranunculus acris</i>	Meadow Buttercup
0.8%	<i>Rhinanthus minor</i>	Yellow Rattle
0.6%	<i>Rumex acetosa</i>	Common Sorrel
0.3%	<i>Sanguisorba officinalis</i>	Great Burnet
0.5%	<i>Silene flos-cuculi (Lychnis flos-cuculi)</i>	Ragged Robin
0.2%	<i>Taraxacum officinale</i>	Dandelion
0.3%	<i>Vicia cracca</i>	Tufted Vetch

Emorsgate EM8 Meadow Mixture For Wetlands– Sowing rate: 40kg per Ha, total area 1.43Ha		
%	Scientific name	Common name
Grasses (80% of overall mix)		
4.0%	<i>Agrostis capillaris</i>	Common Bent
4.0%	<i>Anthoxanthum odoratum</i>	Sweet Vernal-grass
0.8%	<i>Carex divulsa subsp. divulsa</i>	Grey Sedge
33.6%	<i>Cynosurus cristatus</i>	Crested Dogstail
1.6%	<i>Deschampsia cespitosa</i>	Tufted Hair-grass
20.0%	<i>Festuca rubra</i>	Red Fescue
3.2%	<i>Hordeum secalinum</i>	Meadow Barley
5.6%	<i>Phleum bertolonii</i>	Smaller Cat's-tail
5.6%	<i>Poa trivialis</i>	Rough-stalked Meadow-grass
1.6%	<i>Schedonorus arundinaceus</i>	Tall Fescue

6.6 Wetland Meadow Seeding Type 2 (EM8+)

6.6.1 Table 1.16 provides an enhanced Emorsgate EM8-Meadow Mixture for Wetlands, seed mix suitable for seasonally wet soil, referred to as EM8+ on drawings with supplementary plug planting illustrated in table 1.17. The mixes contain native wildflower and grassland species and is suggested for use within SANG attenuation basin, areas shown on drawing WMHP-TG-SRWG1-DR-LS-3008 - 3009 'Soft Landscaping Planting Plan' (Appendix 1).

Table 1.16 Wetland Meadow Species Schedule

Emorsgate EM8 Meadow Mixture For Wetlands– Sowing rate: 40kg per Ha, total area 1.19 Ha		
%	Scientific name	Common name
Wildflowers (20% of overall mix)		
0.7%	<i>Achillea millefolium</i>	Yarrow
0.6%	<i>Agrimonia eupatoria</i>	Agrimony
0.1%	<i>Angelica sylvestris</i>	Wild Angelica
0.2%	<i>Betonica officinalis</i>	Betony
3.2%	<i>Centaurea nigra</i>	Common Knapweed
1.4%	<i>Filipendula ulmaria</i>	Meadowsweet
0.4%	<i>Galium album</i>	Hedge Bedstraw
2.0%	<i>Galium verum</i>	Lady's Bedstraw

Emorsgate EM8 Meadow Mixture For Wetlands– Sowing rate: 40kg per Ha, total area 1.19 Ha		
%	Scientific name	Common name
0.8%	<i>Lathyrus pratensis</i>	Meadow Vetchling
0.6%	<i>Leontodon hispidus</i>	Rough Hawkbit
1.2%	<i>Leucanthemum vulgare</i>	Oxeye Daisy - (Moon Daisy)
0.6%	<i>Lotus corniculatus</i>	Birdsfoot Trefoil
0.1%	<i>Lotus pedunculatus</i>	Greater Birdsfoot Trefoil
1.0%	<i>Medicago lupulina</i>	Black Medick
2.0%	<i>Plantago lanceolata</i>	Ribwort Plantain
0.4%	<i>Primula veris</i>	Cowslip
0.8%	<i>Prunella vulgaris</i>	Selfheal
1.2%	<i>Ranunculus acris</i>	Meadow Buttercup
0.8%	<i>Rhinanthus minor</i>	Yellow Rattle
0.6%	<i>Rumex acetosa</i>	Common Sorrel
0.3%	<i>Sanguisorba officinalis</i>	Great Burnet
0.5%	<i>Silene flos-cuculi (Lychnis flos-cuculi)</i>	Ragged Robin
0.2%	<i>Taraxacum officinale</i>	Dandelion
0.3%	<i>Vicia cracca</i>	Tufted Vetch
Grasses (80% of overall mix)		
4.0%	<i>Agrostis capillaris</i>	Common Bent
4.0%	<i>Anthoxanthum odoratum</i>	Sweet Vernal-grass
0.8%	<i>Carex divulsa subsp. divulsa</i>	Grey Sedge
33.6%	<i>Cynosurus cristatus</i>	Crested Dogstail
1.6%	<i>Deschampsia cespitosa</i>	Tufted Hair-grass
20.0%	<i>Festuca rubra</i>	Red Fescue
3.2%	<i>Hordeum secalinum</i>	Meadow Barley
5.6%	<i>Phleum bertolonii</i>	Smaller Cat's-tail
5.6%	<i>Poa trivialis</i>	Rough-stalked Meadow-grass
1.6%	<i>Schedonorus arundinaceus</i>	Tall Fescue

Table 1.17 Wetland Meadow Supplementary Plug Planting Schedule for Backwater Embankments

Supplementary Plug Plant:			
Scientific name	Common Name	% in mix	Quantity
<i>Angelica sylvestris</i>	Wild Angelica	20	1180
<i>Caltha palustris</i>	Marsh Marigold	20	1180
<i>Eupatorium cannabinum</i>	Hemp Agrimony	15	886
<i>Lythrum salicaria</i>	Purple Loosestrife	20	1180
<i>Mentha aquatica</i>	Water Mint	15	886
<i>Phragmites australis</i>	Common Reed	10	592

Plug plants to be established root 2-3 months old. Plug planting density 0.5plant per meter square.

6.7 Emergent Macrophyte Wetland Meadow

6.7.1 Table 1.18 provides details for emergent macrophyte planting which is suggested for used on all proposed slopes of the backwater areas shown on drawing WMHP-TG-SRWG1-DR-LS-3008 - 3009 'Soft Landscaping Planting Plan' (Appendix 1) and Cross Section drawings WMHP-TG-SRWG1-DR-LA-3024 - 3022 (Appendix 2).

Table 1.18 Wetland Meadow Emergent Macrophyte Species Schedule for Backwater Embankments

%	Scientific name	Common name
10%	<i>Carex acuitformis</i>	Lesser Pond Sage
10%	<i>Carex riparia</i>	Greater Pond Sage
10%	<i>Glyceria maxima</i>	Reed Sweet Grass
10%	<i>Juncus effusus</i>	Smooth rush
10%	<i>Lythrum salicaria</i>	Purple Loosestrife
10%	<i>Mentha aquatica</i>	Water Mint
10%	<i>Myosotis scorpiodes</i>	Water Forget me Not
10%	<i>Phalaris arundinacea</i>	Reed Canary Grass
10%	<i>Ranunculus flammula</i>	Lesser Spearwort
10%	<i>Sparganium erectum</i>	Branched Bur Reed

7 Aftercare

7.1 Introduction

- 7.1.1 To ensure a reasonable level of establishment, newly planted and seeded areas associated with the Development should be monitored and maintained for a period of 5 years following completion of planting works associated with each stage of works.

7.2 General

- 7.2.1 All newly planted areas should be maintained free from litter and excessive weed growth (i.e. growth that would be detrimental to the intended planting). Litter, grass cuttings or other deleterious materials should not be deposited on any of the planted areas during the establishment period. Should this occur then the deleterious material should be removed and responsibly disposed of away from site.

7.3 Watering

- 7.3.1 All newly planted areas should be watered immediately after planting and again during periods of drought. This should be done at a rate of 50 litres per tree and at weekly intervals during extended drought.
- 7.3.2 Large specimen trees will need to be watered twice a week during the first year (25 – 30 litres per visit) but more frequently during prolonged dry periods. This can be reduced during subsequent years. If water supply is, or is likely to be, restricted by emergency legislation, submit proposals for an alternative suitable source of water. Obtain instructions before proceeding.
- 7.3.3 Generally, watering to be carried out to the following principles:
- Quantity: Wet full depth of topsoil.
 - Application: Do not damage or loosen plants.
 - Compacted soil: Loosen or scoop out, to direct water to root zone.
 - Frequency: As necessary for the continued thriving of all planting.

7.4 Pruning

- 7.4.1 Trees and shrubs should be monitored for any deadwood, crossing branches and should be pruned accordingly to encourage healthy, strong growth.
- 7.4.2 Trees with clear stems should be maintained as such with any lower branches removed as required.

7.5 Weed Control

- 7.5.1 There is a general presumption against the use of herbicides, pesticides and fertilisers, which should be restricted to essential tasks when other management methods are not feasible.
- 7.5.2 A weed free area, to a minimum of 250mm around the base of each newly planted tree or shrub, and length of hedgerow should be maintained during establishment. Weed growth to be pulled from inside any tree or shrub shelters, and maintain a weed free area between plants by strimming to remove excessing weed growth, twice a year.
- 7.5.3 Areas outside of the weed free areas should be maintained in-line with the specified wildflower and grass seeding management prescriptions outlined in the Landscape and Ecological Management Plan.
- 7.5.4 Weed control should be undertaken during the growing season, typically from March through to October however this may vary depending of the season and should occur at least 3 times during the season. Any use of herbicide applications should be strictly in accordance with the Control of Pesticides Regulations 1986 (as amended 1997) (or, otherwise, updated/superseded legislation) and following manufacturer's instructions by qualified staff.

7.6 Stakes and Protective Guards

- 7.6.1 Tree and shrub stakes and guards should be inspected twice yearly to ensure they are secure and in place and ties should be adjusted as required to allow for growth. The contractor should ensure that the protective guards do not impede the natural growth of the plant.
- 7.6.2 Plant guards and stakes should be removed and responsibly disposed of away from site once the plant has fully established or at the end of the fifth growing season, whichever is sooner.

7.7 Mulch

- 7.7.1 A depth of 100mm if course bark mulch should be maintained at the base of each newly planted tree or shrub. This should be topped up on an annual basis or as required to maintain depth.

7.8 Plant Failures

- 7.8.1 Should any trees or shrubs planted as part of the landscape scheme, within a period of five years after planting, be removed, die or become, seriously damaged or diseased, it is to be replaced in the first available planting season with a specimen of the same species and size as that originally planted.

7.9 Mowing – Amenity Grass

7.9.1 The amenity should be maintained in-line with the suppliers' recommendations, typically:

- Following successful establishment, cut regularly to maintain a height of 20-50cm with a minimum of 10 cuts per year, removing arisings from site;
- Carefully dig out or spot treat any residual perennial weeds such as docks as required throughout establishment.

7.10 Mowing – Wildflower Seeding

7.10.1 The wildflower meadow should be maintained in-line with the suppliers' recommendations, typically:

- In year 1 following seeding, cut regularly to maintain a height of 40-60cm, removing arisings from site;
- In years 2-5, cut grass to a height of 50mm in late July/ August after flowering, leaving arisings in situ for a period of 7 days then clear and remove from site.
- Cut again in October to a height of 50mm; and
- Carefully dig out or spot treat any residual perennial weeds such as docks as required throughout establishment.

7.11 Mowing – Wetland / Pond Meadow Seeding

7.11.1 The pond edge seeding should be maintained in-line with the suppliers' recommendations, typically:

- In year 1 following seeding, cut back to encourage the development of good perennial ground cover.
- Once established, cut back and remove short sections of vegetation every 2-3 years on rotation. Dense stands of single species may require selective thinning.
- Carefully dig out or spot treat any residual perennial weeds such as docks as required throughout establishment.


8 Implementation Timeframes

- 8.1.1 All proposed tree and shrub planting and meadow seeding works will be implemented in the first available planting season (October – March) following the completion of the Development works.

9 Appendices

**Appendix 1
Planting Plan'**

WMHP-TG-SRWG1-DR-LS-3001-3009 'Soft Landscaping

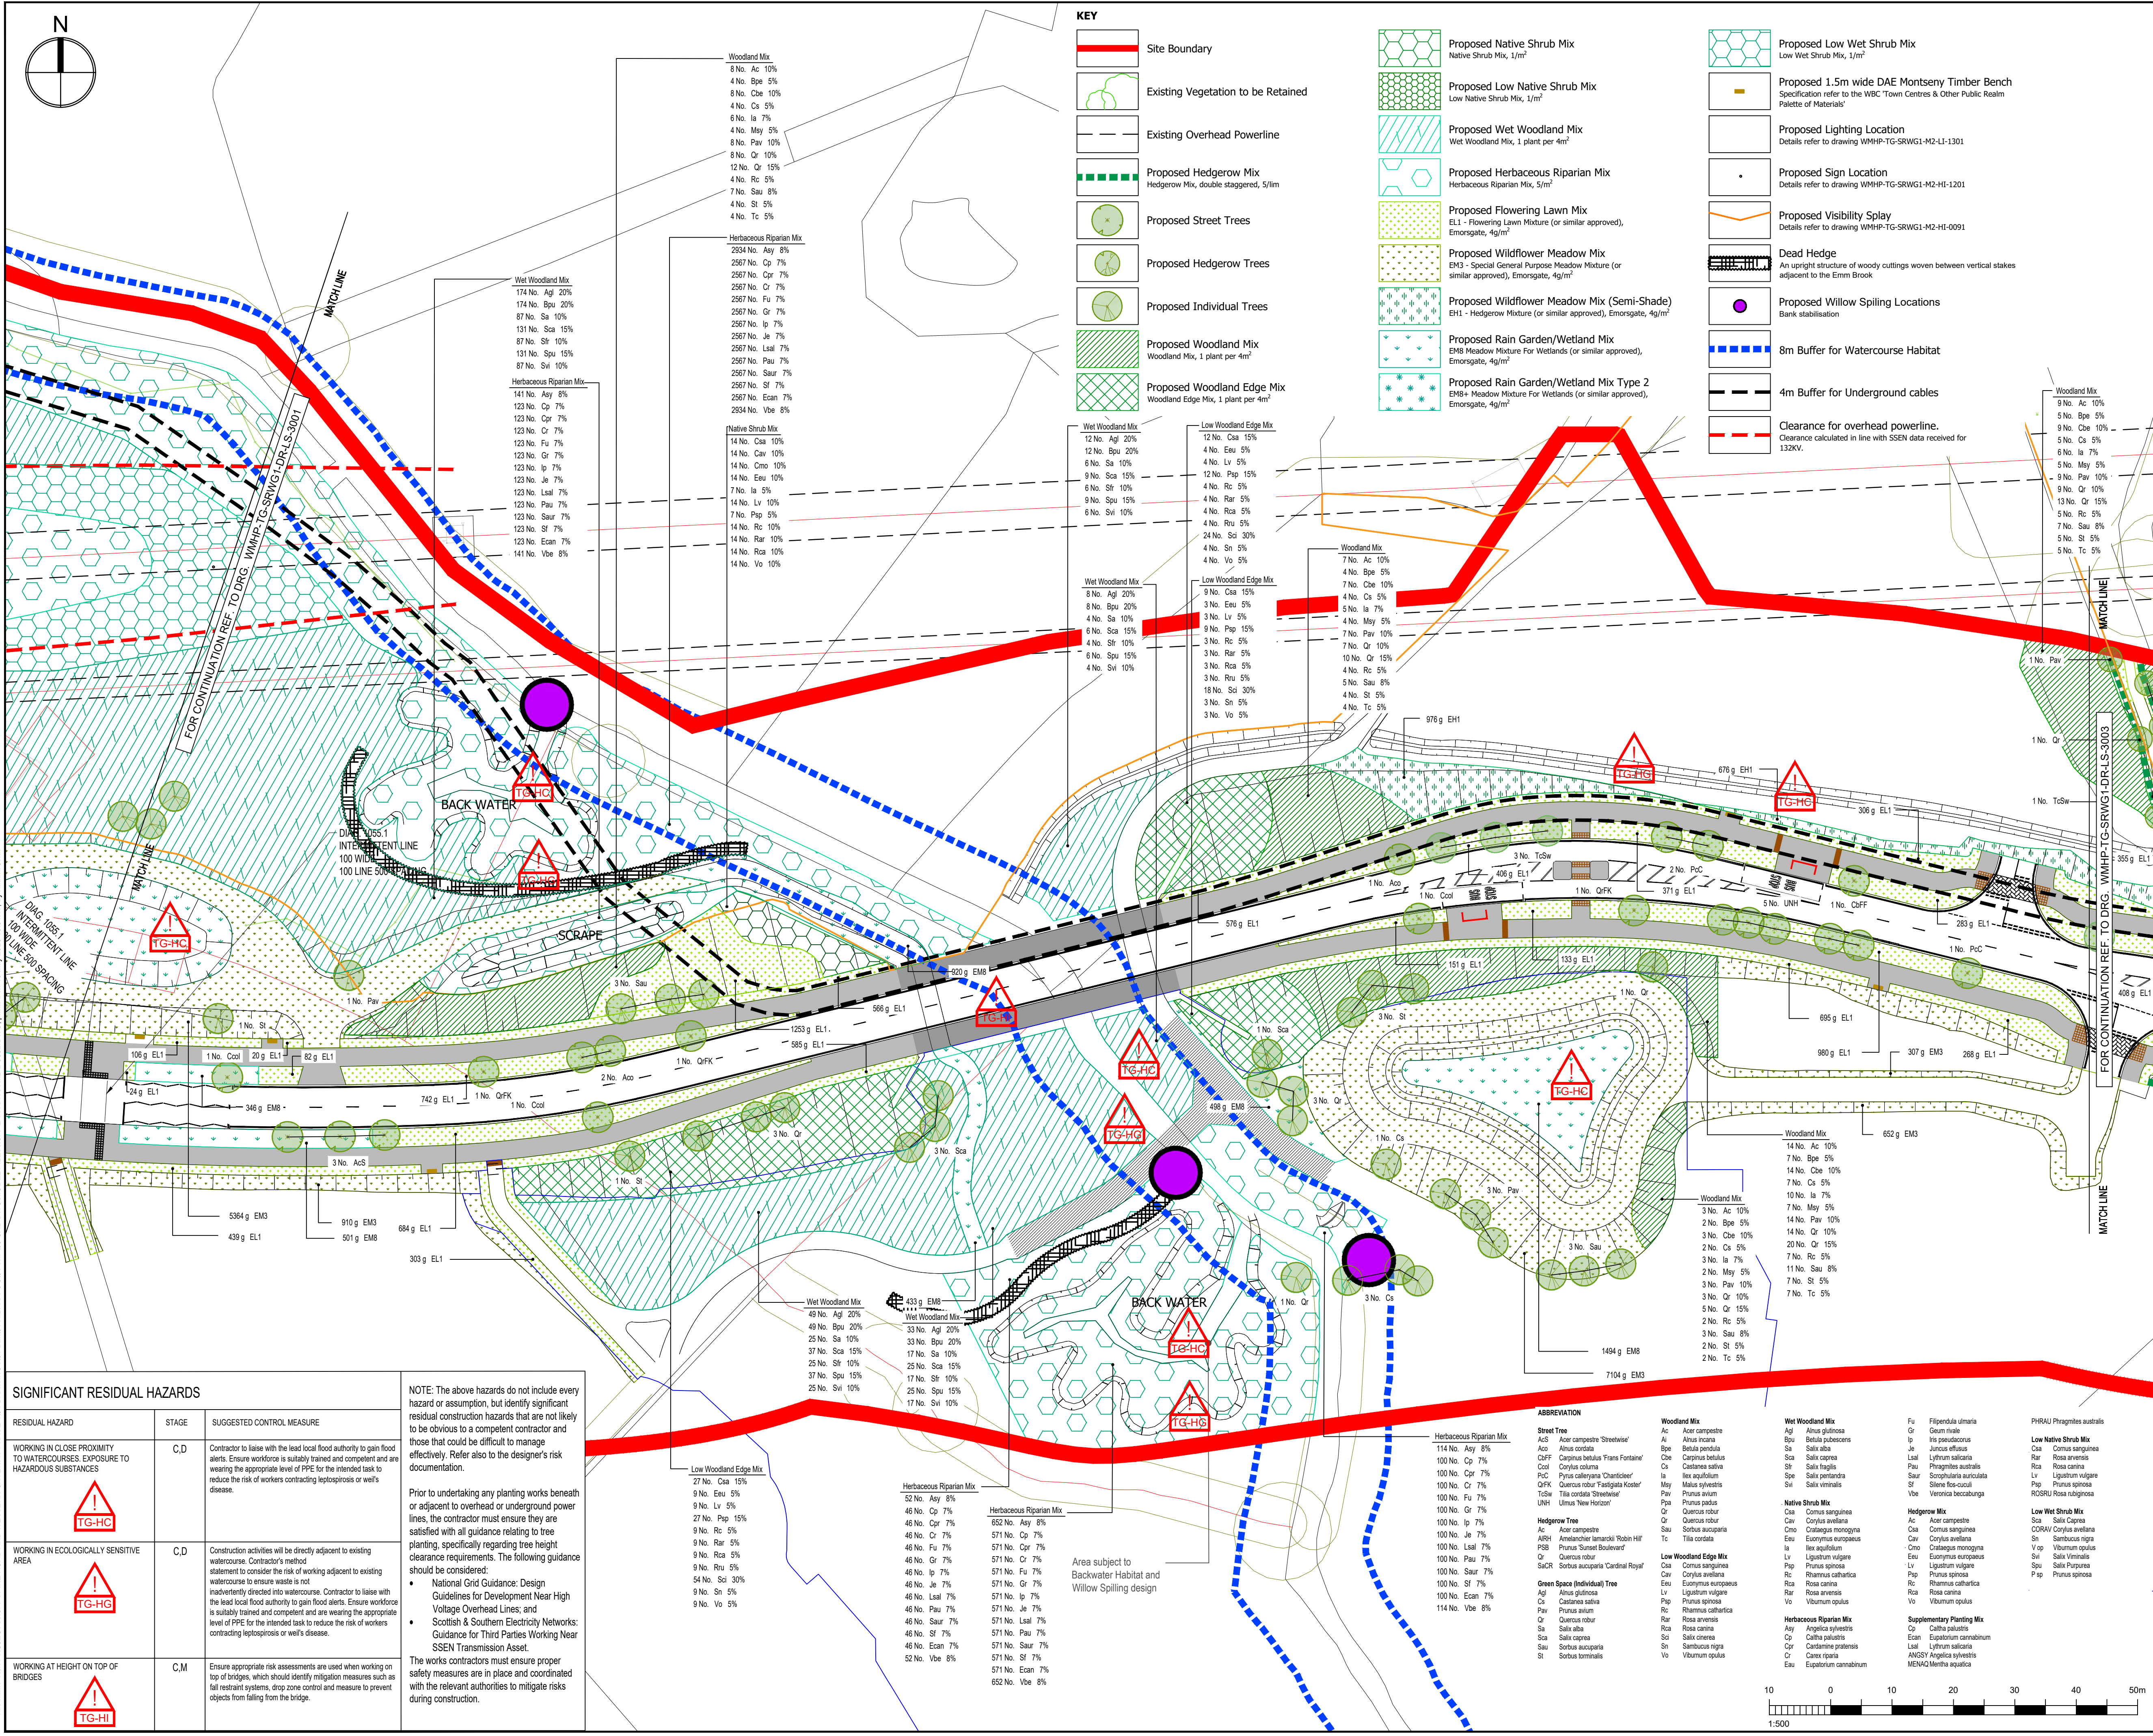

DO NOT SCALE

- TREE PIT CONSTRUCTION DETAILS REFER TO DRAWINGS WMHP-TG-SRWG1-DR-LS-3010 - 3011
- ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.
- ALL LEVELS ARE IN METRES AOD UNLESS NOTED OTHERWISE.
- REFER TO THE 500 SERIES FOR LEVEL INFORMATION
- FENCE DETAILS REFER TO DRAWINGS WMHP-TG-SRWG1-DR-LS-3001 - 3009
- ROAD RESTRAINT SYSTEMS REFER TO DRAWINGS WMHP-TG-SRWG1-DR-HI-0401 - 0409 AND 0421
- ALL NEW AND EXISTING SHRUB PLANTING, TREES AND VEGETATION TO BE PRUNED AND MAINTAINED IN PERPETUITY TO ALLOW FULL VISIBILITY OF ROAD SIGNAGE

SITE LOCATION PLAN

SCALE: 1:25000

REV	DATE	BY	DESCRIPTION	CHK	APP
P11	13/05/2025	NJ	REVISED TO MEET LAP AND STAKE HOLDERS COMMENTS	JC	JC
P10	07/05/2025	NJ	REVISED TO MEET LPA COMMENTS	JC	JC
P09	04/02/2025	NJ	REVISED TO REMOVE TRANSLOCATED TURF	JC	JC

DRAWING STATUS: **SUITABLE FOR REVIEW AND COMMENT** S3

DESIGNER:

Tony Gee
Consulting Civil, Structural and Geotechnical Engineers
www.tonygee.com

CLIENT:

WOKINGHAM BOROUGH COUNCIL
Shute End, Wokingham, Berkshire RG40 1BN
Tel: (0118) 974 6000 Web: www.wokingham.gov.uk

PROJECT:

SPINE ROAD AND WESTERN GATEWAY PHASE 1

TITLE:

HIGHWAYS
SOFT LANDSCAPING PLANTING PLAN

SCALE @ A1:

1:500

CHECKED:

JC

APPROVED:

JC

PROJECT NO:

C118047

DESIGNED:

WM

DRAWN:

WM

DATE:

May 25


DRAWING NO:

WMHP-TG-SRWG1-DR-LS-3002

P11

File name: Y:\1. PROJECTS\SPINE ROAD AND WESTERN GATEWAY PHASE 1\10. DRAWINGS\10.1 BIM\01. WP\03. CAD\DWG\002.DWG, printed on 16 May 2025 16:34:17, by Nialla John

File name: Y:\1. PROJECTS\87 SPINE ROAD AND WESTERN GATEWAY PHASE 104 DRAWINGS\01 BIM\01 RBA ST 0-301 WIP\03 CAD DWG\MODEL FILES\877-LAN-XX-XX-M2-L-0002.DWG, printed on 18 May 2025 16:35:30 by Nikitha John

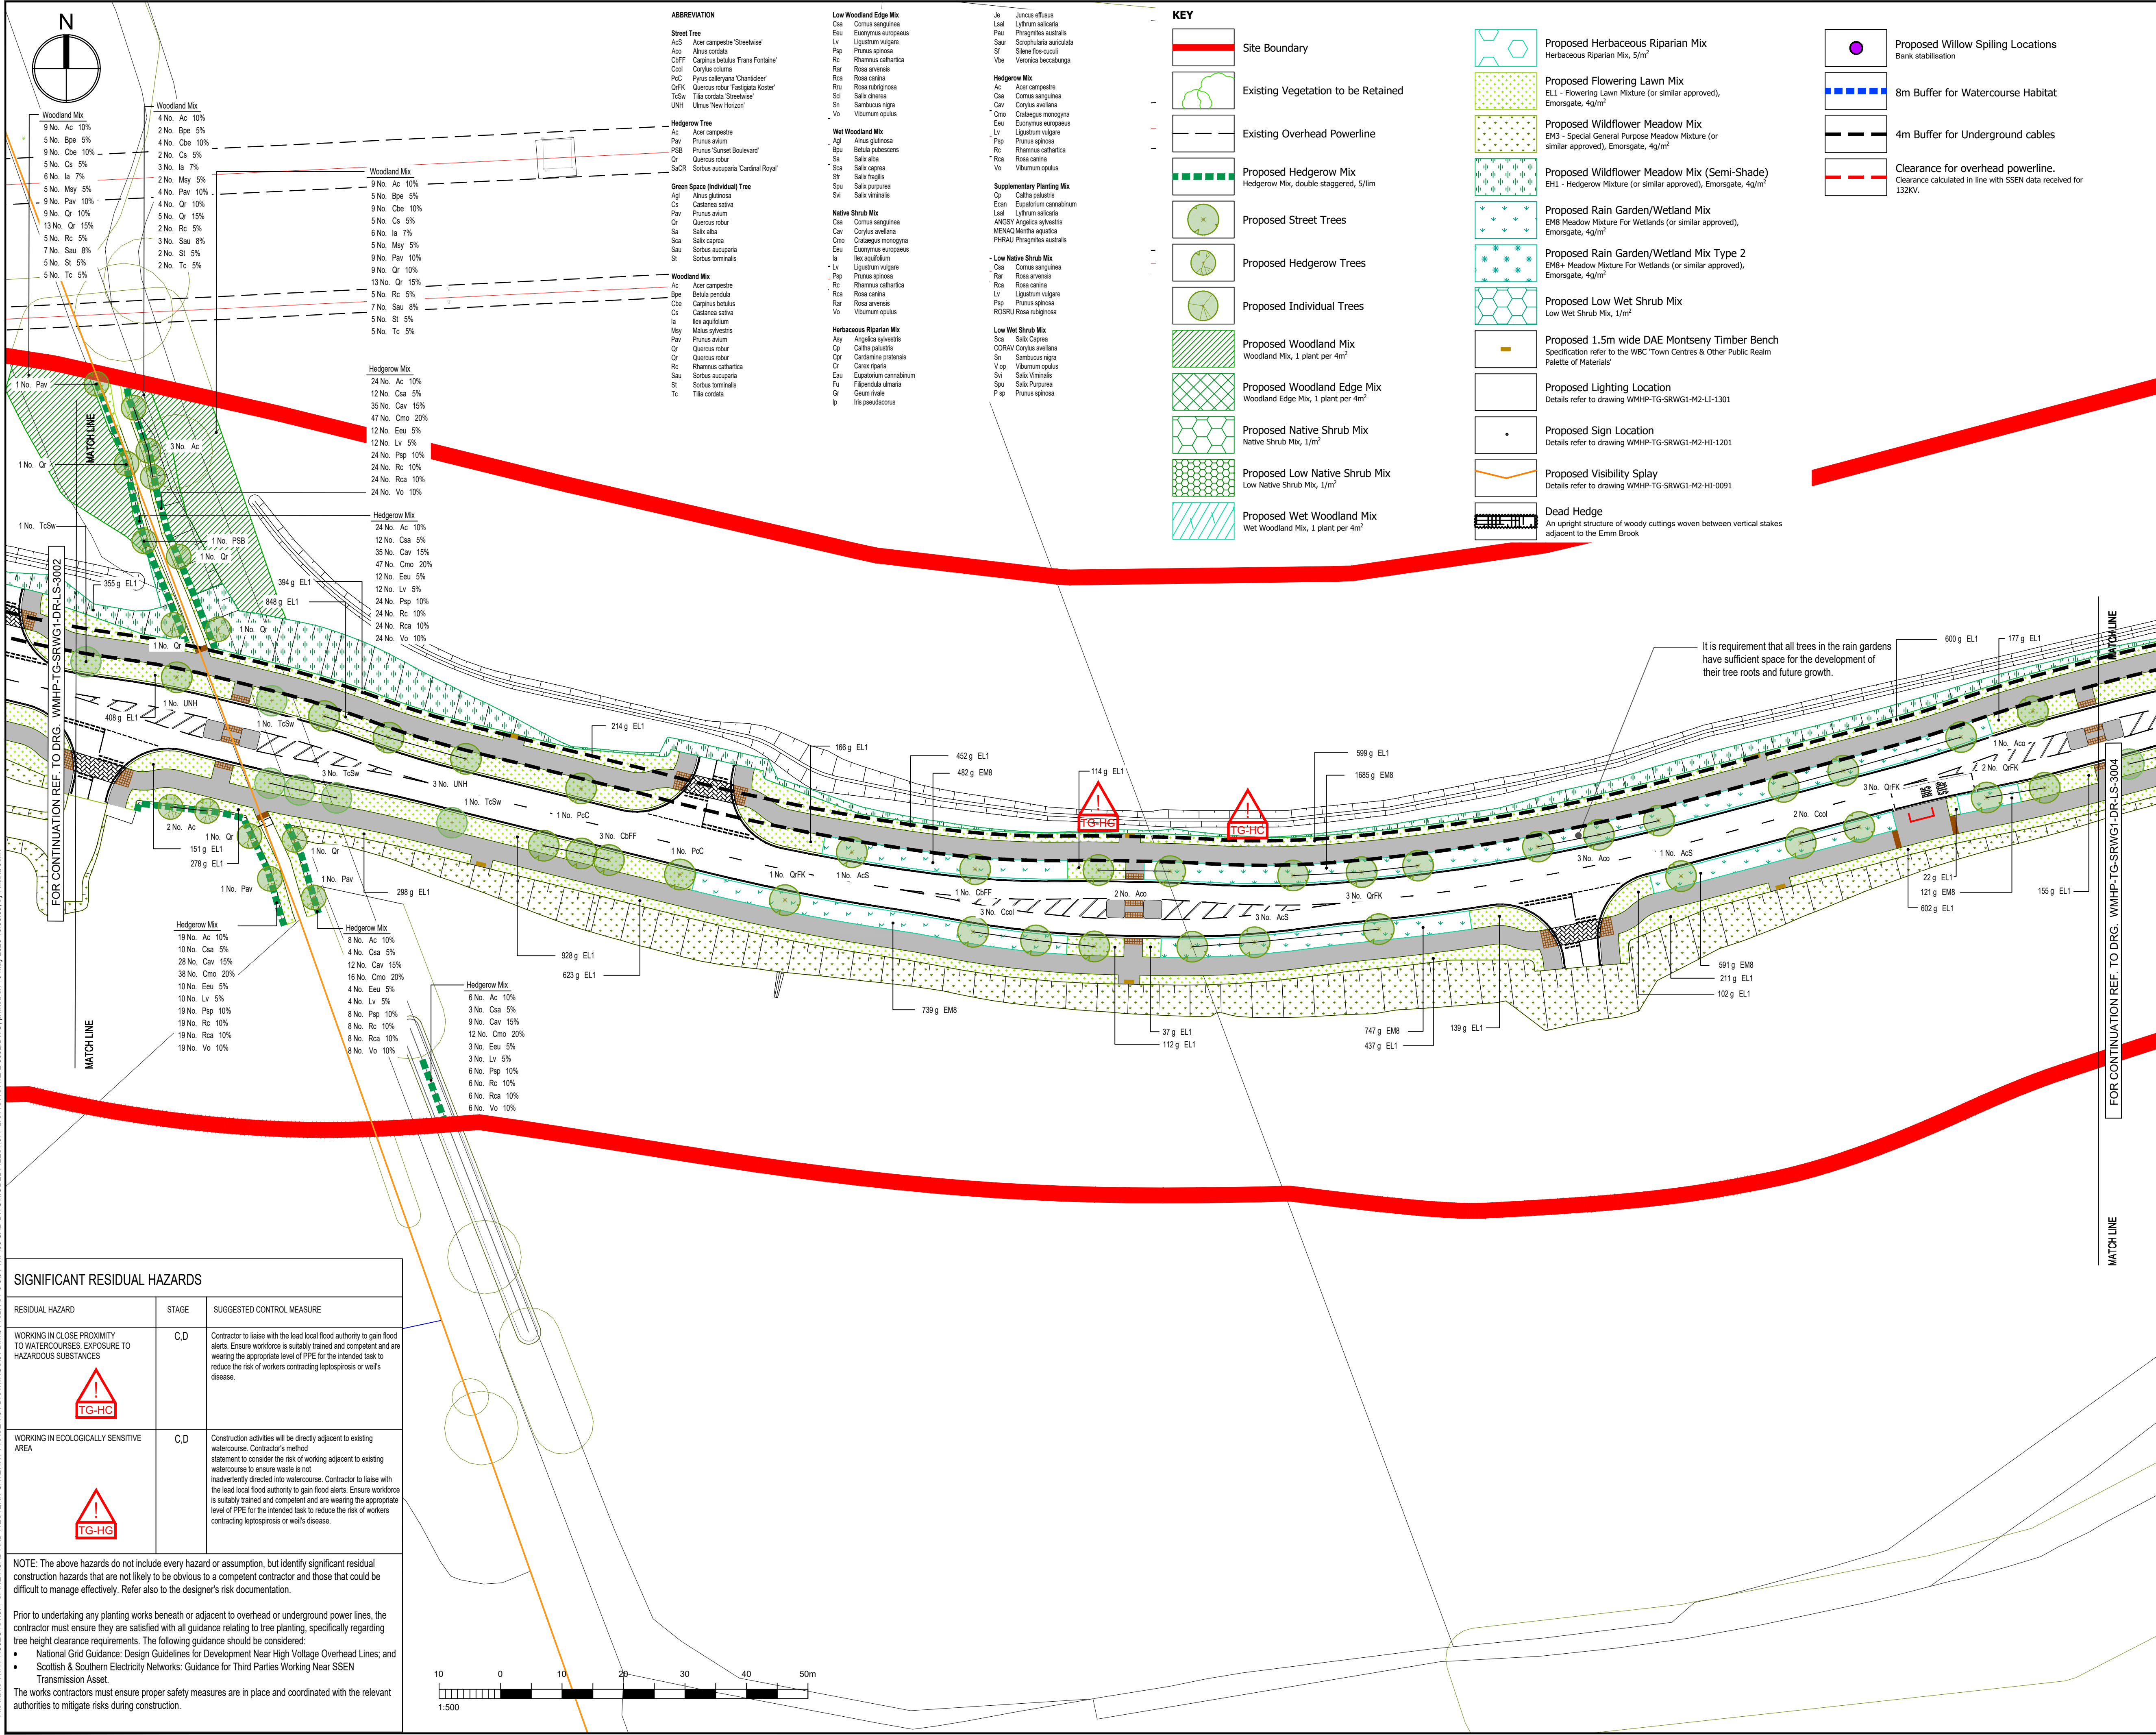

DO NOT SCALE

- TREE PIT CONSTRUCTION DETAILS REFER TO DRAWINGS WMHP-TG-SRWG1-DR-LS-3010 - 3011
- ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.
- ALL LEVELS ARE IN METRES AOD UNLESS NOTED OTHERWISE.
- REFER TO THE 500 SERIES FOR LEVEL INFORMATION
- FENCE DETAILS REFER TO DRAWINGS WMHP-TG-SRWG1-DR-HI-0401 - 0409 AND 0421
- ROAD RESTRAINT SYSTEMS REFER TO DRAWINGS WMHP-TG-SRWG1-DR-HI-0401 - 0409 AND 0421
- ALL NEW AND EXISTING SHRUB PLANTING, TREES AND VEGETATION TO BE PRUNED AND MAINTAINED IN PERPETUITY TO ALLOW FULL VISIBILITY OF ROAD SIGNAGE

SITE LOCATION PLAN

SCALE: 1:25000

REV	DATE	BY	DESCRIPTION	CHK	APP
P10	13/05/2025	NJ	REVISED TO MEET LAP AND STAKE HOLDERS COMMENTS	JC	JC
P09	04/02/2025	NJ	REVISED TO REMOVE TRANSLOCATED TURF	JC	JC
P08	21/01/2025	NJ	REVISED TO REFLECT ECOLOGY COMMENTS	JC	JC

DRAWING STATUS: **FOR REVIEW & COMMENT** **S3**

DESIGNER:

Tony Gee
Consulting Civil, Structural and Geotechnical Engineers

www.tonygee.com

Tony Gee and Partners LLP
Hardy House
140 High Street
Esher, Surrey
KT10 9QJ
Tel: 01372 461600

CLIENT:

WOKINGHAM BOROUGH COUNCIL
Shute End, Wokingham, Berkshire RG40 1BN
Tel: (0118) 974 6000 Web: www.wokingham.gov.uk

PROJECT:


SPINE ROAD AND WESTERN GATEWAY PHASE 1

TITLE:

**HIGHWAYS
SOFT LANDSCAPING PLANTING PLAN**

SHEET 3

SCALE @ A1:	CHECKED:	APPROVED:
1:500	JC	JC
PROJECT NO:	DESIGNED:	DRAWN:
C118047	WM	WM
DRAWING NO:	DATE:	REV:
WMHP-TG-SRWG1-DR-LS-3003	May 25	P10

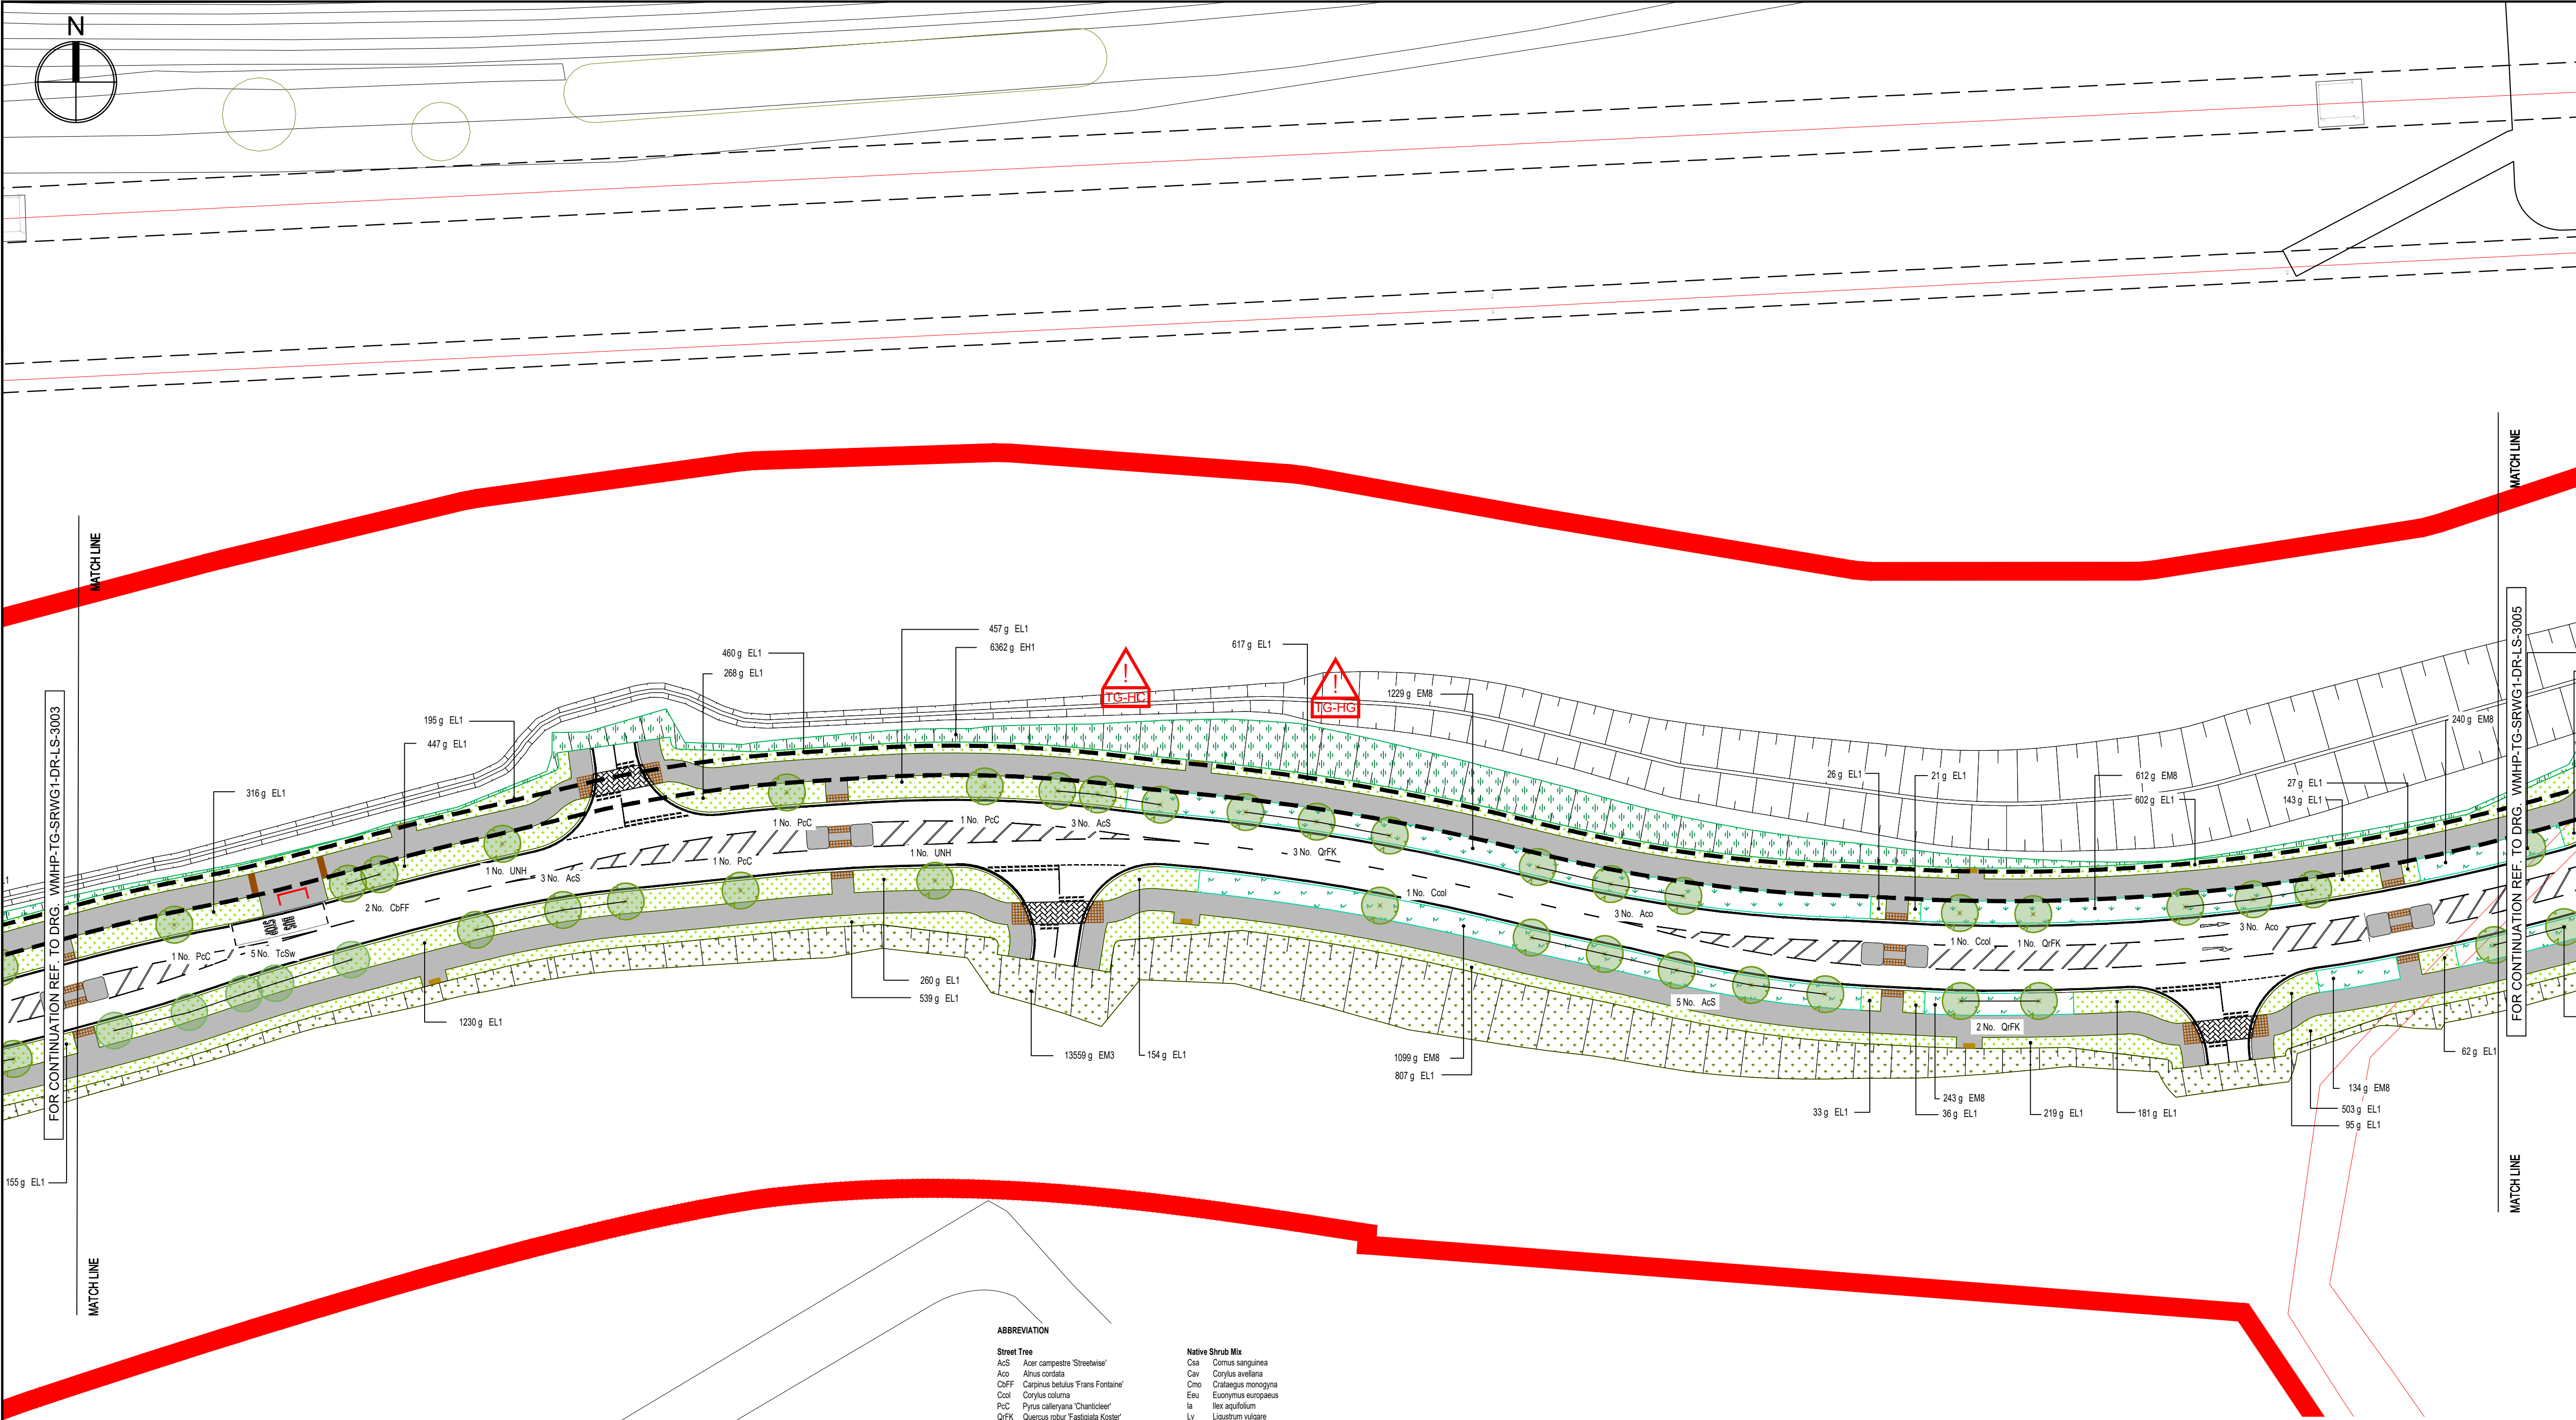

SIGNIFICANT RESIDUAL HAZARDS		
RESIDUAL HAZARD	STAGE	SUGGESTED CONTROL MEASURE
WORKING IN CLOSE PROXIMITY TO WATERCOURSES: EXPOSURE TO HAZARDOUS SUBSTANCES	C,D	Contractor to liaise with the lead local flood authority to gain flood alerts. Ensure workforce is suitably trained and competent and are wearing the appropriate level of PPE for the intended task to reduce the risk of workers contracting leptospirosis or well's disease.
WORKING IN ECOLOGICALLY SENSITIVE AREA	C,D	Construction activities will be directly adjacent to existing watercourse. Contractor's method statement to consider the risk of working adjacent to existing watercourse to ensure waste is not inadvertently directed into watercourse. Contractor to liaise with the lead local flood authority to gain flood alerts. Ensure workforce is suitably trained and competent and are wearing the appropriate level of PPE for the intended task to reduce the risk of workers contracting leptospirosis or well's disease.
NOTE: The above hazards do not include every hazard or assumption, but identify significant residual construction hazards that are not likely to be obvious to a competent contractor and those that could be difficult to manage effectively. Refer also to the designer's risk documentation.		
Prior to undertaking any planting works beneath or adjacent to overhead or underground power lines, the contractor must ensure they are satisfied with all guidance relating to tree planting, specifically regarding tree height clearance requirements. The following guidance should be considered:		
• National Grid Guidance: Design Guidelines for Development Near High Voltage Overhead Lines; and		
• Scottish & Southern Electricity Networks: Guidance for Third Parties Working Near SSN Transmission Asset.		
The works contractors must ensure proper safety measures are in place and coordinated with the relevant authorities to mitigate risks during construction.		

File name: Y:\1 PROJECTS\SPINE ROAD AND WESTERN GATEWAY PHASE 1\04 DRAWINGS\01 BIM\01 RIBA ST 0-301 WIP\03 CAD DWG\MODEL FILES\4977-LAN-XX-M2-L-0002.DWG, printed on 18 May 2025 16:36:37 by Nikitha John

ABBREVIATION	
Street Tree	
AcS	Acer campestre 'Streetwise'
Aco	Alnus cordata
ChFF	Carpinus betulus 'Frans Fontaine'
Coal	Corylus colurna
PoC	Pinus caleyana 'Chanticleer'
QrFK	Quercus robur 'Fastigiate Koster'
TcSw	Tilia cordata 'Streetwise'
UNH	Ulmus New Horizon'
Hedgerow Tree	
Ac	Acer campestre
Pav	Prunus avium
PSB	Prunus 'Sunset Boulevard'
SiCo	Sorbus aucuparia 'Cardinal Royal'
Green Space (Individual) Tree	
Ag	Alnus glutinosa
Co	Castanea sativa
Pav	Prunus avium
Qr	Quercus robur
Sal	Salix alba
Sca	Salix caprea
Sau	Sorbus aucuparia
St	Sorbus torminalis
Woodland Mix	
Ac	Acer campestre
Bpe	Betula pendula
Ch	Carpinus betulus
Co	Castanea sativa
Eu	Eurostylis europaeus
La	Liquidum vulgare
May	Malus sylvestris
Pav	Prunus avium
Qr	Quercus robur
Qr	Quercus robur
Rc	Rhamnus cathartica
Sau	Sorbus aucuparia
St	Sorbus torminalis
Tc	Tilia cordata
Low Woodland Edge Mix	
Coa	Cornus sanguinea
Eu	Eurostylis europaeus
Lv	Liquidum vulgare
Psp	Prunus spinosa
Rc	Rhamnus cathartica
Rca	Rosa canina
Rru	Rosa rubiginosa
Sci	Salix caprea
Sh	Sambucus nigra
Svi	Salix viminalis
Wet Woodland Mix	
Ag	Alnus glutinosa
Bpu	Betula pubescens
Sh	Salix alba
Sca	Salix caprea
Sh	Sambucus nigra
Svi	Salix viminalis
Native Shrub Mix	
Coa	Cornus sanguinea
Co	Cornus avellana
Cav	Corylus avellana
Eu	Eurostylis europaeus
La	Liquidum vulgare
Lv	Liquidum vulgare
Psp	Prunus spinosa
Rc	Rhamnus cathartica
Rca	Rosa canina
Rru	Rosa rubiginosa
Sci	Salix caprea
Sh	Sambucus nigra
Svi	Salix viminalis
Supplementary Planting Mix	
Co	Cornus sanguinea
Coa	Cornus avellana
Cav	Corylus avellana
Eu	Eurostylis europaeus
La	Liquidum vulgare
Lv	Liquidum vulgare
Psp	Prunus spinosa
Rc	Rhamnus cathartica
Rca	Rosa canina
Rru	Rosa rubiginosa
Sci	Salix caprea
Sh	Sambucus nigra
Svi	Salix viminalis
Low Native Shrub Mix	
Coa	Cornus sanguinea
Co	Cornus avellana
Cav	Corylus avellana
Eu	Eurostylis europaeus
La	Liquidum vulgare
Lv	Liquidum vulgare
Psp	Prunus spinosa
Rc	Rhamnus cathartica
Rca	Rosa canina
Rru	Rosa rubiginosa
Sci	Salix caprea
Sh	Sambucus nigra
Svi	Salix viminalis
Dead Hedge	
Co	Cornus sanguinea
Coa	Cornus avellana
Cav	Corylus avellana
Eu	Eurostylis europaeus
La	Liquidum vulgare
Lv	Liquidum vulgare
Psp	Prunus spinosa
Rc	Rhamnus cathartica
Rca	Rosa canina
Rru	Rosa rubiginosa
Sci	Salix caprea
Sh	Sambucus nigra
Svi	Salix viminalis

KEY	
	Site Boundary
	Existing Vegetation to be Retained
	Existing Overhead Powerline
	Proposed Hedgerow Mix
	Proposed Street Trees
	Proposed Hedgerow Trees
	Proposed Individual Trees
	Proposed Woodland Mix
	Proposed Woodland Edge Mix
	Proposed Native Shrub Mix
	Proposed Low Native Shrub Mix
	Proposed Wet Woodland Mix

	Proposed Herbaceous Riparian Mix
	Proposed Flowering Lawn Mix
	Proposed Wildflower Meadow Mix
	Proposed Wildflower Meadow Mix (Semi-Shade)
	Proposed Rain Garden/Wetland Mix
	Proposed Rain Garden/Wetland Mix Type 2
	Proposed Low Wet Shrub Mix
	Proposed 1.5m wide DAE Montseny Timber Bench
	Proposed Lighting Location
	Proposed Sign Location
	Proposed Visibility Splay
	Dead Hedge

	Proposed Willow Spilling Locations
	8m Buffer for Watercourse Habitat
	4m Buffer for Underground cables
	Clearance for overhead powerline.

DO NOT SCALE

- TREE PIT CONSTRUCTION DETAILS REFER TO DRAWINGS WMHP-TG-SRWG1-DR-LS-3010 - 3011
- ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.
- ALL LEVELS ARE IN METRES AOD UNLESS NOTED OTHERWISE.
- REFER TO THE 500 SERIES FOR LEVEL INFORMATION
- FENCE DETAILS REFER TO DRAWINGS WMHP-TG-SRWG1-DR-LS-3001 - 3009
- ROAD RESTRAINT SYSTEMS REFER TO DRAWINGS WMHP-TG-SRWG1-DR-HI-0401 - 0409 AND 0421
- ALL NEW AND EXISTING SHRUB PLANTING, TREES AND VEGETATION TO BE PRUNED AND MAINTAINED IN PERPETUITY TO ALLOW FULL VISIBILITY OF ROAD SIGNAGE

SITE LOCATION PLAN

SCALE: 1:25000

KEY PLAN

SPINE ROAD AND WESTERN GATEWAY

REV	DATE	BY	DESCRIPTION	CHK	APP
P10	13/05/2025	NJ	REVISED TO MEET LAP AND STAKE HOLDERS COMMENTS	JC	JC
P09	04/02/2025	NJ	REVISED TO REMOVE TRANSLATED TURF	JC	JC
P08	21/01/2025	NJ	REVISED TO REFLECT ECOLOGY COMMENTS	JC	JC

DRAWING STATUS: **FOR REVIEW & COMMENT** **S3**

DESIGNER:

Tony Gee
Consulting Civil, Structural and Geotechnical Engineers

Tony Gee and Partners LLP
Hardy House
140 High Street
Esher, Surrey
KT10 9JQ
Tel: 01372 461600

www.tonygee.com

CLIENT:

WOKINGHAM BOROUGH COUNCIL

Shute End, Wokingham, Berkshire RG40 1BN
Tel: (0118) 974 6000 Web: www.wokingham.gov.uk

PROJECT:

SPINE ROAD AND WESTERN GATEWAY PHASE 1

TITLE:

HIGHWAYS
SOFT LANDSCAPING PLANTING PLAN

SHEET 4


SCALE AT A1:	CHECKED:	APPROVED:
1:500	JC	JC

PROJECT NO:	DESIGNED:	DRAWN:	DATE:
C118047	WM	WM	May 25


DRAWING No: **WMHP-TG-SRWG1-DR-LS-3004**

REV: **P10**

10 0 10 20 30 40 50m
1:500

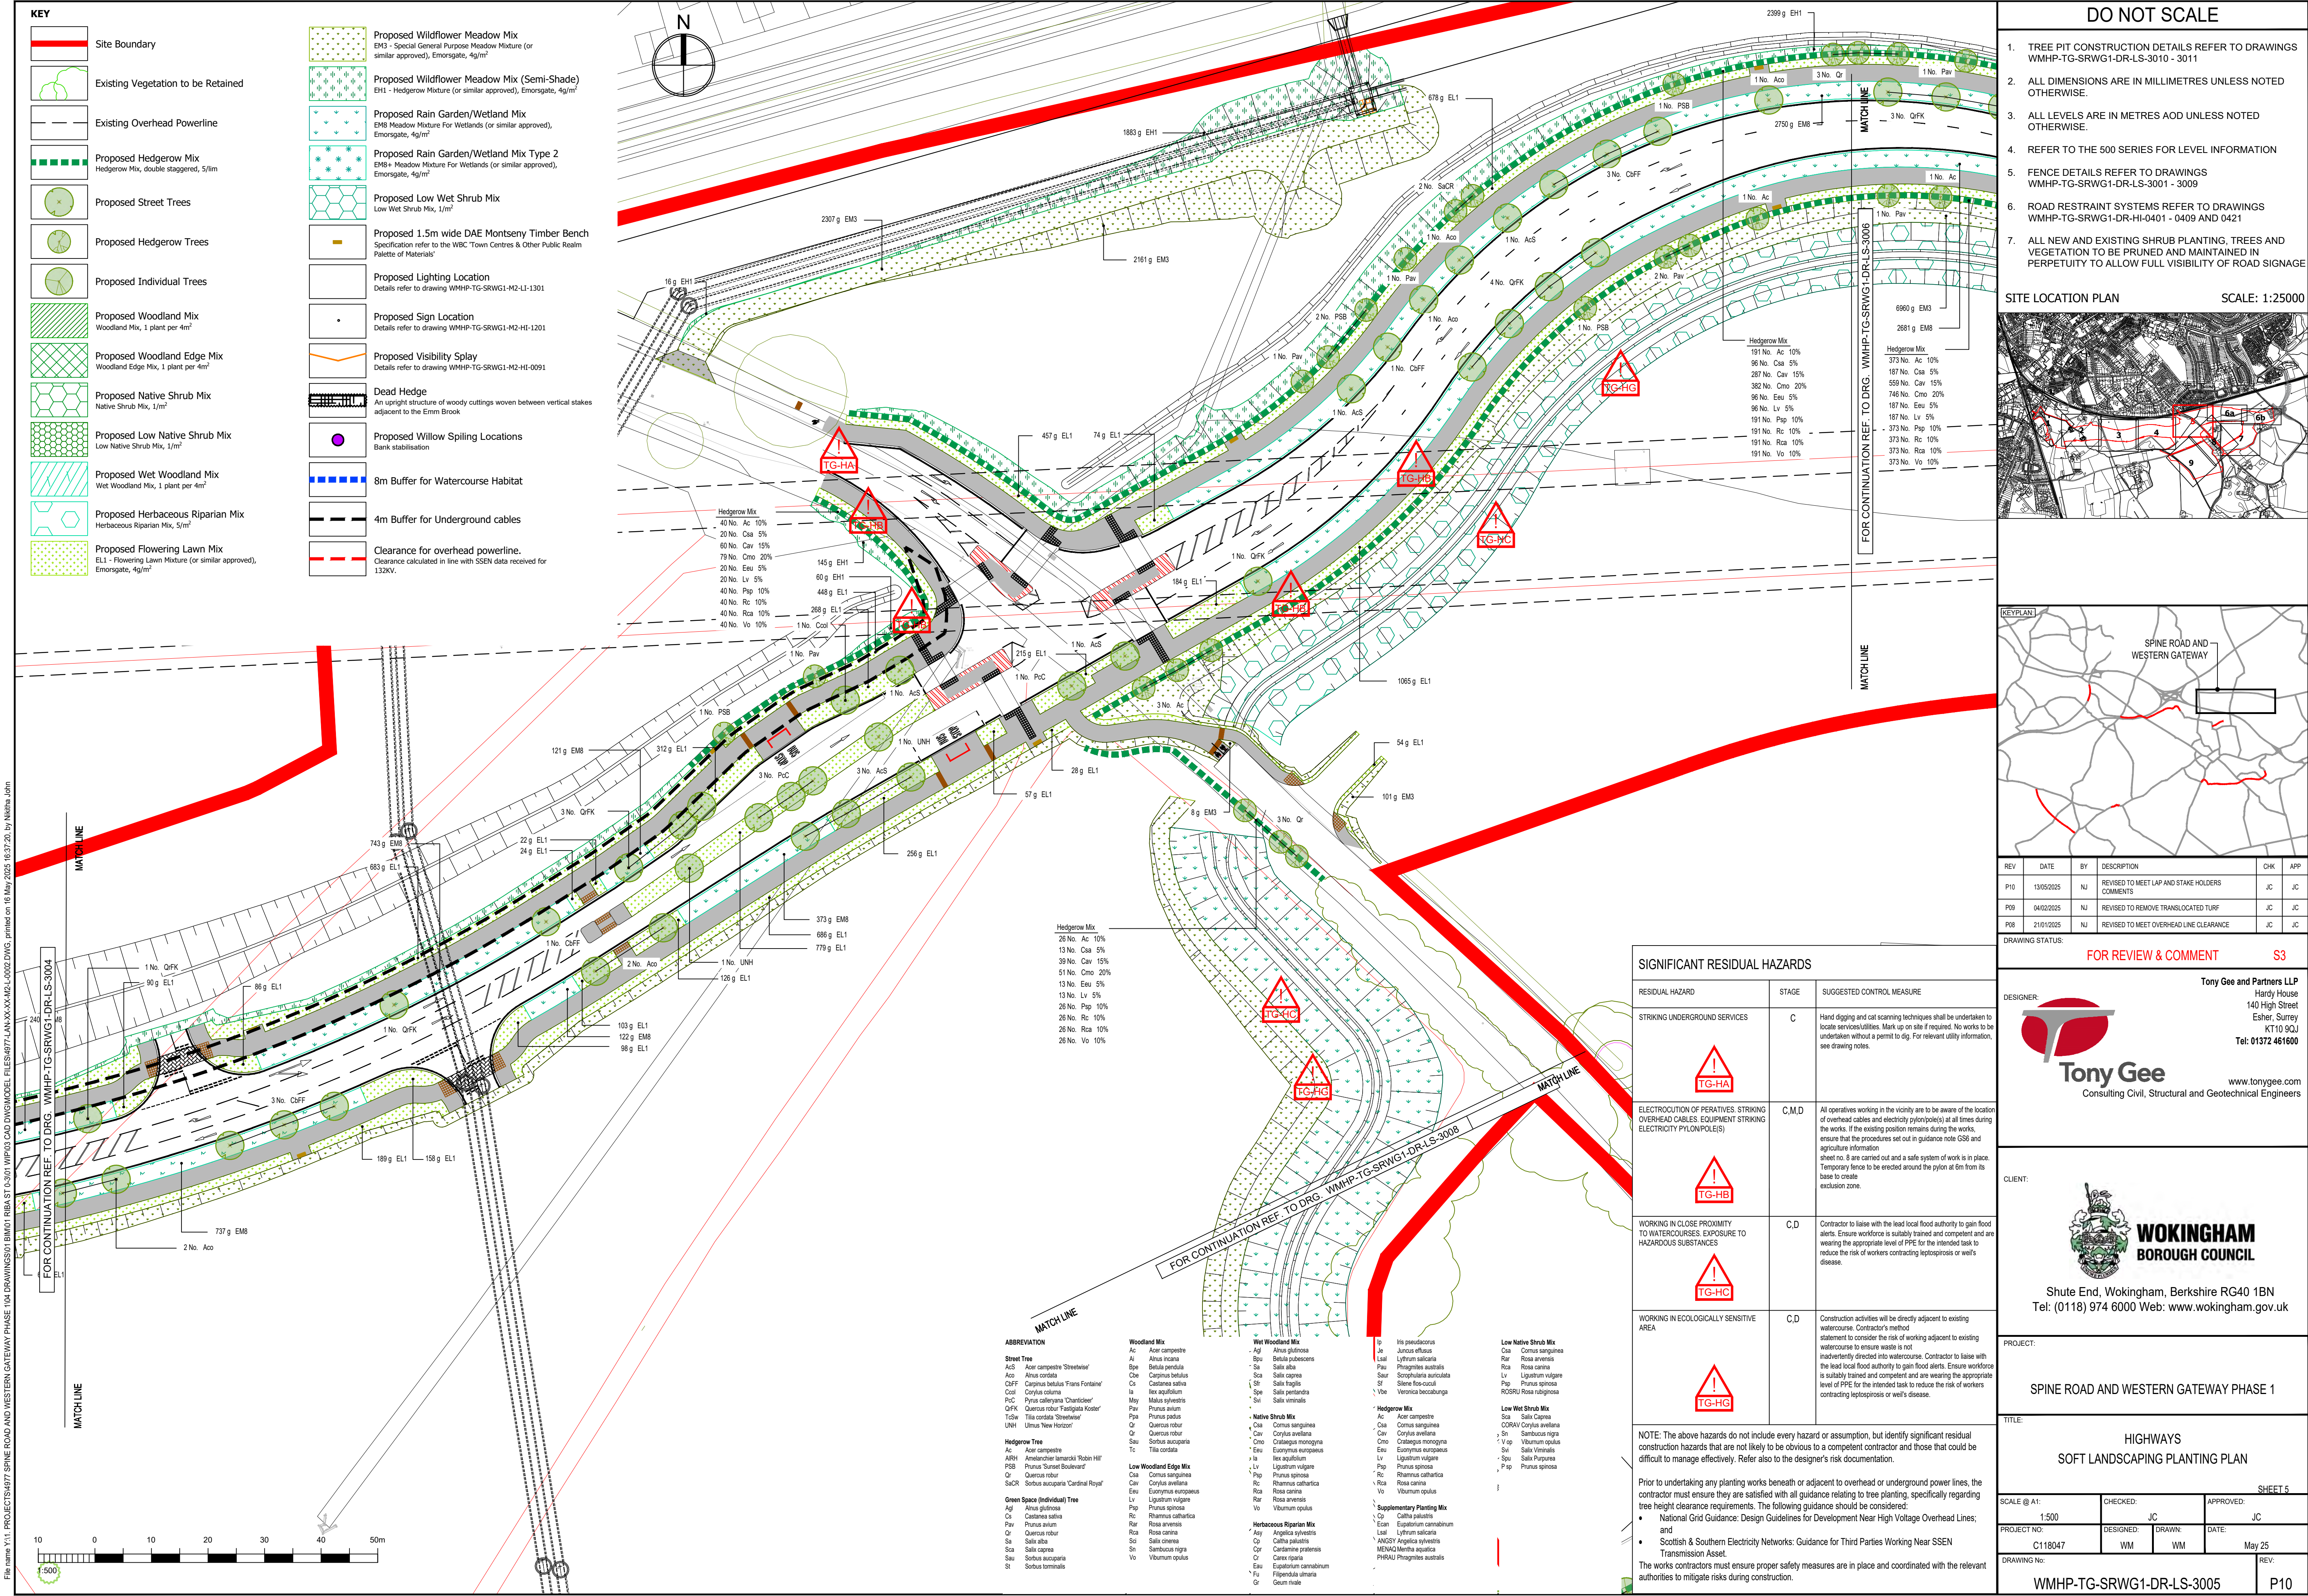

File name: Y:\1. PROJECTS\W7 SPINE ROAD AND WESTERN GATEWAY PHASE 1\DRAWINGS\01 BIM\01 RBA ST 0-301 WIP\03 CAD Dwg\MODEL FILES\877-LAN-XX-M2-L1-3002.DWG, printed on 16 May 2025 16:38:01 by Nithia John

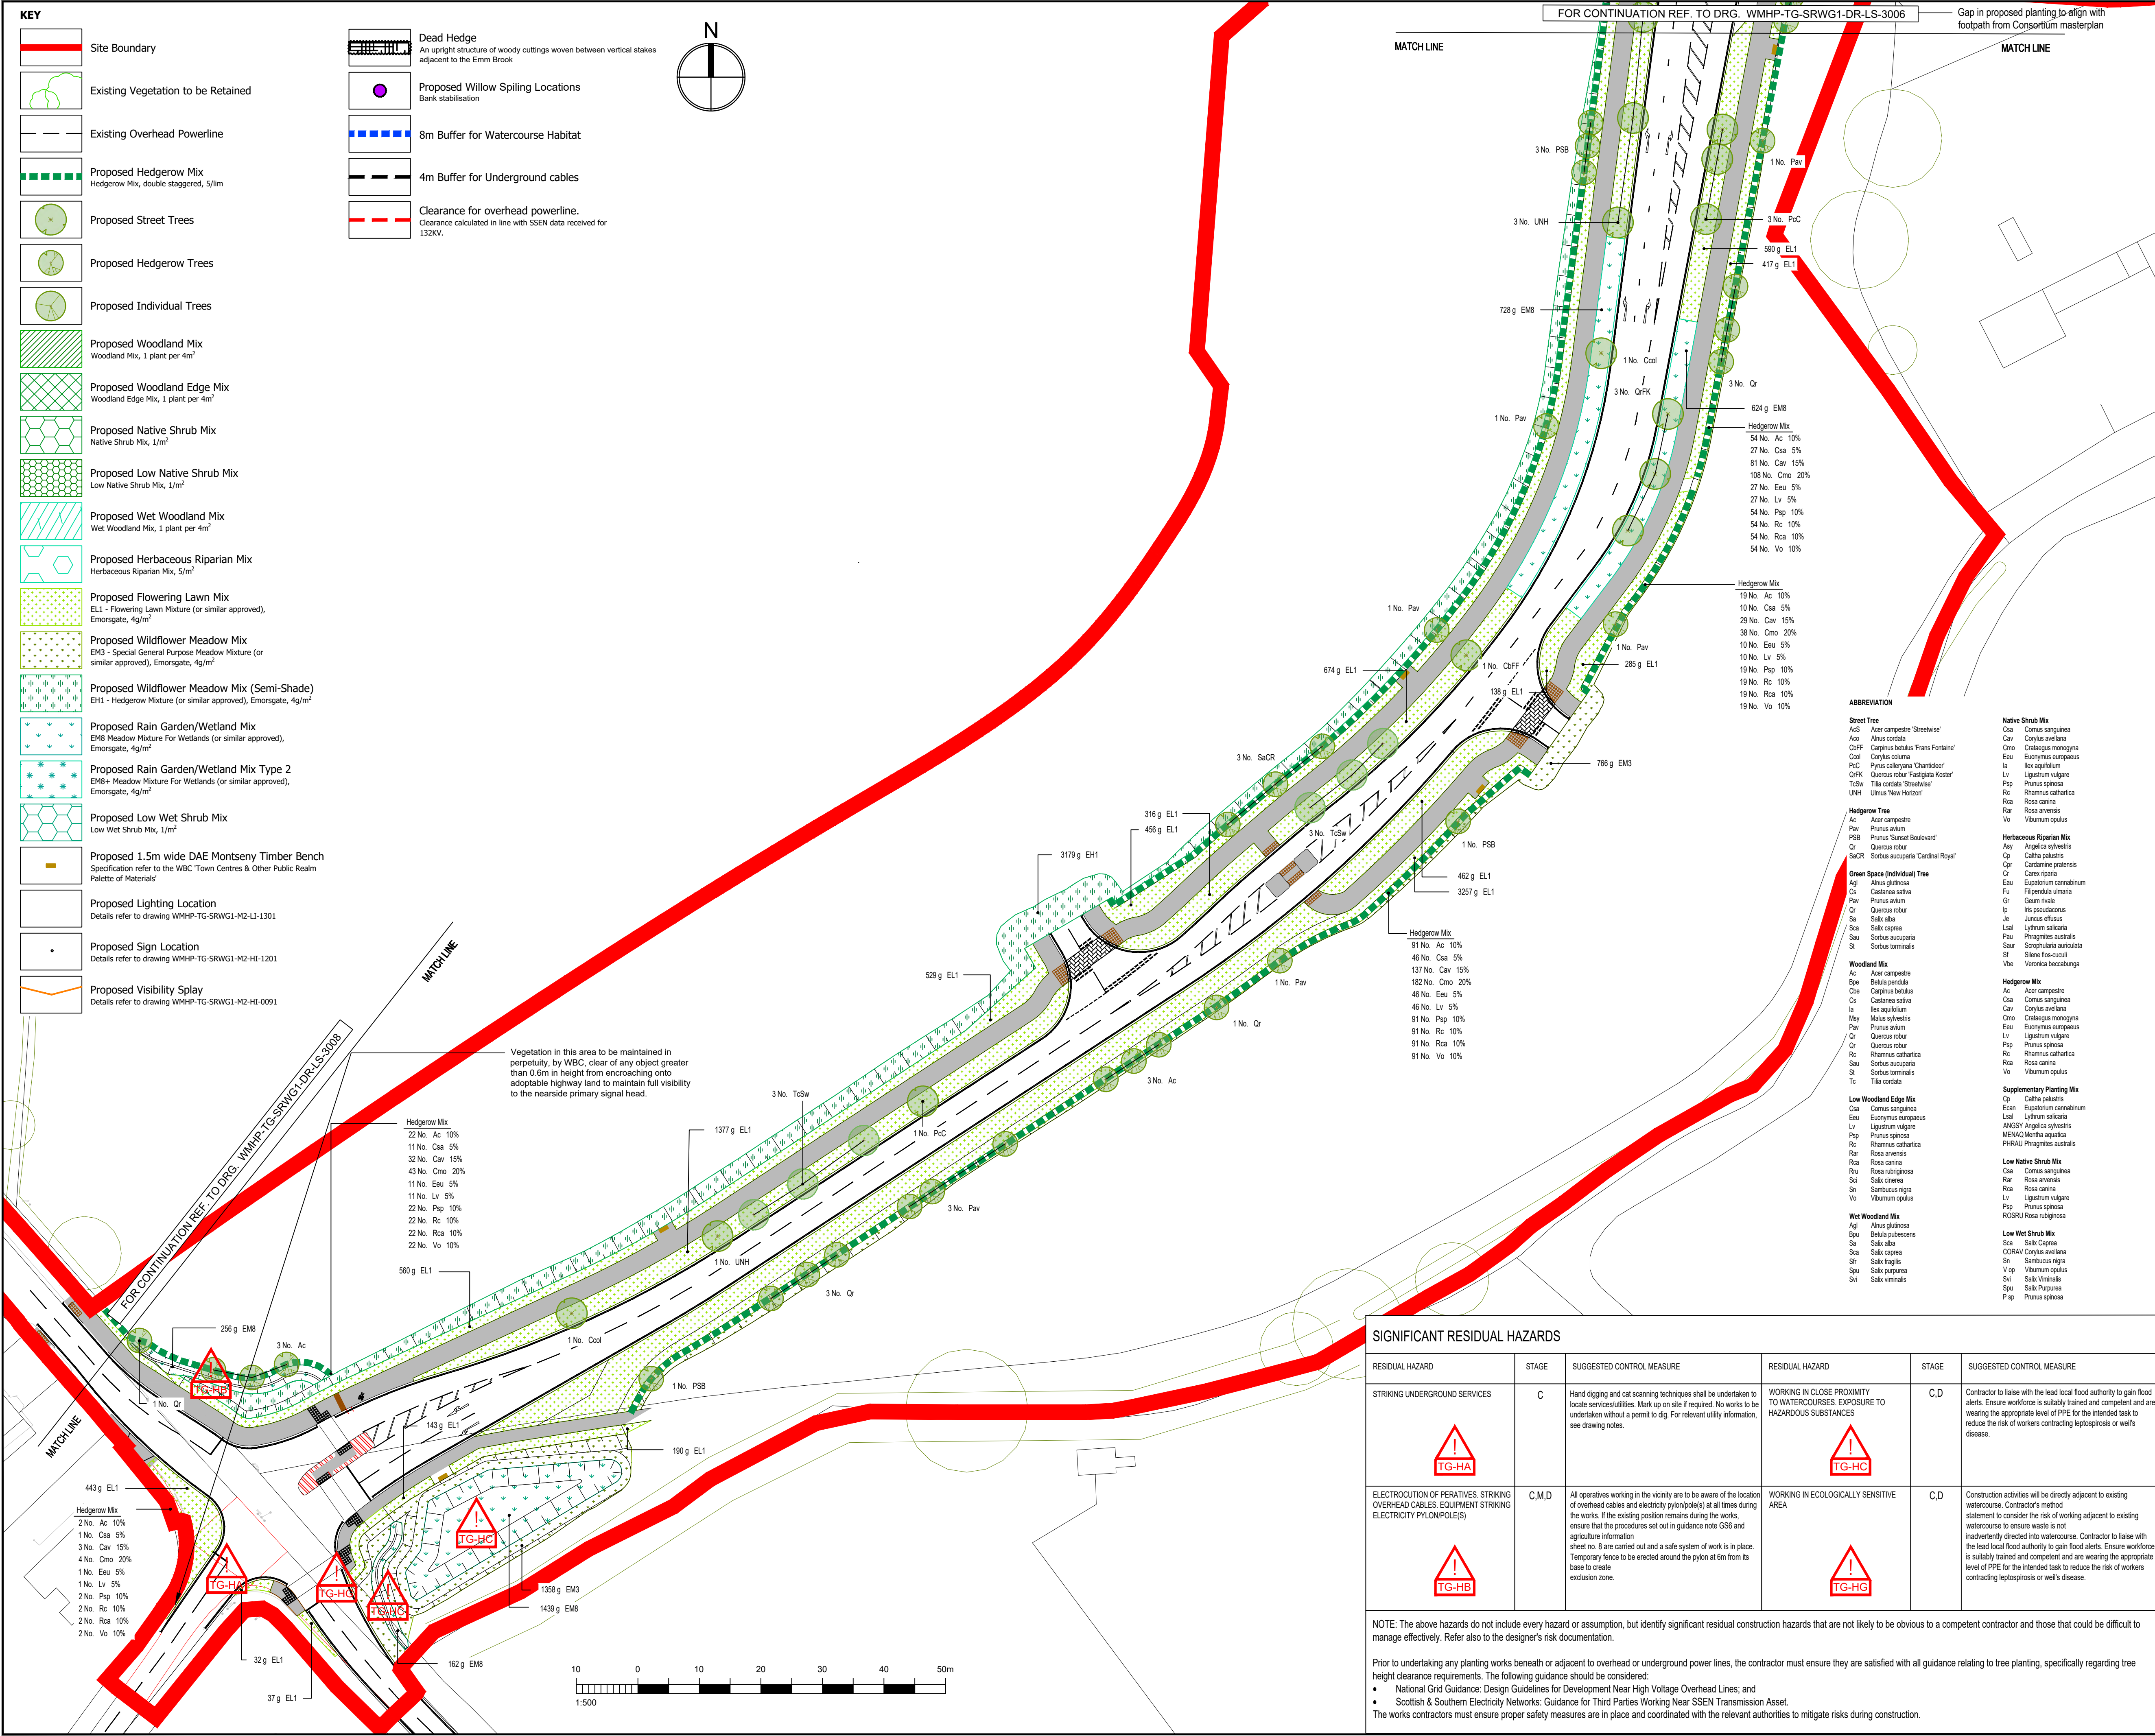

DO NOT SCALE

- TREE PIT CONSTRUCTION DETAILS REFER TO DRAWINGS WMHP-TG-SRWG1-DR-LS-3010 - 3011
- ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.
- ALL LEVELS ARE IN METRES AOD UNLESS NOTED OTHERWISE.
- REFER TO THE 500 SERIES FOR LEVEL INFORMATION
- FENCE DETAILS REFER TO DRAWINGS WMHP-TG-SRWG1-DR-LS-3001 - 3009
- ROAD RESTRAINT SYSTEMS REFER TO DRAWINGS WMHP-TG-SRWG1-DR-HI-0401 - 0409 AND 0421
- ALL NEW AND EXISTING SHRUB PLANTING, TREES AND VEGETATION TO BE PRUNED AND MAINTAINED IN PERPETUITY TO ALLOW FULL VISIBILITY OF ROAD SIGNAGE

SITE LOCATION PLAN

SCALE: 1:25000

KEYPLAN

SPINE ROAD AND WESTERN GATEWAY

REV	DATE	BY	DESCRIPTION	CHK	APP
P10	13/05/2025	NJ	REVISED TO MEET LAP AND STAKE HOLDERS COMMENTS	JC	JC
P09	04/02/2025	NJ	REVISED TO REMOVE TRANSLOCATED TURF	JC	JC
P08	21/01/2025	NJ	REVISED TO REFLECT ECOLOGIST COMMENTS	JC	JC

DRAWING STATUS:

FOR REVIEW & COMMENT **S3**

DESIGNER:

Tony Gee
Consulting Civil, Structural and Geotechnical Engineers

Tony Gee and Partners LLP
Hardy House
140 High Street
Essex, Surrey
KT10 9JL
Tel: 01372 461600
www.tonygee.com

CLIENT:

WOKINGHAM BOROUGH COUNCIL
Shute End, Wokingham, Berkshire RG40 1BN
Tel: (0118) 974 6000 Web: www.wokingham.gov.uk

PROJECT:

SPINE ROAD AND WESTERN GATEWAY PHASE 1

TITLE:

HIGHWAYS
SOFT LANDSCAPING PLANTING PLAN

SHEET 7


SCALE @ A1:	CHECKED:	APPROVED:
1:500	JC	JC

PROJECT NO:	DESIGNED:	DRAWN:	DATE:
C118047	WM	WM	May 25

DRAWING No:	REV:
WMHP-TG-SRWG1-DR-LS-3007	P10

SIGNIFICANT RESIDUAL HAZARDS					
RESIDUAL HAZARD	STAGE	SUGGESTED CONTROL MEASURE	RESIDUAL HAZARD	STAGE	SUGGESTED CONTROL MEASURE
STRIKING UNDERGROUND SERVICES	C	Hand digging and cat scanning techniques shall be undertaken to locate services/utilities. Mark up on site if required. No works to be undertaken without a permit to dig. For relevant utility information, see drawing notes.	WORKING IN CLOSE PROXIMITY TO WATERCOURSES. EXPOSURE TO HAZARDOUS SUBSTANCES	C,D	Contractor to liaise with the lead local flood authority to gain flood alerts. Ensure workforce is suitably trained and competent and are wearing the appropriate level of PPE for the intended task to reduce the risk of workers contracting leptospirosis or well's disease.
ELECTROCUTION OF PERATIVES. STRIKING OVERHEAD CABLES. EQUIPMENT STRIKING ELECTRICITY PYLON/POLE(S)	C,M,D	All operatives working in the vicinity are to be aware of the location of overhead cables and electricity pylon/pole(s) at all times during the works. If the existing position remains during the works, ensure that the procedures set out in guidance note GS6 and agriculture information sheet no. 8 are carried out and a safe system of work is in place. Temporary fence to be erected around the pylon at 6m from its base to create exclusion zone.	WORKING IN ECOLOGICALLY SENSITIVE AREA	C,D	Construction activities will be directly adjacent to existing watercourse. Contractor's method statement to consider the risk of working adjacent to existing watercourse to ensure waste is not inadvertently directed into watercourse. Contractor to liaise with the lead local flood authority to gain flood alerts. Ensure workforce is suitably trained and competent and are wearing the appropriate level of PPE for the intended task to reduce the risk of workers contracting leptospirosis or well's disease.
NOTE: The above hazards do not include every hazard or assumption, but identify significant residual construction hazards that are not likely to be obvious to a competent contractor and those that could be difficult to manage effectively. Refer also to the designer's risk documentation.					
Prior to undertaking any planting works beneath or adjacent to overhead or underground power lines, the contractor must ensure they are satisfied with all guidance relating to tree planting, specifically regarding tree height clearance requirements. The following guidance should be considered: - National Grid Guidance: Design Guidelines for Development Near High Voltage Overhead Lines; and - Scottish & Southern Electricity Networks: Guidance for Third Parties Working Near SSN Transmission Asset. The works contractors must ensure proper safety measures are in place and coordinated with the relevant authorities to mitigate risks during construction.					

SIGNIFICANT RESIDUAL HAZARDS		
RESIDUAL HAZARD	STAGE	SUGGESTED CONTROL MEASURE
WORKING IN CLOSE PROXIMITY TO WATERCOURSES. EXPOSURE TO HAZARDOUS SUBSTANCES 	C,D	Contractor to liaise with the lead local flood authority to gain flood alerts. Ensure workforce is suitably trained and competent and are wearing the appropriate level of PPE for the intended task to reduce the risk of workers contracting leptospirosis or well's disease.
WORKING IN ECOLOGICALLY SENSITIVE AREA 	C,D	Construction activities will be directly adjacent to existing watercourse. Contractor's method statement to consider the risk of working adjacent to existing watercourse to ensure waste is not inadvertently directed into watercourse. Contractor to liaise with the lead local flood authority to gain flood alerts. Ensure workforce is suitably trained and competent and are wearing the appropriate level of PPE for the intended task to reduce the risk of workers contracting leptospirosis or well's disease.
NOTE: The above hazards do not include every hazard or assumption, but identify significant residual construction hazards that are not likely to be obvious to a competent contractor and those that could be difficult to manage effectively. Refer also to the designer's risk documentation.		
Prior to undertaking any planting works beneath or adjacent to overhead or underground power lines, the contractor must ensure they are satisfied with all guidance relating to tree planting, specifically regarding tree height clearance requirements. The following guidance should be considered: - National Grid Guidance: Design Guidelines for Development Near High Voltage Overhead Lines; and - Scottish & Southern Electricity Networks: Guidance for Third Parties Working Near SSEN Transmission Asset. The works contractors must ensure proper safety measures are in place and coordinated with the relevant authorities to mitigate risks during construction.		

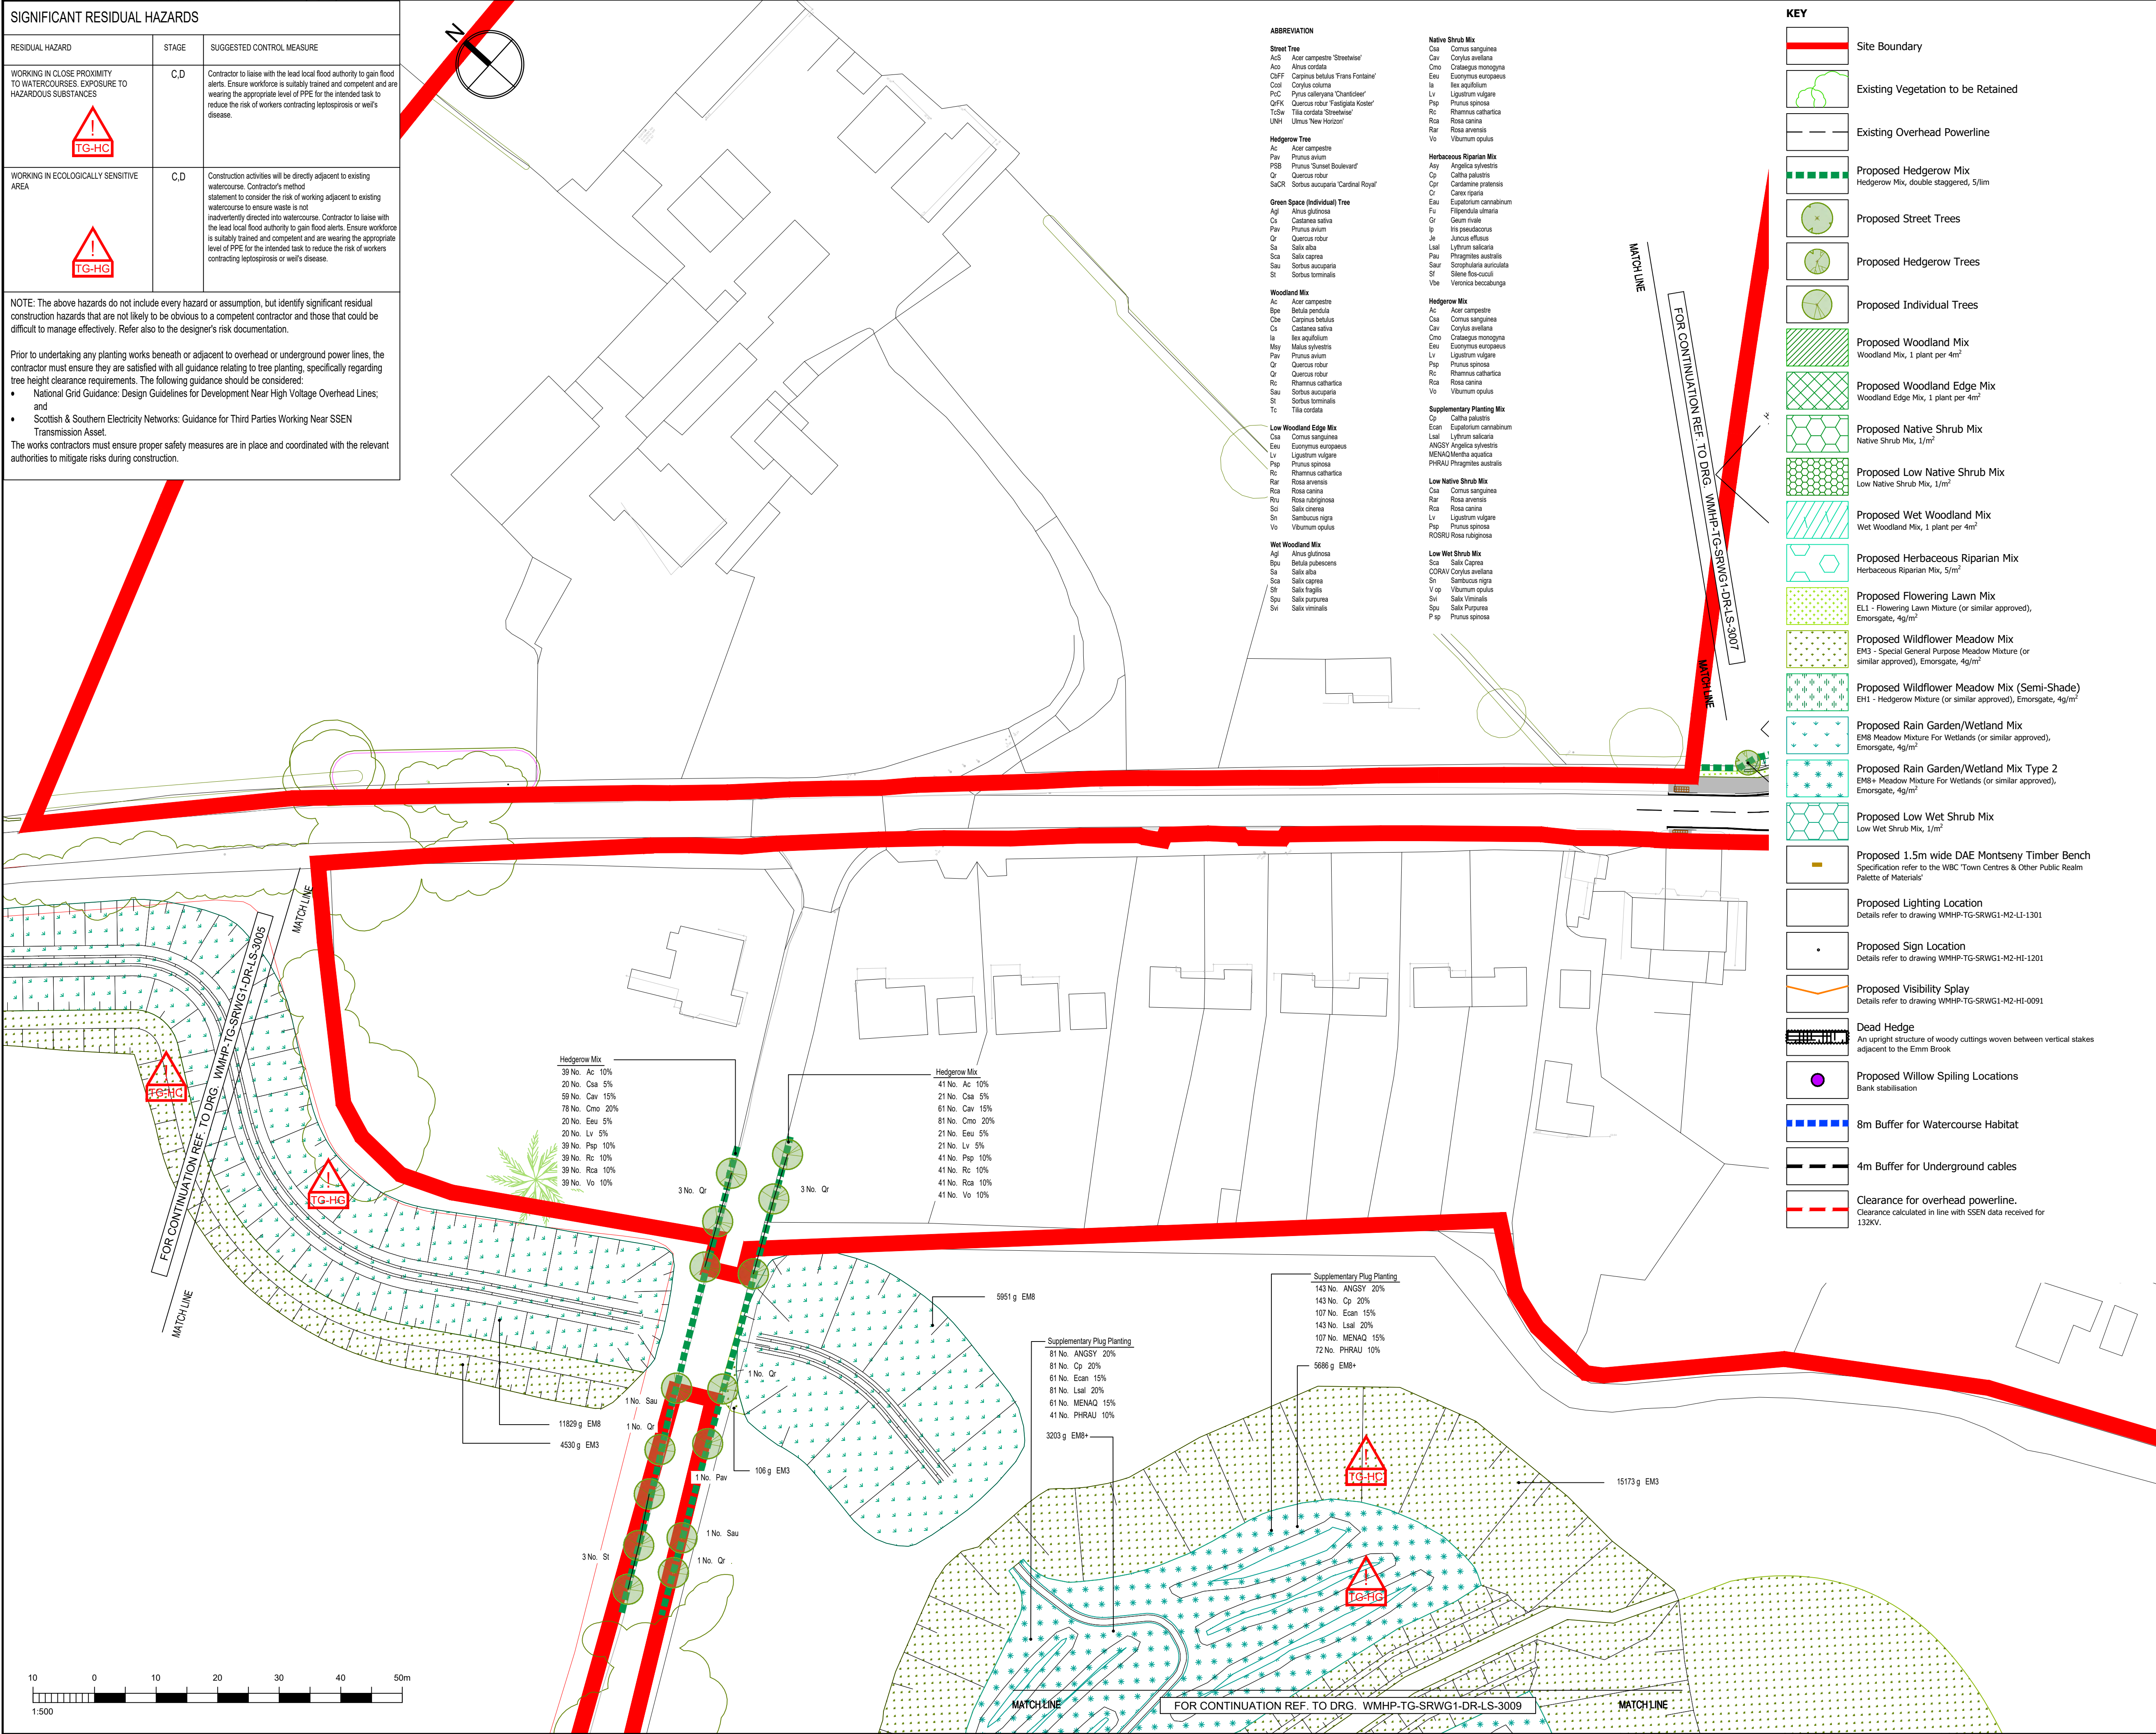

ABBREVIATION

Street Tree
AcS Acer campestre 'Streetwise'
Aco Anus cordata
C2FF Carpinus betulus 'Frana Fontaine'
Coc Corylus colurna
Pdc Prunus caryocarpa 'Chantidier'
QPK Quercus robur 'Fastigiate Koster'
TcW Tilia cordata 'Streetwise'
UNH Ulmus 'New Horizon'

Hedgerow Tree
Ac Acer campestre
Pav Prunus avium
PSB Prunus 'Sunset Boulevard'
Qr Quercus robur
SaCR Sorbus aucuparia 'Cardinal Royal'

Green Space (Individual) Tree
Ag Alnus glutinosa
Ca Castanea sativa
Pav Prunus avium
Qr Quercus robur
Sa Salix alba
Sca Salix caprea
Sau Sorbus aucuparia
St Sorbus torminalis

Woodland Mix
Ac Acer campestre
Bpe Betula pendula
Csa Carpinus betulus
Csa Castanea sativa
Ia Ilex aquifolium
Maj Malus sylvestris
Pav Prunus avium
Qr Quercus robur
Qr Quercus robur
Rca Rhamnus cathartica
Rca Rosa carolina
St Tilia cordata

Low Woodland Edge Mix
Csa Carpinus betulus
Euc Eucalyptus europaeus
Lvg Ligustrum vulgare
Psp Prunus spinosa
Rca Rhamnus cathartica
Rca Rosa carolina
Rca Rosa rubiginosa
Sca Salix caprea
Sca Sambucus nigra
Vob Viburnum opulus

Wet Woodland Mix
Ag Alnus glutinosa
Bpe Betula pubescens
Sa Salix alba
Sca Salix caprea
Sv Salix viminalis

Native Shrub Mix

Csa Cornus sanguinea
Cav Corylus avellana
Cmo Crataegus monogyna
Euc Eucalyptus europaeus
Ia Ilex aquifolium
Lvg Ligustrum vulgare
Psp Prunus spinosa
Rca Rhamnus cathartica
Rca Rosa carolina
Rca Rosa avensis
Vob Viburnum opulus

Herbaceous Riparian Mix
Ang Anglica sylvestris
Cp Calthra palustris
Cpr Cardamine pratensis
Crx Carex riparia
Euc Eupatorium cannabinum
Fil Filipendula ulmaria
Gr Geum rivale
Ips Iris pseudacorus
Je Juncus effusus
Lsal Lythrum salicaria
Pau Phragmites australis
Saur Scrophularia auriculata
St Silene flos-cuculi
Vib Veronica beccabunga

Hedgerow Mix
Ac Acer campestre
Csa Cornus sanguinea
Cav Corylus avellana
Cmo Crataegus monogyna
Euc Eucalyptus europaeus
Lvg Ligustrum vulgare
Psp Prunus spinosa
Rca Rhamnus cathartica
Rca Rosa carolina
Vob Viburnum opulus

Supplementary Planting Mix
Cp Calthra palustris
Euc Eupatorium cannabinum
Lsal Lythrum salicaria
ANGSY Anglica sylvestris
MENAQ Mentha aquatica
PHRAU Phragmites australis

Low Native Shrub Mix
Csa Cornus sanguinea
Cav Corylus avellana
Rca Rosa carolina
Rca Rosa rubiginosa
Sca Salix caprea
Lvg Ligustrum vulgare
Psp Prunus spinosa
ROSRU Rosa rubiginosa

Low Wet Shrub Mix
Sca Salix caprea
CORAV Corylus avellana
Sn Sambucus nigra
Vob Viburnum opulus
Sv Salix viminalis
Psp Prunus spinosa



KEY

- Site Boundary
- Existing Vegetation to be Retained
- Existing Overhead Powerline
- Proposed Hedgerow Mix
Hedgerow Mix, double staggered, 5/1m
- Proposed Street Trees
- Proposed Hedgerow Trees
- Proposed Individual Trees
- Proposed Woodland Mix
Woodland Mix, 1 plant per 4m²
- Proposed Woodland Edge Mix
Woodland Edge Mix, 1 plant per 4m²
- Proposed Native Shrub Mix
Native Shrub Mix, 1/m²
- Proposed Low Native Shrub Mix
Low Native Shrub Mix, 1/m²
- Proposed Wet Woodland Mix
Wet Woodland Mix, 1 plant per 4m²
- Proposed Herbaceous Riparian Mix
Herbaceous Riparian Mix, 5/m²
- Proposed Flowering Lawn Mix
EL1 - Flowering Lawn Mixture (or similar approved), Emorsgate, 4g/m²
- Proposed Wildflower Meadow Mix
EM3 - Special General Purpose Meadow Mixture (or similar approved), Emorsgate, 4g/m²
- Proposed Wildflower Meadow Mix (Semi-Shade)
EH1 - Hedgerow Mixture (or similar approved), Emorsgate, 4g/m²
- Proposed Rain Garden/Wetland Mix
EM8 Meadow Mixture For Wetlands (or similar approved), Emorsgate, 4g/m²
- Proposed Rain Garden/Wetland Mix Type 2
EM8+ Meadow Mixture For Wetlands (or similar approved), Emorsgate, 4g/m²
- Proposed Low Wet Shrub Mix
Low Wet Shrub Mix, 1/m²
- Proposed 1.5m wide DAE Montseny Timber Bench
Specification refer to the WBC Town Centres & Other Public Realm Palette of Materials'
- Proposed Lighting Location
Details refer to drawing WMHP-TG-SRWG1-M2-LI-1301
- Proposed Sign Location
Details refer to drawing WMHP-TG-SRWG1-M2-HI-1201
- Proposed Visibility Splay
Details refer to drawing WMHP-TG-SRWG1-M2-HI-0091
- Dead Hedge
An upright structure of woody cuttings woven between vertical stakes adjacent to the Emn Brook
- Proposed Willow Spiling Locations
Bank stabilisation
- 8m Buffer for Watercourse Habitat
- 4m Buffer for Underground cables
- Clearance for overhead powerline.
Clearance calculated in line with SSEN data received for 132KV.

DO NOT SCALE

- TREE PIT CONSTRUCTION DETAILS REFER TO DRAWINGS WMHP-TG-SRWG1-DR-LS-3010 - 3011
- ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.
- ALL LEVELS ARE IN METRES AOD UNLESS NOTED OTHERWISE.
- REFER TO THE 500 SERIES FOR LEVEL INFORMATION
- FENCE DETAILS REFER TO DRAWINGS WMHP-TG-SRWG1-DR-LS-3001 - 3009
- ROAD RESTRAINT SYSTEMS REFER TO DRAWINGS WMHP-TG-SRWG1-DR-HI-0401 - 0409 AND 0421
- ALL NEW AND EXISTING SHRUB PLANTING, TREES AND VEGETATION TO BE PRUNED AND MAINTAINED IN PERPETUITY TO ALLOW FULL VISIBILITY OF ROAD SIGNAGE

SITE LOCATION PLAN SCALE: 1:25000

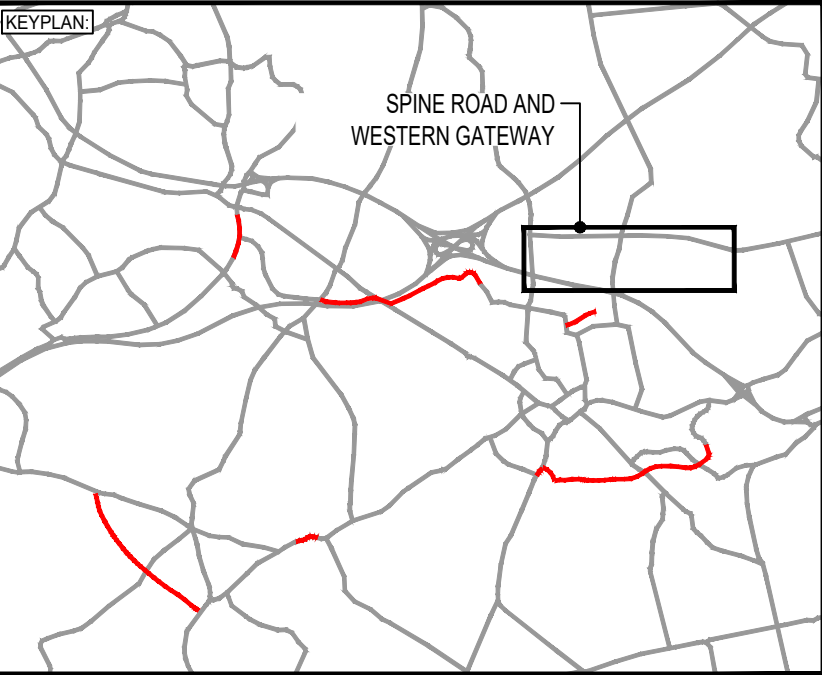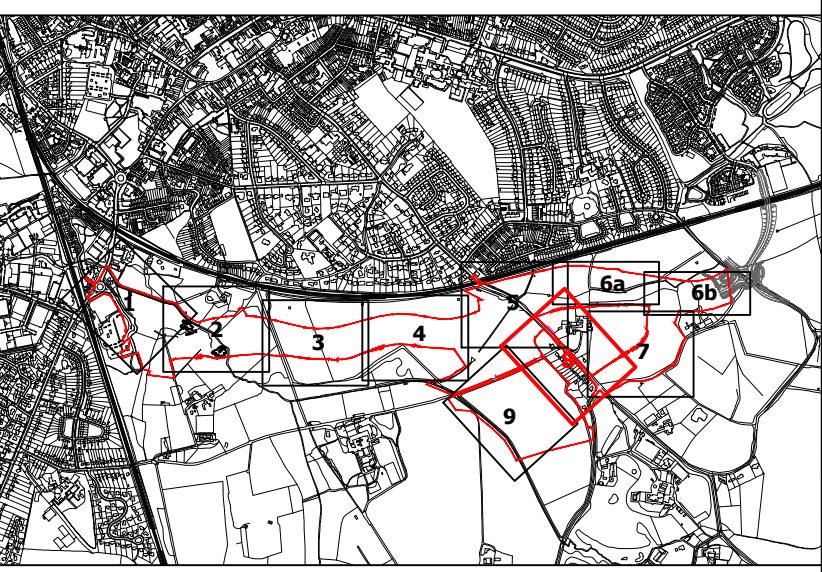

REV	DATE	BY	DESCRIPTION	CHK	APP
P11	13/05/2025	NJ	REVISED TO MEET LAP AND STAKE HOLDERS COMMENTS	JC	JC
P10	07/05/2025	NJ	REVISED TO MEET LPA COMMENTS	JC	JC
P09	07/02/2025	LC	REVISED TO INCL ADD. HEDGE & TREE PLANTING	JC	JC

FOR REVIEW & COMMENT

S3

DESIGNER: **Tony Gee**
Consulting Civil, Structural and Geotechnical Engineers

Tony Gee and Partners LLP
Hardy House
140 High Street
Esher, Surrey
KT10 9QU
Tel: 01372 461600
www.tonygee.com

CLIENT: **WOKINGHAM BOROUGH COUNCIL**

Shute End, Wokingham, Berkshire RG40 1BN
Tel: (0118) 974 6000 Web: www.wokingham.gov.uk

SPINE ROAD AND WESTERN GATEWAY PHASE 1

HIGHWAYS
SOFT LANDSCAPING PLANTING PLAN


SHEET 8

SCALE @ A1: 1:500	CHECKED: JC	APPROVED: JC
PROJECT NO: C118047	DESIGNED: WM	DRAWN: WM
DATE: May 25		REV: P11

WMHP-TG-SRWG1-DR-LS-3008

File name: Y:\1. PROJECTS\977 SPINE ROAD AND WESTERN GATEWAY PHASE 1\04 DRAWINGS\01 BIM\01 RBA ST 0-301 WIP\03 CAD Dwg\04 MODEL FILES\4977-LAN-XX-XX-M2-L-0002.DWG, printed on 18 May 2025 16:38:41, by Nithitha John

SIGNIFICANT RESIDUAL HAZARDS		
RESIDUAL HAZARD	STAGE	SUGGESTED CONTROL MEASURE
WORKING IN CLOSE PROXIMITY TO WATERCOURSES. EXPOSURE TO HAZARDOUS SUBSTANCES	C,D	Contractor to liaise with the lead local flood authority to gain flood alerts. Ensure workforce is suitably trained and competent and are wearing the appropriate level of PPE for the intended task to reduce the risk of workers contracting leptospirosis or well's disease.
WORKING IN ECOLOGICALLY SENSITIVE AREA	C,D	Construction activities will be directly adjacent to existing watercourse. Contractor's method statement to consider the risk of working adjacent to existing watercourse to ensure waste is not inadvertently directed into watercourse. Contractor to liaise with the lead local flood authority to gain flood alerts. Ensure workforce is suitably trained and competent and are wearing the appropriate level of PPE for the intended task to reduce the risk of workers contracting leptospirosis or well's disease.
NOTE: The above hazards do not include every hazard or assumption, but identify significant residual construction hazards that are not likely to be obvious to a competent contractor and those that could be difficult to manage effectively. Refer also to the designer's risk documentation.		
Prior to undertaking any planting works beneath or adjacent to overhead or underground power lines, the contractor must ensure they are satisfied with all guidance relating to tree planting, specifically regarding tree height clearance requirements. The following guidance should be considered:		
• National Grid Guidance: Design Guidelines for Development Near High Voltage Overhead Lines; and		
• Scottish & Southern Electricity Networks: Guidance for Third Parties Working Near SSEN Transmission Asset.		
The works contractors must ensure proper safety measures are in place and coordinated with the relevant authorities to mitigate risks during construction.		

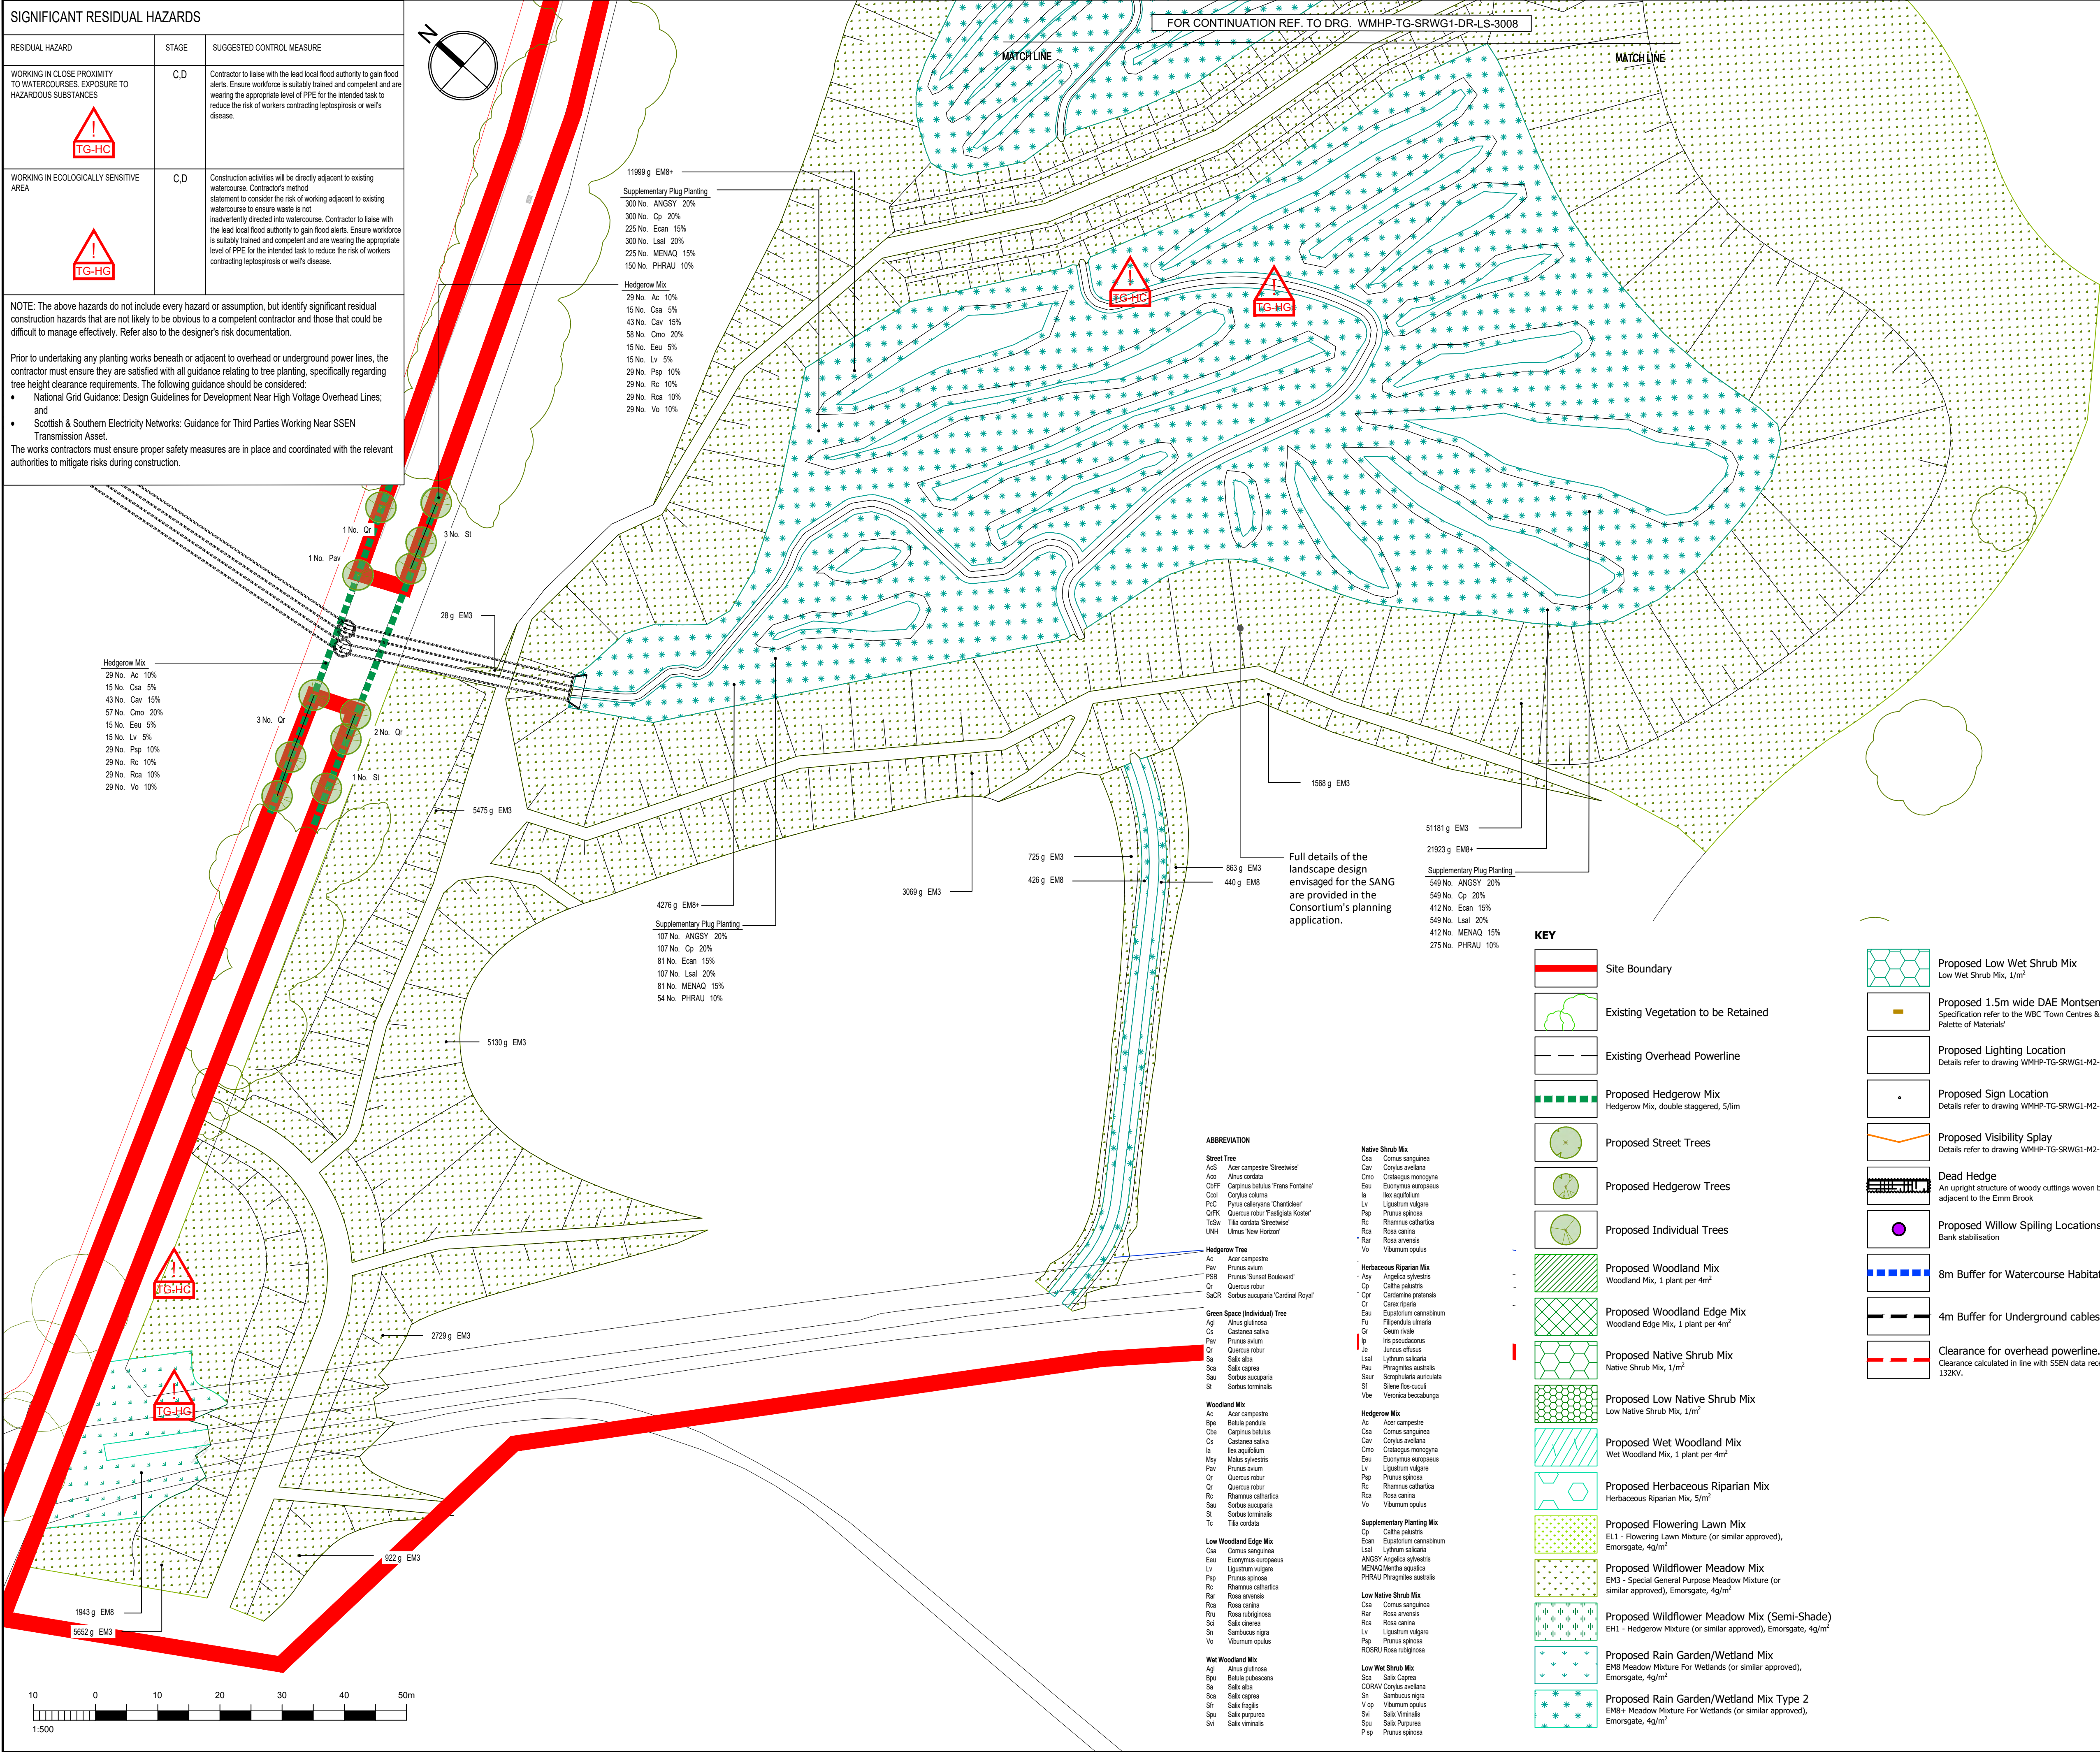

File name: Y:\1. PROJECTS\701 SPINE ROAD AND WESTERN GATEWAY PHASE 1\04 DRAWINGS\01 BIM\01 RBA ST 0-301 WIP\03 CAD DWG\MODEL FILES\4977-LAN-XX-M2-L-0002.DWG, printed on 16 May 2025 16:40:18, by Nithila John

ABBREVIATION	
Street Tree	
AcS	Acer campestre 'Streetwise'
Aco	Aulus cordata
Coff	Carpinus betulus 'Frans Fontaine'
Cot	Cotinus coccinea
PoC	Pyrus calleryana 'Charitice'
QrK	Quercus robur 'Fastigiata Koster'
TcS	Tilia cordata 'Streetwise'
UNH	Ulmus 'New Horizon'
Hedgerow Tree	
Ac	Acer campestre
Pav	Prunus avium
P8B	Prunus 'Sunset Boulevard'
Qr	Quercus robur
StCR	Sorbus aucuparia 'Cardinal Royal'
Green Space (Individual) Tree	
Ag	Alex glutinosa
Cs	Castanea sativa
Pav	Prunus avium
Qr	Quercus robur
Sal	Salix alba
Sca	Salix caprea
Sau	Sorbus aucuparia
St	Sorbus torminalis
Woodland Mix	
Ac	Acer campestre
Bet	Betula pendula
Che	Carpinus betulus
Cs	Castanea sativa
E	Ilex aquifolium
May	Malus sylvestris
Pav	Prunus avium
Qr	Quercus robur
Rc	Rhamnus cathartica
Sau	Sorbus aucuparia
St	Sorbus torminalis
Tc	Tilia cordata
Low Woodland Edge Mix	
Csa	Cornus sanguinea
Ecu	Eucalyptus europaeus
Lv	Ligustrum vulgare
Pap	Prunus spinosa
Rc	Rhamnus cathartica
Rar	Rosa arvensis
Rca	Rosa canina
Rn	Rosa rugosa
Sa	Salix caprea
Sb	Sambucus nigra
Vi	Viburnum opulus
Wet Woodland Mix	
Ag	Alex glutinosa
Bu	Betula pubescens
Sal	Salix alba
Sca	Salix caprea
Sh	Salix fragilis
Spu	Salix purpurea
Svi	Salix viminalis
Native Shrub Mix	
Csa	Cornus sanguinea
Cav	Corylus avellana
Ecu	Eucalyptus europaeus
La	Ligustrum vulgare
Pap	Prunus spinosa
Rc	Rhamnus cathartica
Rca	Rosa canina
Rar	Rosa arvensis
Vi	Viburnum opulus
Herbaceous Riparian Mix	
Ang	Angelica sylvestris
Cp	Calluna palustris
Cot	Cotinus coccinea
Cx	Carex riparia
Ecu	Eucalyptus europaeus
Fil	Filipendula ulmaria
Ge	Geum rivale
Ip	Iris pseudacorus
La	Ligustrum vulgare
Lsal	Salix alba
Pau	Phragmites australis
Sar	Scrophularia auriculata
Sl	Silene flos-cuculi
Vbe	Veronica beccabunga
Supplementary Planting Mix	
Cp	Calluna palustris
Ecu	Eucalyptus europaeus
Lsal	Salix alba
ANGSI	Angelica sylvestris
MENAQ	Mentha aquatica
PHRAU	Phragmites australis
Low Native Shrub Mix	
Csa	Cornus sanguinea
Cav	Corylus avellana
Cmo	Crataegus monogyna
Ecu	Eucalyptus europaeus
Lv	Ligustrum vulgare
Pap	Prunus spinosa
Rc	Rhamnus cathartica
Rca	Rosa canina
Rar	Rosa arvensis
Vi	Viburnum opulus
Low Wet Shrub Mix	
Sca	Salix caprea
Sb	Sambucus nigra
Svi	Salix viminalis
Psp	Prunus spinosa

KEY

Site Boundary

Existing Vegetation to be Retained

Existing Overhead Powerline

Proposed Hedgerow Mix

Proposed Street Trees

Proposed Hedgerow Trees

Proposed Individual Trees

Proposed Woodland Mix

Proposed Woodland Edge Mix

Proposed Native Shrub Mix

Proposed Low Native Shrub Mix

Proposed Wet Woodland Mix

Proposed Herbaceous Riparian Mix

Proposed Flowering Lawn Mix

Proposed Wildflower Meadow Mix

Proposed Wildflower Meadow Mix (Semi-Shade)

Proposed Rain Garden/Wetland Mix

Proposed Rain Garden/Wetland Mix Type 2

Proposed Low Wet Shrub Mix

Proposed 1.5m wide DAE Montseny Timber Bench

Proposed Lighting Location

Proposed Sign Location

Proposed Visibility Splay

Dead Hedge

Proposed Willow Spilling Locations

8m Buffer for Watercourse Habitat

4m Buffer for Underground cables

Clearance for overhead powerline.

DO NOT SCALE

- TREE PIT CONSTRUCTION DETAILS REFER TO DRAWINGS WMHP-TG-SRWG1-DR-LS-3010 - 3011
- ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.
- ALL LEVELS ARE IN METRES AOD UNLESS NOTED OTHERWISE.
- REFER TO THE 500 SERIES FOR LEVEL INFORMATION
- FENCE DETAILS REFER TO DRAWINGS WMHP-TG-SRWG1-DR-HI-0401 - 0409 AND 0421
- ROAD RESTRAINT SYSTEMS REFER TO DRAWINGS WMHP-TG-SRWG1-DR-HI-0401 - 0409 AND 0421
- ALL NEW AND EXISTING SHRUB PLANTING, TREES AND VEGETATION TO BE PRUNED AND MAINTAINED IN PERPETUITY TO ALLOW FULL VISIBILITY OF ROAD SIGNAGE

SITE LOCATION PLAN

SCALE: 1:25000

KEYPLAN

SPINE ROAD AND WESTERN GATEWAY

REV	DATE	BY	DESCRIPTION	CHK	APP
P11	13/05/2025	NJ	REVISED TO MEET LAP AND STAKE HOLDERS COMMENTS	JC	JC
P10	07/05/2025	NJ	REVISED TO MEET LPA COMMENTS	JC	JC
P09	07/02/2025	LC	REVISED TO INCL. ADD. HEDGE & TREE PLANTING	JC	JC

DRAWING STATUS:

FOR REVIEW & COMMENT

S3

DESIGNER:

Tony Gee and Partners LLP

Hardy House
140 High Street
Esher, Surrey
KT10 9JQ
Tel: 01372 461600

www.tonygee.com

Consulting Civil, Structural and Geotechnical Engineers

CLIENT:

WOKINGHAM BOROUGH COUNCIL

Shute End, Wokingham, Berkshire RG40 1BN
Tel: (0118) 974 6000 Web: www.wokingham.gov.uk

PROJECT:

SPINE ROAD AND WESTERN GATEWAY PHASE 1

TITLE:

HIGHWAYS
SOFT LANDSCAPING PLANTING PLAN

SCALE @ A1:

1:500

CHECKED:

JC

APPROVED:

JC

PROJECT NO:

C118047

DESIGNED:

WM

DRAWN:

WM

DATE:

May 25

DRAWING NO:

WMHP-TG-SRWG1-DR-LS-3009

REV:

P11

SHEET 9

Appendix 2 WMHP-TG-SRWG1-DR-LA-3021-3026



DO NOT SCALE

LEGEND

PLANNING APPLICATION 192928 RED LINE BOUNDARY

NOTES:
1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.
2. ALL LEVELS ARE IN METRES AOD UNLESS NOTED OTHERWISE.
3. REFER TO THE 500 SERIES FOR LEVEL INFORMATION

KEYPLAN

SPINE ROAD AND WESTERN GATEWAY

P04	13/05/2025	MH	UPDATED FOLLOWING COMMENTS	DJF	JC
P03	02/06/2022	NZM	MATTERS OUTSTANDING WMHP-TG-SRWG1-RG-DM-0010	BH	JC
REV	DATE	BY	DESCRIPTION	CHK	APP

DRAWING STATUS:

FOR REVIEW AND COMMENT

S3

DESIGNER:

Tony Gee

Consulting Civil, Structural and Geotechnical Engineers

Tony Gee and Partners LLP
Hardy House
140 High Street
Esher, Surrey
KT10 9QJ
Tel: 01372 461600
www.tonygee.com

CONTRACTOR:

CLIENT:

WOKINGHAM
BOROUGH COUNCIL

Shute End, Wokingham, Berkshire RG40 1BN
Tel: (0118) 974 6000 Web: www.wokingham.gov.uk

PROJECT:

WOKINGHAM MAJOR HIGHWAYS PROGRAMME
SPINE ROAD AND WESTERN GATEWAY PHASE 1


TITLE:

HIGHWAYS
RIVERBANK ECOLOGICAL ENHANCEMENTS
LOCATION PLAN

SHEET 1

SCALE @ A1: 1:500	CHECKED: JC	APPROVED: JC
PROJECT NO: C118047	DESIGNED: GS	DRAWN: GS
DRAWING NO: WMHP-TG-SRWG1-DR-LS-3021	DATE: May 25	REV: P04

File name: I:\BOLDATA\PROJECTS\2020\12281C_WP201_CALCULATIONS\BACKWATER.DWG, printed on 14 May 2025 15:24:20, by Matt Hallon

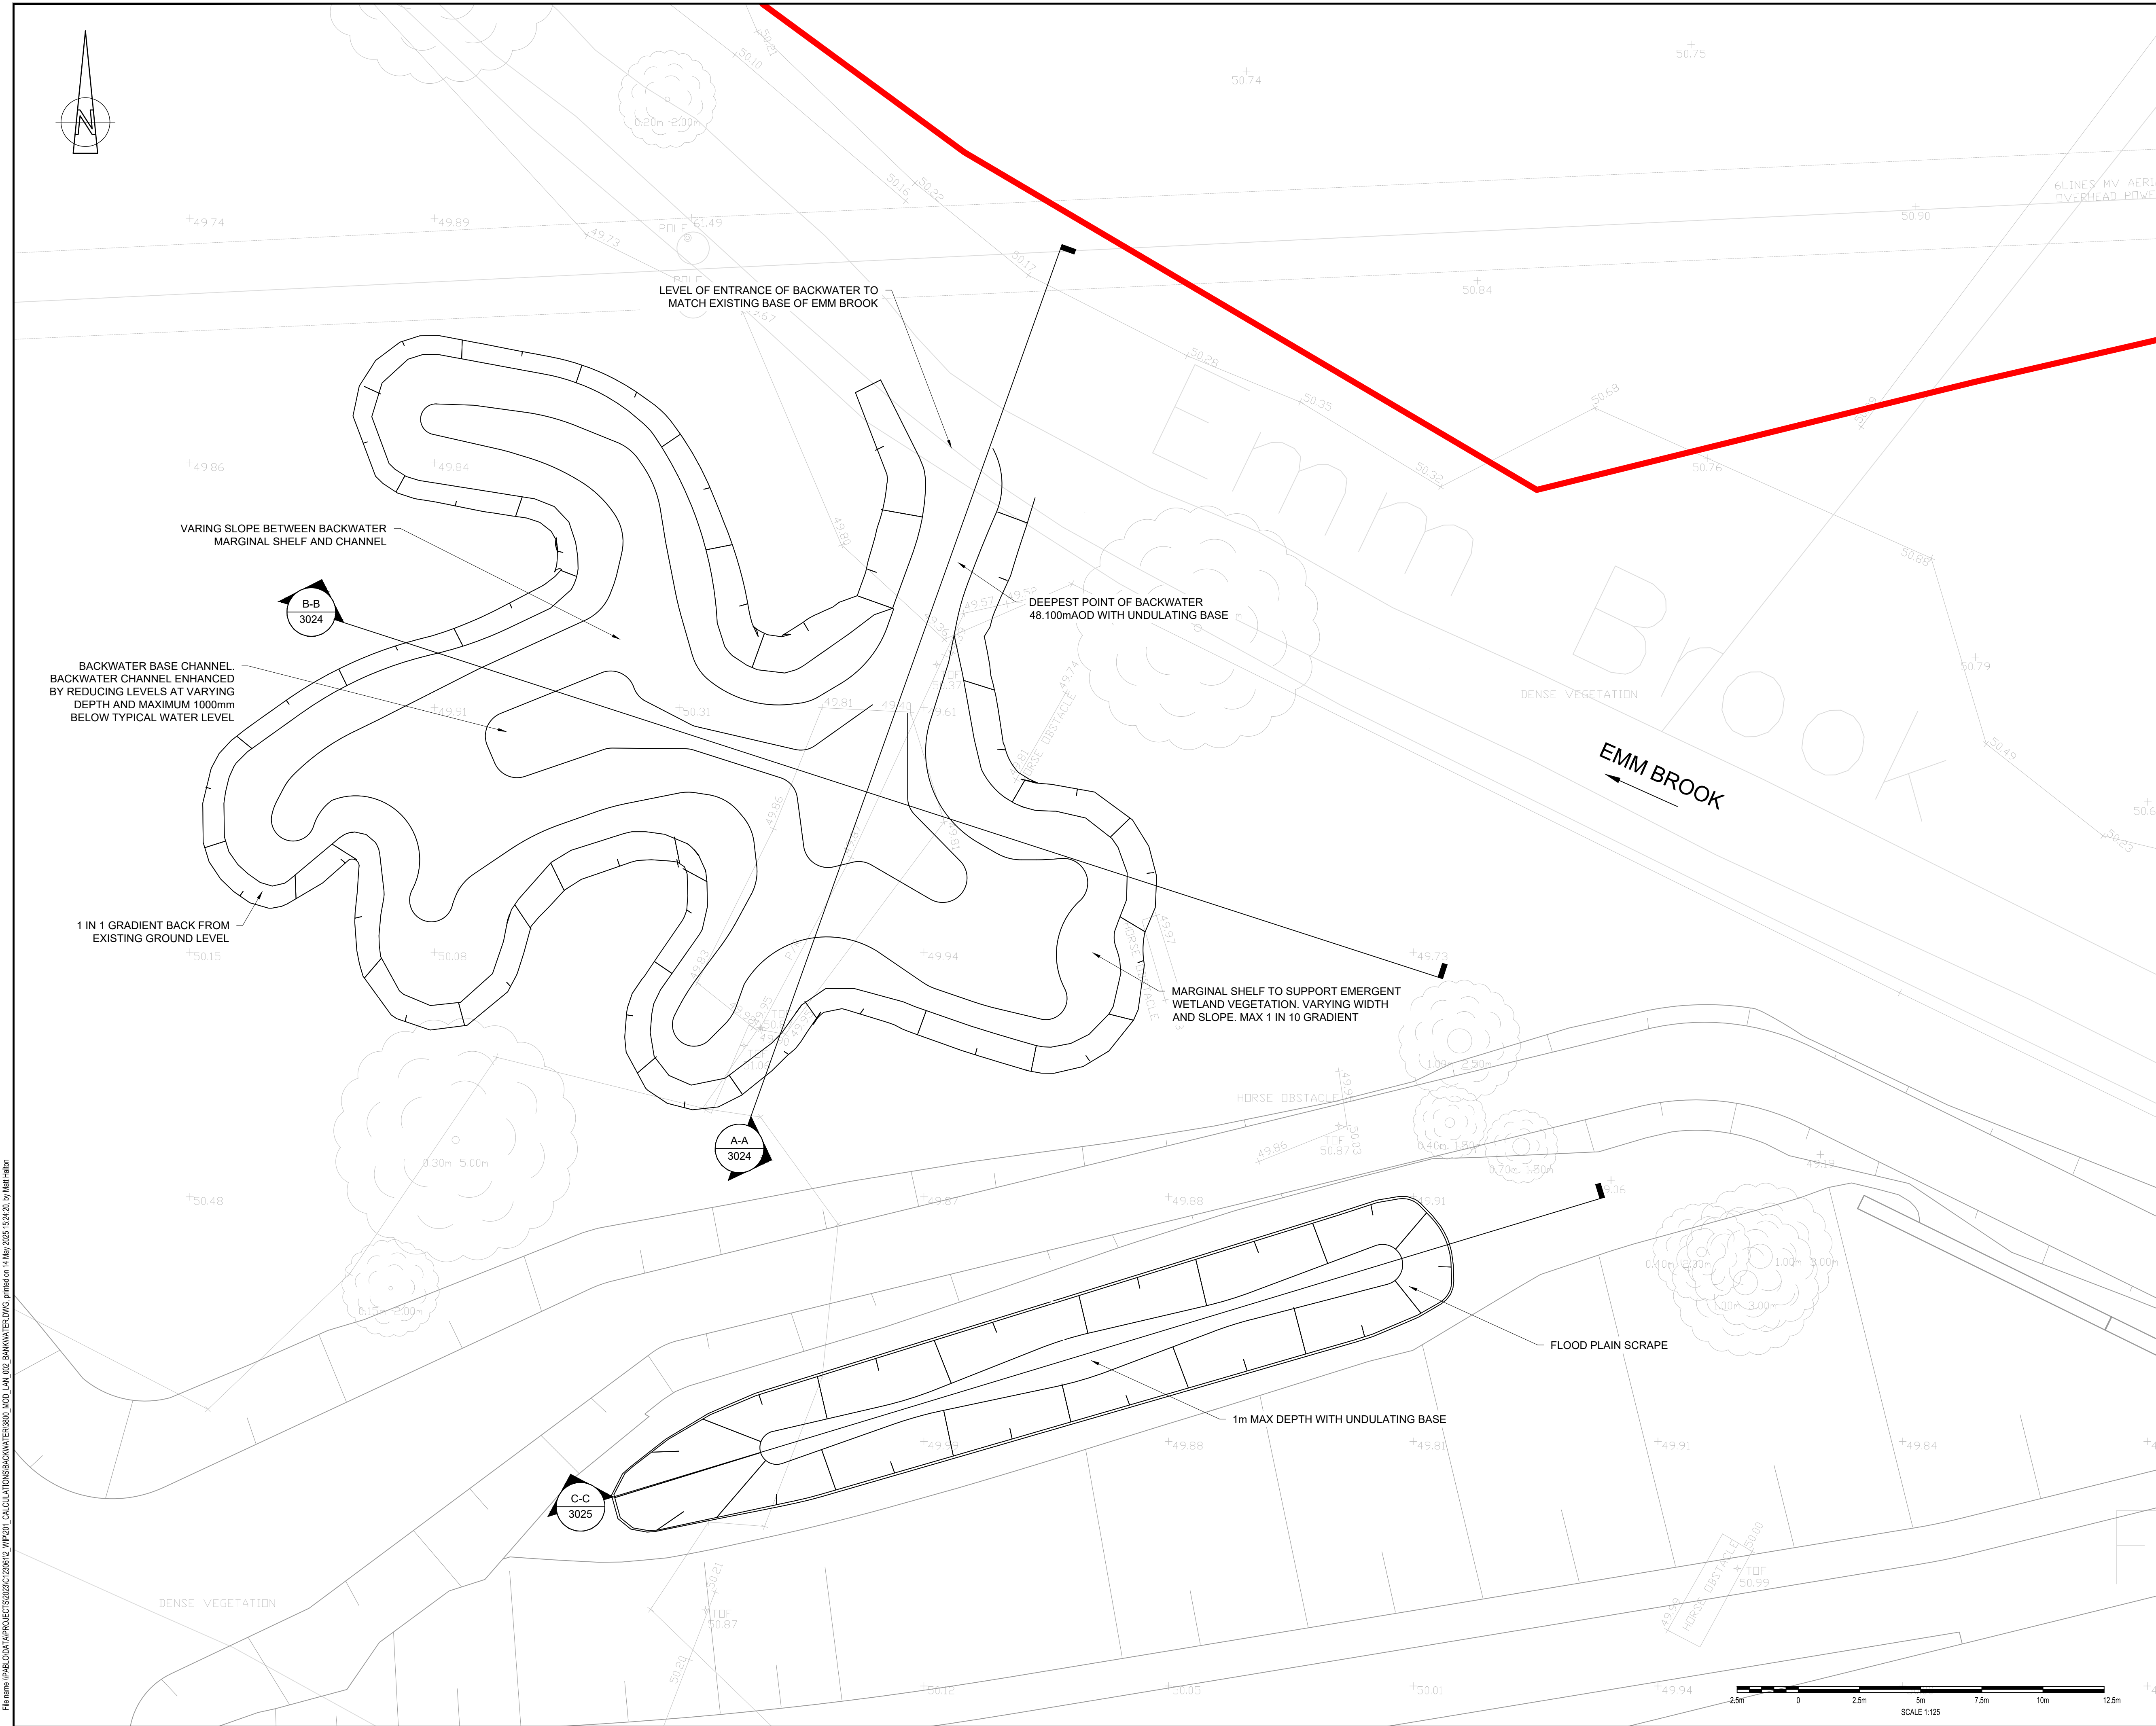

DO NOT SCALE

LEGEND

PLANNING APPLICATION 192928 RED LINE BOUNDARY

NOTES:
1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.
2. ALL LEVELS ARE IN METRES AOD UNLESS NOTED OTHERWISE.
3. THE SHAPE OF BACKWATERS AND SCRAPES ARE INDICATIVE AND DO NOT NEED TO BE RECREATED ACCURATELY. IMPORTANT FEATURES OF THE SHAPES ARE:

- ALL FEATURES SHOULD HAVE IRREGULAR SHAPES WITH ELONGATED SHALLOW 'FINGERS' AT MARGINS.
- SCRAPES SHOULD HAVE IRREGULAR BASE DEPTH 1.0M BELOW EXISTING GROUND ±0.5M IN CENTRE.
- SCRAPES SHOULD HAVE VERY GRADUAL SLOPES AT THE MARGINS <1 IN 10 TYPICAL.
- BACKWATERS THEY NEED A 1 IN 1 BANK FROM EXISTING GROUND TO TYPICAL WATER LEVEL 49.0-49.1M AOD AND A VARYING WIDTH 'SHELF' AT OR JUST BELOW THIS LEVEL TO SUPPORT WETLAND VEGETATION.

4. LIVESTOCK SHOULD BE EXCLUDED FROM BACKWATERS.

5. SCRAPES MAY BE MANAGED BY LIGHT CATTLE GRAZING.

6. THE 'SHELF' AREAS OF THE BACKWATERS MAY BE PLANTED WITH A MIXTURE OF NATIVE TALL EMERGENT PLANTS. SUITABLE SPECIES MAY INCLUDE BULRUSH (TYPHA LATIFOLIA), YELLOW FLAG (IRIS PSEUDACORUS), REED SWEET GRASS (GLYCERIA MAXIMA), WATER PLANTAIN (ALISMA PLANTAGO-AQUATICA), FLOWERING RUSH (BOTOMUS UMBELLATUM) BRANCHED BUR-REED (SPARGANIUM ERECTUM), WATER MINT (MENTHA AQUATICA). SOME SHORTER NATIVE FLOWERING PLANTS SUCH AS MARSH MARIGOLD (CALTHA PALUSTRIS) SHOULD ALSO BE CONSIDERED.

7. SCRAPES OUGHT TO QUICKLY COLONISE WITH THE SURROUNDING WET GRASSLAND SPECIES FROM THE EXISTING SEED BANK, AND THERE IS PROBABLY NO NEED TO STOCK WITH PLANTS. IF DESIRED, A WET GRASSLAND SEED MIX COULD BE SPREAD TO ENSURE A GOOD DIVERSITY OF SEED IN THESE AREAS.

8. DOGS SHOULD BE EXCLUDED FROM SCRAPE AND BACKWATER AREAS BY VISITOR MANAGEMENT/ FENCING SO FAR AS IS POSSIBLE.

9. REFER TO THE 500 SERIES FOR LEVEL INFORMATION

KEY PLAN

P04	13/05/2025	MH	UPDATED FOLLOWING COMMENTS	DJF	JC
P03	02/06/2022	NZM	MATTERS OUTSTANDING WMHP-TG-SRWG1-RG-DM-0010	BH	JC
REV	DATE	BY	DESCRIPTION	CHK	APP

DRAWING STATUS: FOR REVIEW AND COMMENT S3

DESIGNER:

Tony Gee and Partners LLP
Hardy House
140 High Street
Esher, Surrey
KT10 9QJ
Tel: 01372 461600
www.tonygee.com
Consulting Civil, Structural and Geotechnical Engineers

CONTRACTOR:

CLIENT:

WOKINGHAM
BOROUGH COUNCIL

Shute End, Wokingham, Berkshire RG40 1BN
Tel: (0118) 974 6000 Web: www.wokingham.gov.uk

PROJECT:


WOKINGHAM MAJOR HIGHWAYS PROGRAMME
SPINE ROAD AND WESTERN GATEWAY PHASE 1


TITLE:

HIGHWAYS
RIVERBANK ECOLOGICAL ENHANCEMENTS
DETAILED LOCATION PLAN 1

SCALE @ A1:	CHECKED:	APPROVED:
1:125	JC	JC
PROJECT NO:	DESIGNED:	DRAWN:
C118047	GS	GS
DRAWING NO:	DATE:	REV:
WMHP-TG-SRWG1-DR-LS-3022	May 25	P04

SCALE @ A1:	1:125	CHECKED:	JC	APPROVED:	JC
PROJECT NO:	C118047	DESIGNED:	GS	DRAWN:	GS
DRAWING No:				DATE:	May 25
WMHP-TG-SRWG1-DR-LS-3023					REV:
					P04



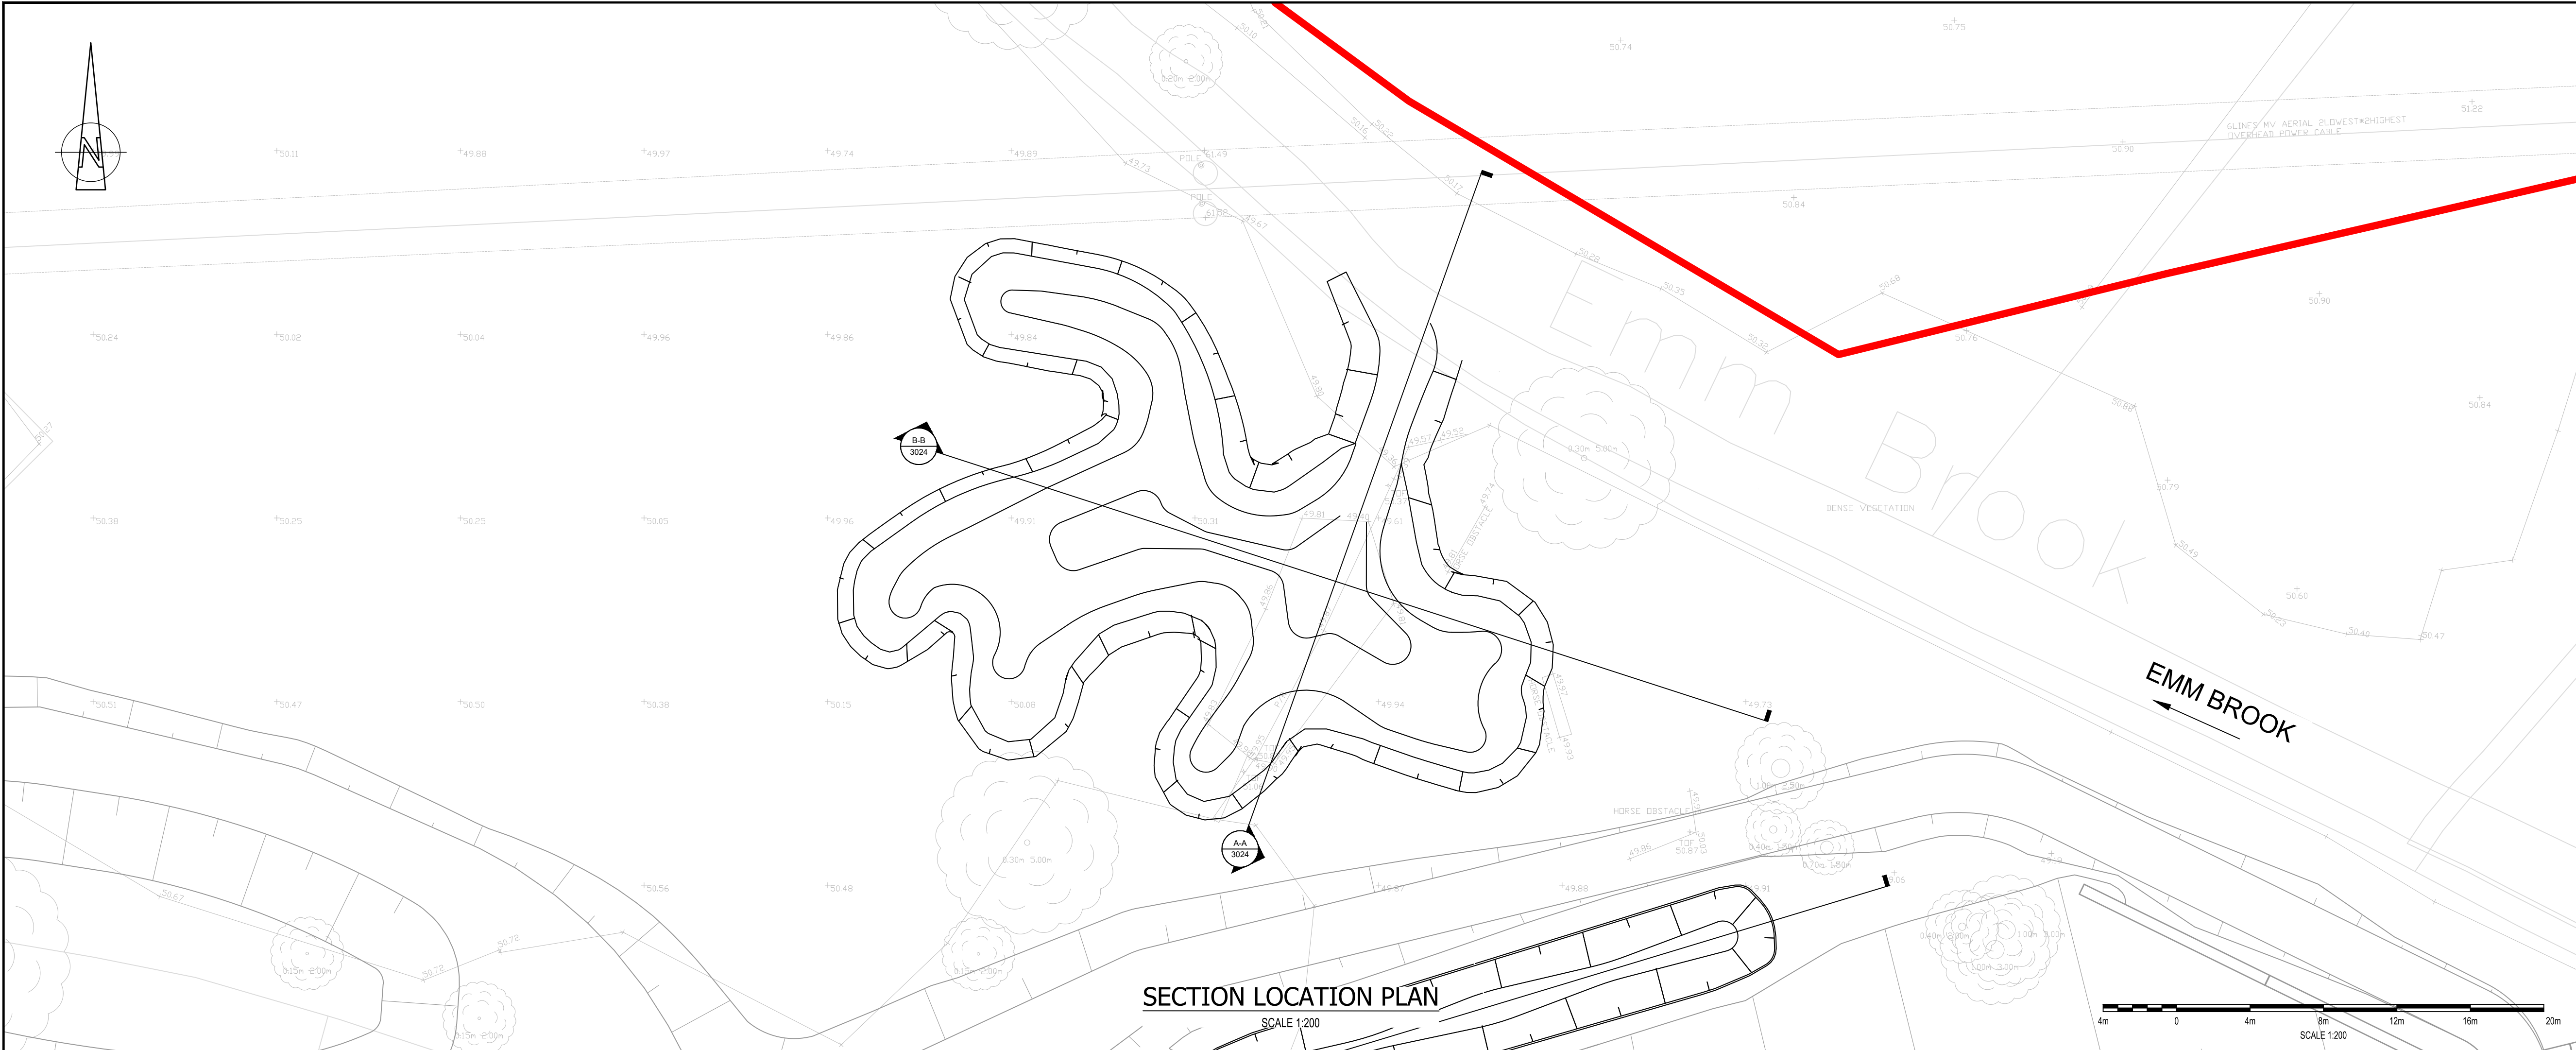

DO NOT SCALE

LEGEND

PLANNING APPLICATION 192928 RED LINE BOUNDARY

EXISTING GROUND LEVEL

PROPOSED GROUND LEVEL

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.

2. ALL LEVELS ARE IN METRES AOD UNLESS NOTED OTHERWISE.

3. REFER TO THE 600 SERIES FOR LEVEL INFORMATION

4. DRAWING TO BE READ IN CONJUNCTION WITH DRAWINGS 3002 AND 3022 AS WELL AS THE LANDSCAPE AND ECOLOGICAL MANAGEMENT PLAN (LEMP)

P04	13/05/2025	MH	UPDATED FOLLOWING COMMENTS	DJF	JC
P03	02/06/2022	NZM	MATTERS OUTSTANDING WMHP-TG-SRWG1-RG-DM-0010	BH	JC
REV	DATE	BY	DESCRIPTION	CHK	APP

DRAWING STATUS: FOR REVIEW AND COMMENT S3

DESIGNER:

Tony Gee and Partners LLP

Hardy House

140 High Street

Esher, Surrey

KT10 9QJ

Tel: 01372 461600

www.tonygee.com

Consulting Civil, Structural and Geotechnical Engineers

CONTRACTOR:

CLIENT:

WOKINGHAM

BOROUGH COUNCIL

Shute End, Wokingham, Berkshire RG40 1BN

Tel: (0118) 974 6000 Web: www.wokingham.gov.uk

PROJECT:

WOKINGHAM MAJOR HIGHWAYS PROGRAMME

SPINE ROAD AND WESTERN GATEWAY PHASE 1

TITLE:

HIGHWAYS


RIVERBANK ECOLOGICAL ENHANCEMENTS

SECTIONS

SHEET 4

SCALE @ A1:	CHECKED:	APPROVED:
AS SHOWN	JC	JC
PROJECT NO:	DESIGNED:	DRAWN:
C118047	GS	GS
DRAWING NO:	DATE:	REV:
WMHP-TG-SRWG1-DR-LS-3024	May 25	P04

File name: I:\BOLDATA\PROJECTS\2023\123810\WP201_CALCULATIONS\BACKWATER\B01_MOD_LAN_002_BANWATER.DWG, printed on 14 May 2025 15:14:17 by Matt Hallon

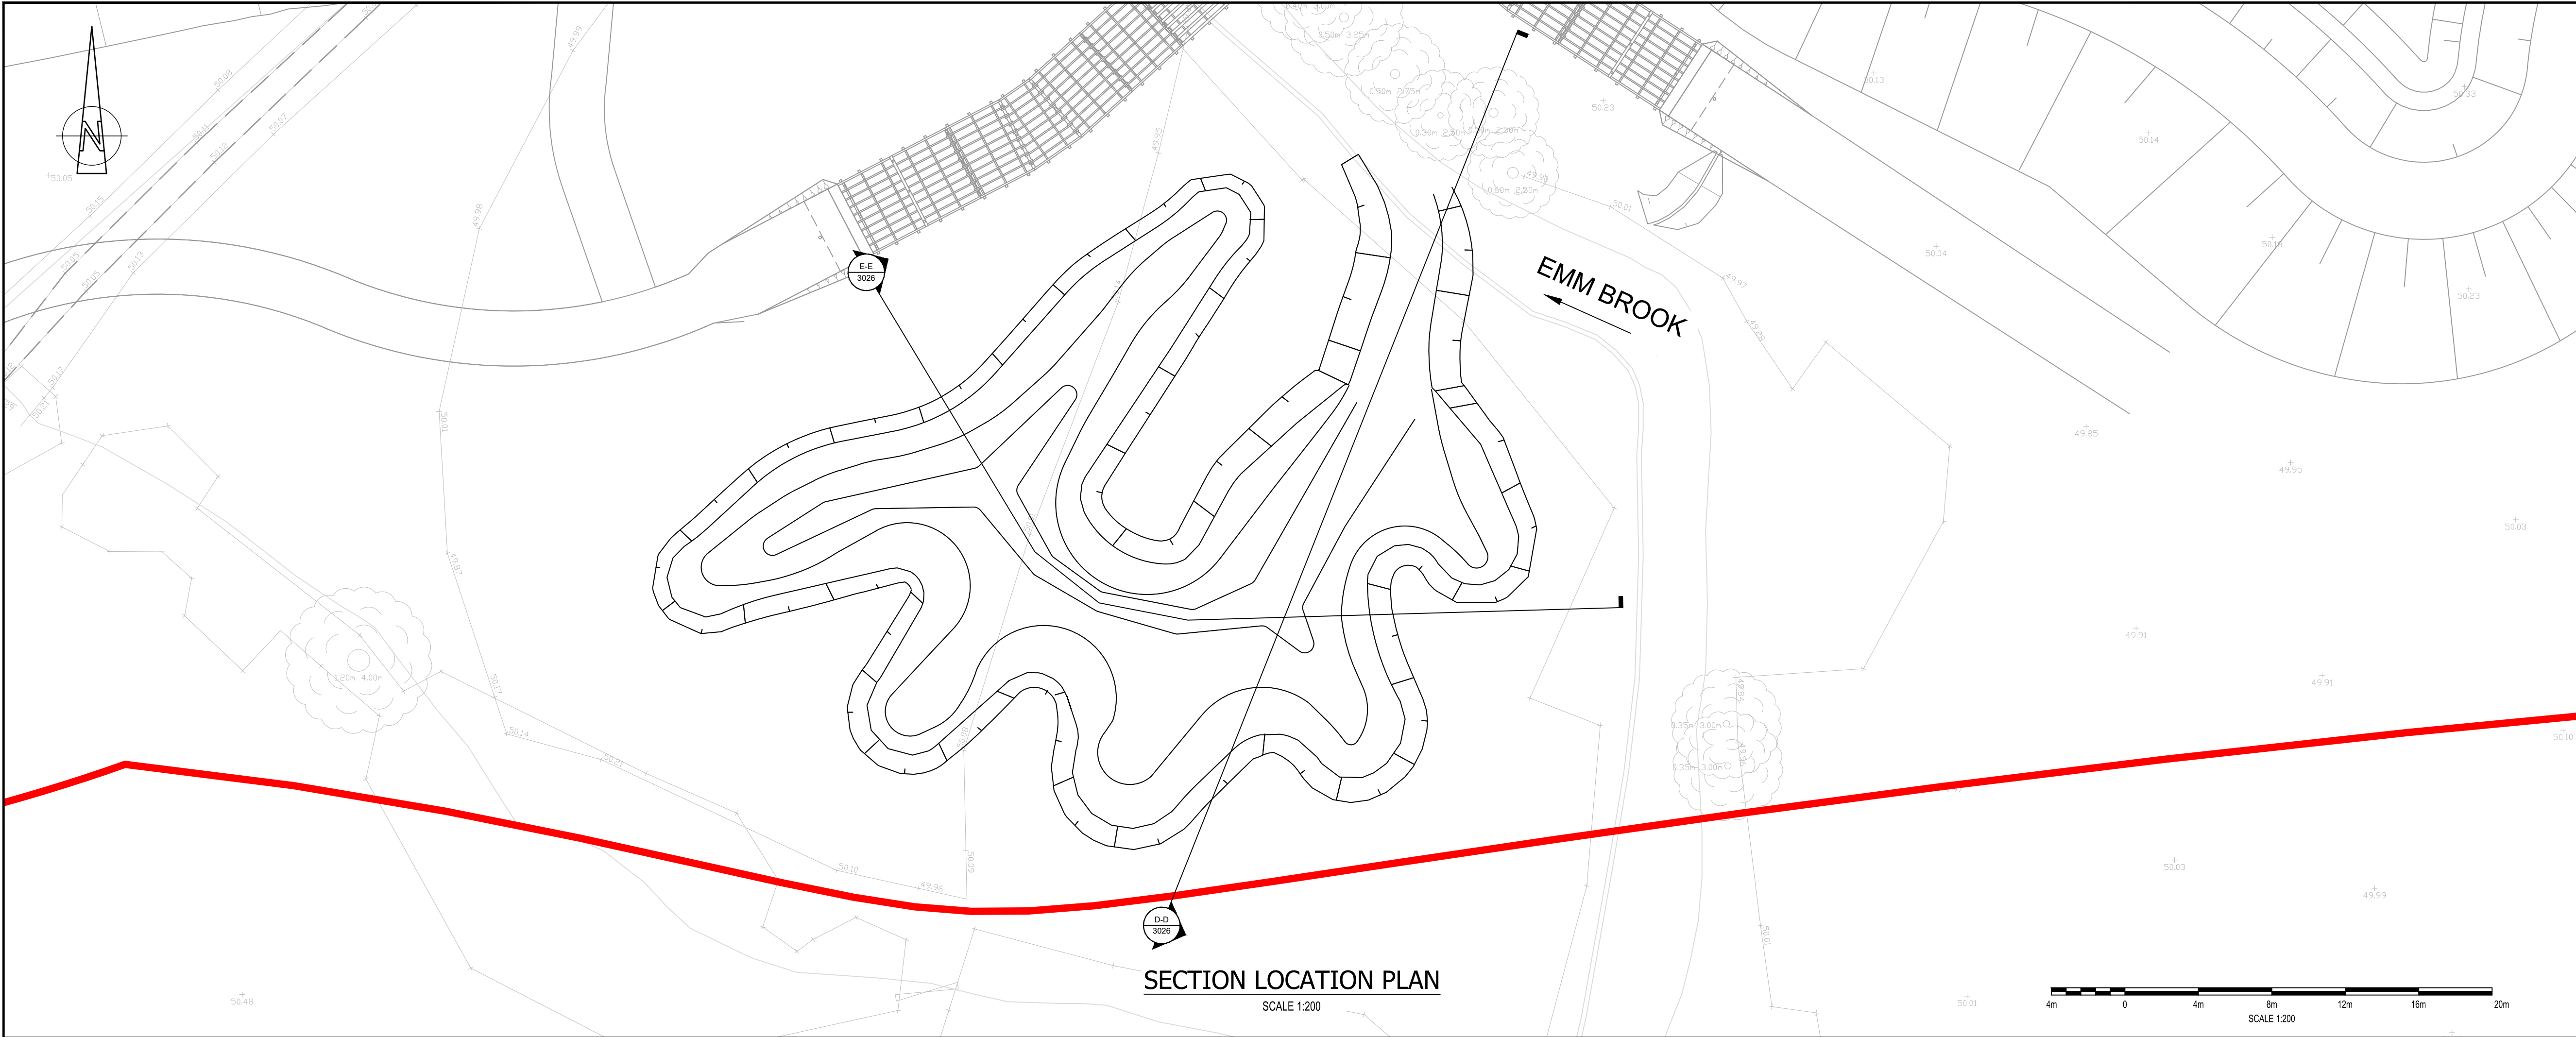

DO NOT SCALE

LEGEND

PLANNING APPLICATION 192928 RED LINE BOUNDARY

EXISTING GROUND LEVEL

PROPOSED GROUND LEVEL

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.

2. ALL LEVELS ARE IN METRES AOD UNLESS NOTED OTHERWISE.

3. REFER TO THE 500 SERIES FOR LEVEL INFORMATION

4. DRAWING TO BE READ IN CONJUNCTION WITH DRAWINGS 3002 AND 3023 AS WELL AS THE LANDSCAPE AND ECOLOGICAL MANAGEMENT PLAN (LEMP)

KEY PLAN

SPINE ROAD AND WESTERN GATEWAY

SECTION D-D
SECTION THROUGH BACKWATER CHANNEL CONNECTION
SCALE 1:100, VERTICAL SCALE 1:1, HORIZONTAL SCALE 1:1

WETLAND VEGETATION ESTABLISHED BY NATURAL REGENERATION

EXISTING GROUND LEVEL (APPROX.)

EARTHWORK SLOPE MAXIMUM 1 IN 1

VARYING WIDTH AND PROFILE LEDGE FOR EMERGENT VEGETATION

BACKWATER BASE LEVEL TO UNDULATE +/- 100mm IN ADDITION TO VARYING LEVELS

BACKWATER CHANNEL ENHANCED BY REDUCING LEVELS BY APPROX. 1000mm BELOW TYPICAL WATER LEVEL

EXISTING BANK REMOVED TO FORM CHANNEL AND BACKWATER TO EMM BROOK

EMM BROOK

TYPICAL WATER LEVEL 49.100

LOWEST LEVEL 48.100 5 (APPROX)

ELEVATION AOD(m)

CHAINAGE (m)

SECTION E-E
SECTION THROUGH BACKWATER
SCALE 1:100, VERTICAL SCALE 1:1, HORIZONTAL SCALE 1:1

WETLAND VEGETATION ESTABLISHED BY NATURAL REGENERATION

BACKWATER BASE LEVEL TO UNDULATE +/- 100mm IN ADDITION TO VARYING LEVELS

EARTHWORK SLOPE MAXIMUM 1 IN 1

EXISTING GROUND LEVEL (APPROX.)

VARYING WIDTH AND PROFILE LEDGE FOR EMERGENT VEGETATION

TYPICAL WATER LEVEL 49.100

ELEVATION AOD(m)

CHAINAGE (m)

SECTIONS

SCALE 1:100

SCALE 1:100

P04	13/05/2025	MH	UPDATED FOLLOWING COMMENTS	DJP	JC			
P03	02/06/2022	N2M	MATTERS OUTSTANDING WMHP-TG-SRWG01-RG-DM-0010	BH	JC			
REV	DATE	BY	DESCRIPTION	CHK	APP			
DRAWING STATUS:								
FOR REVIEW AND COMMENT					S3			
DESIGNER:								
			Tony Gee and Partners LLP Hardy House 140 High Street Esher, Surrey KT10 9QJ Tel: 01372 461600 www.tonygee.com Consulting Civil, Structural and Geotechnical Engineers					
CONTRACTOR:								
								
CLIENT:								
			WOKINGHAM BOROUGH COUNCIL Shute End, Wokingham, Berkshire RG40 1BN Tel: (0118) 974 6000 Web: www.wokingham.gov.uk					
PROJECT:								
WOKINGHAM MAJOR HIGHWAYS PROGRAMME SPINE ROAD AND WESTERN GATEWAY PHASE 1								
TITLE:								
HIGHWAYS RIVERBANK ECOLOGICAL ENHANCEMENTS SECTIONS								
SHEET 6								
SCALE @ A1:		CHECKED:		APPROVED:				
AS SHOWN		JC		JC				
PROJECT NO:		DESIGNED:		DATE:				
C118047		GS		May 25				
DRAWING NO:					REV:			
WMHP-TG-SRWG1-DR-LS-3026					P04			

File name: I:\BOLDATA\PROJECTS\2025\123810_C_WIP\201_CALCULATIONS\BACKWATER\3001_MOD_LAN_002_BAKWATER.DWG, printed on 14 May 2025 15:18:25, by Matt Hallon