

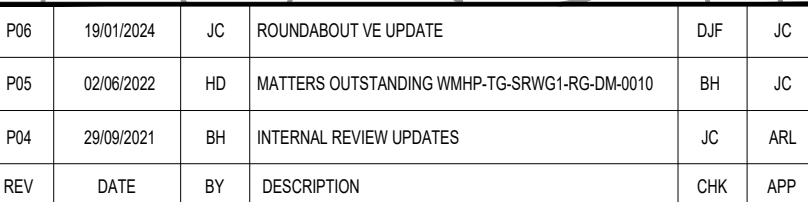
REFER TO DRAWING
WHMP-TG-SRWG1-DR-GE-0651
FOR RETAINING WALL DETAILS

FOR CONTINUATION REFER TO DRAWING

LEGEND

-

N.T.S



S3

CLIENT:







WOKINGHAM
BOROUGH COUNCIL

Shute End, Wokingham, Berkshire RG40 1BN
Tel: (0118) 974 6000 Web: www.wokingham.gov.uk

TITLE: HIGHWAYS
EARTHWORKS
PLAN LAYOUT

CALL @ A1:	CHECKED:		APPROVED:
N/A	SD		RN
PROJECT NO:	DESIGNED:	DRAWN:	DATE:
C118047	SD	PSW	August 21
DRAWING No:			REV:
WMHP-TG-SRWG1-DR-GE-0601			P06

RESIDUAL HAZARD	STAGE	SUGGESTED CONTROL MEASURE	RESIDUAL HAZARD	STAGE	SUGGESTED CONTROL MEASURE	RESIDUAL HAZARD	STAGE	SUGGESTED CONTROL MEASURE
 STRIKING UNDERGROUND SERVICES	D	HAND DIGGING AND CAT SCANNING TECHNIQUES SHALL BE UNDERTAKEN TO LOCATE SERVICES/UTILITIES. MARK UP ON SITE IF REQUIRED. NO WORKS TO BE UNDERTAKEN WITHOUT A VALID PERMIT TO DIG. DIVERTED SERVICES TO BE ACCURATELY RECORDED FOR FUTURE WORKS INCLUDING DECOMMISSIONED PLANT.	 WORKING IN CLOSE PROXIMITY TO WATERCOURSES. EXPOSURE TO HAZARDOUS SUBSTANCES, E.G. LEPTOSPIROSIS.	C/D	CONTRACTOR TO LIAISE WITH THE LEAD LOCAL FLOOD AUTHORITY TO GAIN FLOOD ALERTS. ENSURE WORKFORCE IS SUITABLY TRAINED AND COMPETENT AND ARE WEARING THE APPROPRIATE LEVEL OF PPE FOR THE INTENDED TASK TO REDUCE THE RISK OF WORKERS CONTRACTING LEPTOSPIROSIS OR WELL'S DISEASE.			
 ELECTROCUTION OF OPERATIVES. LARGE PLANT STRIKING OVERHEAD CABLES. SMALL PLANT/EQUIPMENT STRIKING ELECTRICITY Pylon(P)OLE(S).	D/M	ALL OPERATIVES WORKING IN THE VICINITY ARE TO BE AWARE OF THE LOCATION OF OVERHEAD CABLES AND ELECTRICITY Pylon(P)OLE(S) AT ALL TIMES DURING THE WORKS. IF THE EXISTING POSITION REMAINS DURING THE SITE CLEARANCE WORKS. ENSURE THAT THE PROCEDURES SET OUT IN GUIDANCE NOTE G58 AND AGRICULTURE INFORMATION SHEET NO. 8 ARE CARRIED OUT AND A SAFE SYSTEM OF WORKS IS IN PLACE. IF THE SERVICE DIVERSION WORKS TO REDIRECT THE ELECTRICITY CABLES MEAN THAT OVERHEAD CABLES REMAIN POSITIONED IN CLOSE PROXIMITY OF THE WORKS (AS PER GUIDANCE). A SIMILAR PROCEDURE SHOULD BE UNDERTAKEN FOR THE NEW LOCATION(S). TEMPORARY FENCE TO BE ERECTED AROUND Pylon AT 6M FROM ITS BASE TO CREATE EXCLUSION ZONE.	 PLANT/EQUIPMENT STRIKING THE RESTRICTED HEIGHT RAIL UNDERBRIDGE ON PINCHAMSTEAD LANE (NORTH OF THE ROUNDABOUT - 12° (0.3M) AT CENTRE, 99° (0.3M) ABOVE NORTHBOUND LANE (DUE TO ARCH)	C/D	DUE CONSIDERATION SHOULD BE MADE TO ACCESS AND EGRESS FOR LARGE PLANT ENTERING OR LEAVING THE SITE WITH ROBUST PLANNING WITH REGARDS TO TM AND DIVERSIONS TO TRAFFIC BEING RESOLVED WITH THIS IN MIND. APPROPRIATE SIGNAGE SHOULD REMAIN OR TEMPORARY SIGNS ERECTED IN THEIR PLACE AT ALL TIMES IN ACCORDANCE WITH TSM CHAPTER 8.	 GROUND CONDITIONS DIFFER TO THOSE ASSUMED IN DESIGN	C/D/M	ADDITIONAL GROUND INVESTIGATIONS HAVE BEEN UNDERTAKEN WHICH GENERALLY CONFIRM THE DESIGN ASSUMPTIONS. HOWEVER GROUND INVESTIGATIONS HAVE BEEN CARRIED OUT AT DISCRETE POINT LOCATIONS AND IT SHOULD BE NOTED THAT THE NATURE AND CONTINUITY OF THE SUBSURFACE CONDITIONS COULD VARY AWAY FROM THOSE LOCATIONS. IF GROUND CONDITIONS ARE FOUND TO DIFFER FROM THOSE ASSUMED IN THE DESIGN THE CONTRACTOR SHALL INFORM THE DESIGNER (TOWY GEE) IMMEDIATELY.
			 GROUNDWATER LEVELS HIGHER THAN EXPECTED - RESULTING IN SLOPE INSTABILITY	C/D	EXCAVATIONS BELOW GROUNDWATER LEVELS FOR REMOVAL AND REPLACEMENT OF UNSUITABLE MATERIALS (BELOW FOUNDATIONS FOR GRAVITY RETAININGS, SMALLER PAND EMBANKMENTS) ARE OF LIMITED DURATION TO PREVENT EXCESSIVE PONDING OF WATER. CONTRACTOR TO OTHERWISE IMPLEMENT SUITABLE GROUNDWATER MANAGEMENT MEASURES.			

NOTE: The above hazards do not include every hazard or assumption, but identify significant residual construction hazards that are not likely to be obvious to a competent contractor and those that could be difficult to manage effectively. Refer also to the designer's risk documentation.

© Crown copyright and database rights 2018 OS 100005035. You are granted a non-exclusive, royalty free, revocable licence solely to view the Licensed Data for non-commercial purposes for the period during which Tony Gee and Partners LLP makes it available. You are not permitted to copy, sub-license, distribute, sell or otherwise make available the Licensed Data to third parties in any form. Third party rights to enforce the terms of this licence shall be reserved to OS.

