




NOTE: THIS DRAWING IS
TO BE PRINTED IN COLOUR

LEGEND

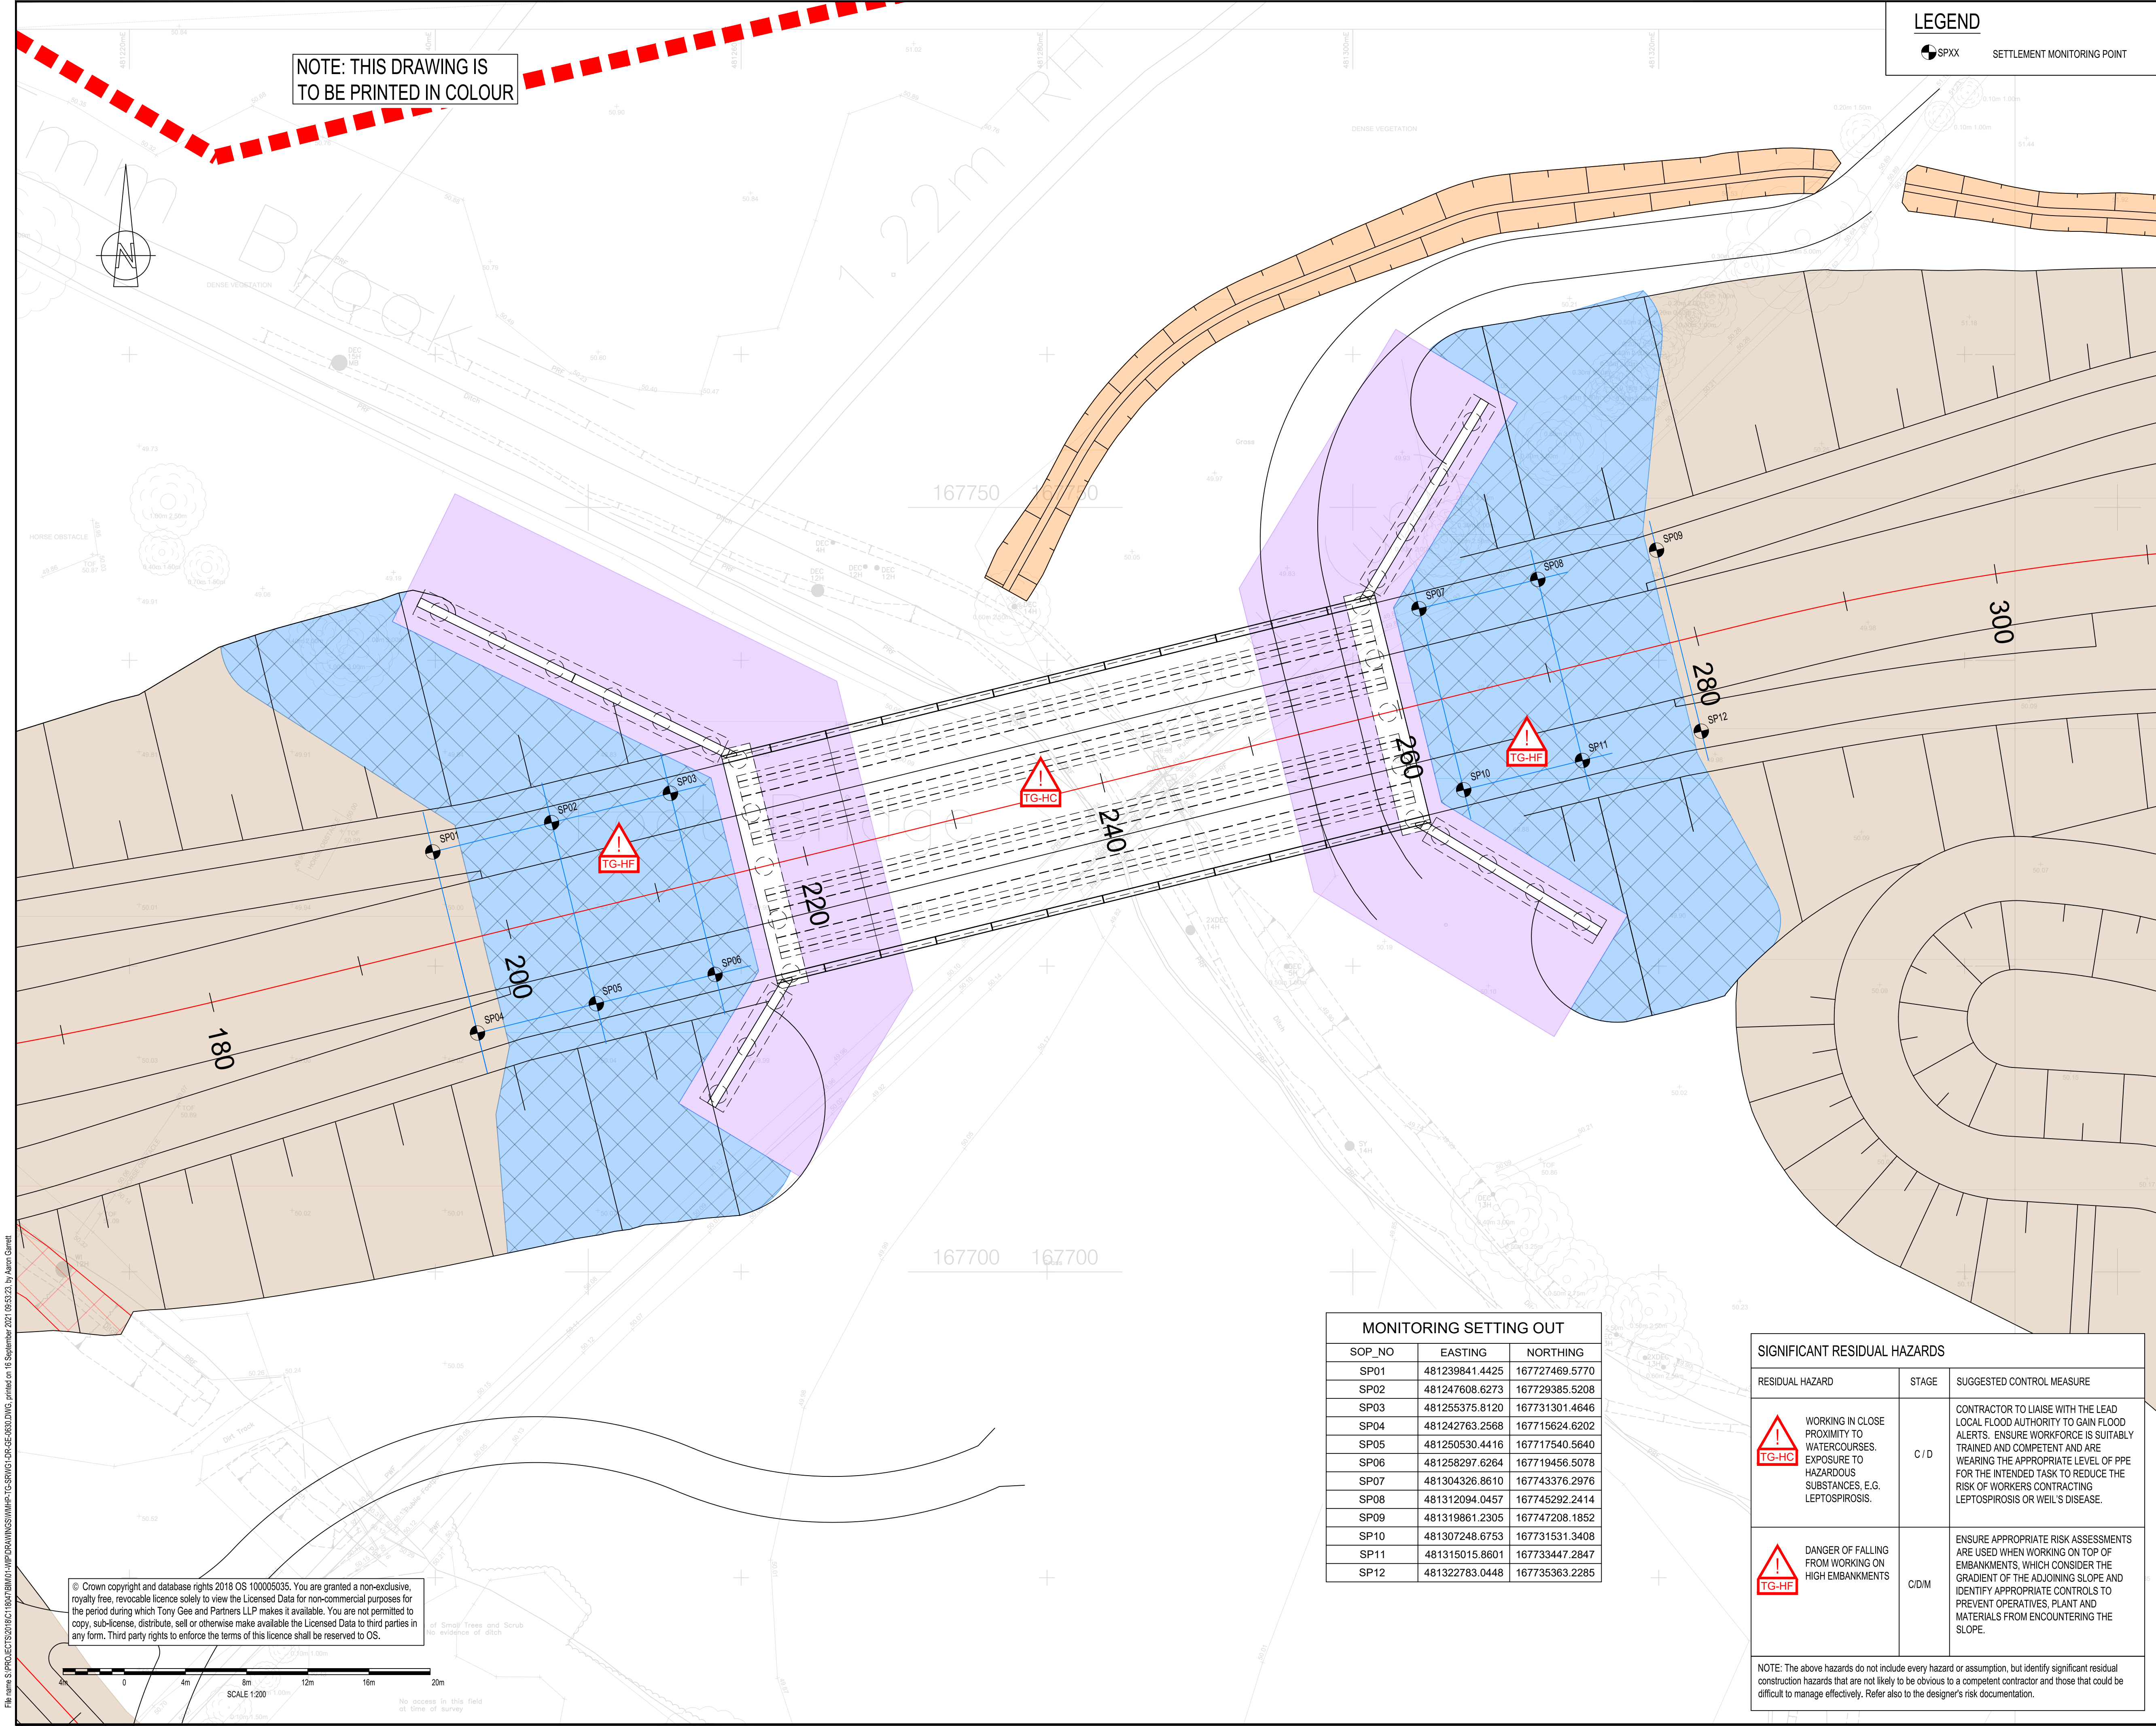

SETTLEMENT MONITORING POINT


DO NOT SCALE

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.
2. ALL LEVELS ARE IN METRES AOD UNLESS NOTED OTHERWISE.
3. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH THE EARTHWORKS SPECIFICATION, (WMHP-TG-SRWG1-SP-GE-0601)
4. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH EARTHWORKS PLAN LAYOUT DRAWINGS, DRG Nos WMHP-TG-SRWG1-DR-GE-0601 to -0609.
5. ALL AREAS TO BE STRIPPED OF TOPSOIL AND MADE GROUND. ADDITIONAL REQUIREMENTS FOR SOFT SPOTS AND OTHER FEATURES. REFER TO WMHP-TG-SRWG1-SP-GE-0601.

LEGEND

- PLANNING APPLICATION NUMBER 192928 BOUNDARY
- AREA OF CUT
- CLASS 2 COHESIVE FILL
- CLASS 6N1
- CLASS 6N
- TRANSITION ZONE CLASS 6N1 GRANULAR FILL AND CLASS 2A COHESIVE FILL
- NEW PAVEMENT OVER EXISTING. REFER TO 700 SERIES DRAWINGS AND SPECIFICATION
- EXISTING DITCH TO BE CLEARED OF ALL SOFT / DEGRADABLE MATERIAL AND BACKFILLED WITH SELECTED GRANULAR FILL IN ACCORDANCE WITH EARTHWORKS SPECIFICATIONS
- REINFORCED EARTH

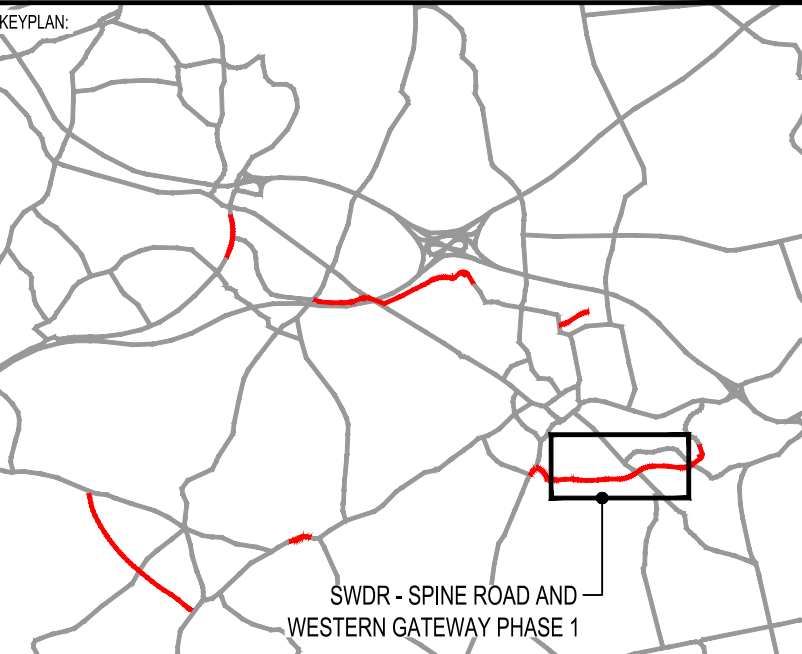


P03	15/09/2021	AWG	UPDATED FOR RETAINING WALL AND REINFORCED EARTH	SD	CJT
P02	20/08/2021	JF	REVISED FOR PLANNING DISCHARGE AND SCD COMMENTS	SD	CMF
P01	06/05/2021	PSW	DETAILED DESIGN ISSUE	SD	RN
REV	DATE	BY	DESCRIPTION	CHK	APP

SUITABLE FOR EXAMINATION

S8

DESIGNER:

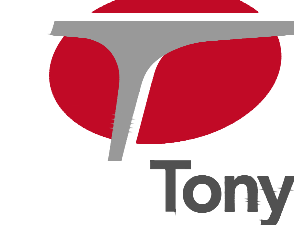

Tony Gee and Partners LLP
Hardy House
140 High Street
Esher, Surrey
KT10 9QJ
Tel: 01372 461600
www.tonygee.com

Consulting Civil, Structural and Geotechnical Engineers

CONTRACTOR:

Balfour Beatty

CLIENT:



**WOKINGHAM
BOROUGH COUNCIL**

Shute End, Wokingham, Berkshire RG40 1BN
Tel: (0118) 974 6000 Web: www.wokingham.gov.uk

PROJECT:

**WOKINGHAM MAJOR HIGHWAYS PROGRAMME
SPINE ROAD AND WESTERN GATEWAY PHASE 1**

TITLE:

**HIGHWAYS
EARTHWORKS
GEOTECHNICAL INSTRUMENTATION LAYOUT PLAN**

SCALE @ A1:

N/A

CHECKED:

DJF

APPROVED:

CMF

PROJECT NO:

C118047

DESIGNED:

DJF

DRAWN:

TCH

DATE:

April 21

DRAWING No:

WMHP-TG-SRWG1-DR-GE-0630

P03

MONITORING SETTING OUT

SOP_NO	EASTING	NORTHING
SP01	481239841.4425	167727469.5770
SP02	481247608.6273	167729385.5208
SP03	481255375.8120	167731301.4646
SP04	481242763.2568	167715624.6202
SP05	481250530.4416	167717540.5640
SP06	481258297.6264	167719456.5078
SP07	481304326.8610	167743376.2976
SP08	481312094.0457	167745292.2414
SP09	481319861.2305	167747208.1852
SP10	481307248.6753	167731531.3408
SP11	481315015.8601	167733447.2847
SP12	481322783.0448	167735363.2285

SIGNIFICANT RESIDUAL HAZARDS

RESIDUAL HAZARD	STAGE	SUGGESTED CONTROL MEASURE
WORKING IN CLOSE PROXIMITY TO WATERCOURSES. EXPOSURE TO HAZARDOUS SUBSTANCES, E.G. LEPTOSPIROSIS.	C/D	CONTRACTOR TO LIAISE WITH THE LEAD LOCAL FLOOD AUTHORITY TO GAIN FLOOD ALERTS. ENSURE WORKFORCE IS SUITABLY TRAINED AND COMPETENT AND ARE WEARING THE APPROPRIATE LEVEL OF PPE FOR THE INTENDED TASK TO REDUCE THE RISK OF WORKERS CONTRACTING LEPTOSPIROSIS OR WEIL'S DISEASE.
DANGER OF FALLING FROM WORKING ON HIGH EMBANKMENTS	C/D/M	ENSURE APPROPRIATE RISK ASSESSMENTS ARE USED WHEN WORKING ON TOP OF EMBANKMENTS, WHICH CONSIDER THE GRADIENT OF THE ADJOINING SLOPE AND IDENTIFY APPROPRIATE CONTROLS TO PREVENT OPERATIVES, PLANT AND MATERIALS FROM ENCOUNTERING THE SLOPE.

NOTE: The above hazards do not include every hazard or assumption, but identify significant residual construction hazards that are not likely to be obvious to a competent contractor and those that could be difficult to manage effectively. Refer also to the designer's risk documentation.