


Timber Vertical Slider - Sash Window - Weights and Cords

SPEC. CONFIRMED: ☐

Viewed from outside

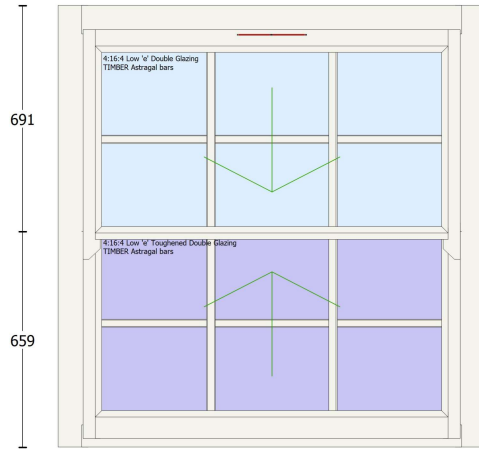


Location and frame size:	Front left bed 36 1220mm x 1350mm
Frame/Sash joints:	Mechanical Joints
Equal glass widths:	No
Material :	146 Standard
Finish Type :	Matt
External/Internal Frame Finish:	RAL9010 White / RAL9010 White
Frame type:	146 Standard
Outer Frame Cill:	Projecting
Projecting Cill size:	70.0
Sash horns:	H6
Ironmongery:	Polished Chrome
D Handle:	Not required
Catch:	Traditional
Restrictors:	Angel
Cill Locks:	Not required
Sash lifts:	Two
Ring pulls:	One
Deep Bottom Rail:	80mm
Room ventilation:	Required - White MAX Trickle vent
PEFC Timber:	Not requested
Glazing Style:	TIMBER Astragal bars (RAL9010 White RAL9010 White Ogee)
Glazing unit makeup: 4:16:4 Low 'e' Double Glazing Clear White - 9016 Warmedge spacer	
4:16:4 Low 'e' Toughened Double Glazing Clear White - 9016 Warmedge	
Brickwork:	Not applicable
Plastering:	Not applicable
Scalloped lead under window:	Not applicable
Internal threshold board:	
Internal liners / architrave:	Included - pine/MDF
Remove tiled cill	No

Notes:

Timber Vertical Slider - Sash Window - Weights and Cords

SPEC. CONFIRMED: ☐

Viewed from outside

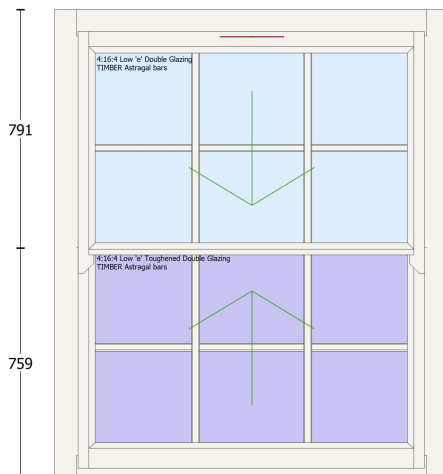


Location and frame size:	Front left ground 36 1220mm x 1550mm
Frame/Sash joints:	Mechanical Joints
Equal glass widths:	No
Material :	146 Standard
Finish Type :	Matt
External/Internal Frame Finish:	RAL9010 White / RAL9010 White
Frame type:	146 Standard
Outer Frame Cill:	Projecting
Projecting Cill size:	70.0
Sash horns:	H6
Ironmongery:	Polished Chrome
D Handle:	Not required
Catch:	Traditional
Restrictors:	Angel
Cill Locks:	Not required
Sash lifts:	Two
Ring pulls:	One
Deep Bottom Rail:	80mm
Room ventilation:	Required - White MAX Trickle vent
PEFC Timber:	Not requested
Glazing Style:	TIMBER Astragal bars (RAL9010 White RAL9010 White Ogee)
Glazing unit makeup: 4:16:4 Low 'e' Double Glazing Clear White - 9016 Warmedge spacer	
4:16:4 Low 'e' Toughened Double Glazing Clear White - 9016 Warmedge	
Brickwork:	Not applicable
Plastering:	Not applicable
Scalloped lead under window:	Not applicable
Internal threshold board:	
Internal liners / architrave:	Included - pine/MDF
Remove tiled cill	No

Notes:

Timber Vertical Slider - Sash Window - Weights and Cords

SPEC. CONFIRMED: ☐

Viewed from outside

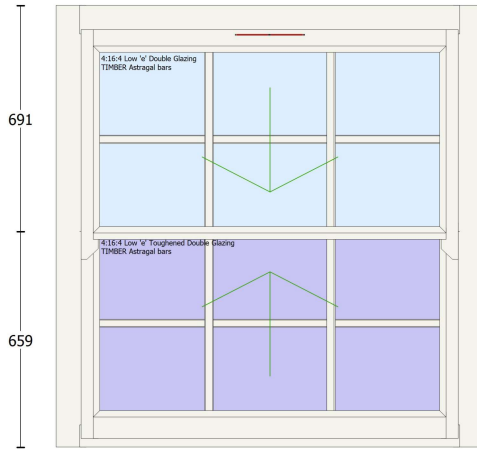

Location and frame size:	Front right bed 38 1220mm x 1350mm
Frame/Sash joints	Mechanical Joints
Equal glass widths:	No
Material :	146 Standard
Finish Type :	Matt
External/Internal Frame Finish:	RAL9010 White / RAL9010 White
Frame type:	146 Standard
Outer Frame Cill:	Projecting
Projecting Cill size:	70.0
Sash horns:	H6
Ironmongery:	Polished Chrome
D Handle:	Not required
Catch:	Traditional
Restrictors:	Angel
Cill Locks:	Not required
Sash lifts:	Two
Ring pulls:	One
Deep Bottom Rail:	80mm
Room ventilation:	Required - White MAX Trickle vent
PEFC Timber:	Not requested
Glazing Style:	TIMBER Astragal bars (RAL9010 White RAL9010 White Ogee)
Glazing unit makeup:	4:16:4 Low 'e' Double Glazing Clear White - 9016 Warmedge spacer 4:16:4 Low 'e' Toughened Double Glazing Clear White - 9016 Warmedge
Brickwork:	Not applicable
Plastering:	Not applicable
Scalloped lead under window:	Not applicable
Internal threshold board:	
Internal liners / architrave:	Included - pine/MDF
Remove tiled cill	No

Notes:

Timber Vertical Slider - Sash Window - Weights and Cords

SPEC. CONFIRMED: ☐

Viewed from outside




Location and frame size:	Front right ground 38 1220mm x 1550mm
Frame/Sash joints	Mechanical Joints
Equal glass widths:	No
Material :	146 Standard
Finish Type :	Matt
External/Internal Frame Finish:	RAL9010 White / RAL9010 White
Frame type:	146 Standard
Outer Frame Cill:	Projecting
Projecting Cill size:	70.0
Sash horns:	H6
Ironmongery:	Polished Chrome
D Handle:	Not required
Catch:	Traditional
Restrictors:	Angel
Cill Locks:	Not required
Sash lifts:	Two
Ring pulls:	One
Deep Bottom Rail:	80mm
Room ventilation:	Required - White MAX Trickle vent
PEFC Timber:	Not requested
Glazing Style:	TIMBER Astragal bars (RAL9010 White RAL9010 White Ogee)
Glazing unit makeup:	4:16:4 Low 'e' Double Glazing Clear White - 9016 Warmedge spacer 4:16:4 Low 'e' Toughened Double Glazing Clear White - 9016 Warmedge
Brickwork:	Not applicable
Plastering:	Not applicable
Scalloped lead under window:	Not applicable
Internal threshold board:	
Internal liners / architrave:	Included - pine/MDF
Remove tiled cill	No

Notes:

Timber Entrance Door - Opening In

SHC. CONFIRMED: ☐

Viewed from outside

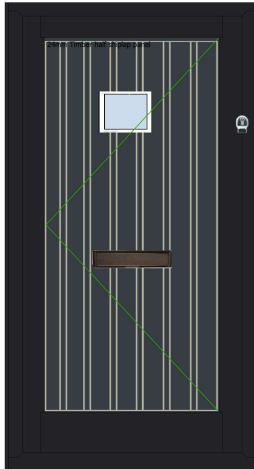


Location and frame size:	36 front door 980mm x 1950mm
Frame/Sash joints	Mechanical Joints
Equal glass widths:	No
Material :	
Finish Type :	Matt
External/Internal Frame Finish:	RAL9005 Black / RAL9010 White
Opening:	Open In - Hinged As Existing
External/Internal Sash Finish:	RAL9005 Black / RAL9010 White
Outer frame cill :	C - Std + 65mm extension (159mm)
Subsill:	Not applicable
Handle/Lock type :	Satin Chrome Escutcheon Plate Finger Pull/Thumb Turn -
Split Spindle :	Not required
Integral night latch :	Not required
Pull Knob :	Not required-0.0mm
Hinges :	Satin Chrome
House Number	Not Required
Room ventilation	Front Door - Exempt
Letterplate:	Knocker:
PEFC Timber:	Not requested
Glazing Style:	
PAS 24:	No
Glazing unit makeup:	
Brickwork:	Not applicable
Plastering:	Not applicable
Scalloped lead under window:	Not applicable
Internal threshold board:	
Internal liners / architrave:	None

Notes:

Timber Entrance Door - Opening In

SHC. CONFIRMED: ☐

Viewed from outside

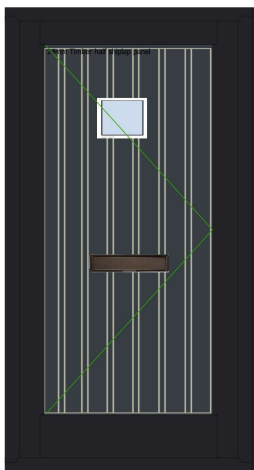

Location and frame size:	36 front door 980mm x 1950mm
Frame/Sash joints	Mechanical Joints
Equal glass widths:	No
Material :	
Finish Type :	Matt
External/Internal Frame Finish:	RAL9005 Black / RAL9010 White
Opening:	Open In - Hinged As Existing
External/Internal Sash Finish:	RAL9005 Black / RAL9010 White
Outer frame cill :	C - Std + 65mm extension (159mm)
Subsill:	Not applicable
Handle/Lock type :	Satin Chrome Escutcheon Plate Finger Pull/Thumb Turn -
Split Spindle :	Not required
Integral night latch :	Not required
Pull Knob :	Not required-0.0mm
Hinges :	Satin Chrome
House Number	Not Required
Room ventilation	Front Door - Exempt
Letterplate:	Knocker:
PEFC Timber:	Not requested
Glazing Style:	
PAS 24:	No
Glazing unit makeup:	
Brickwork:	Not applicable
Plastering:	Not applicable
Scalloped lead under window:	Not applicable
Internal threshold board:	
Internal liners / architrave:	None

Notes: