


SIGNIFICANT RESIDUAL HAZARDS		
RESIDUAL HAZARD	STAGE	SUGGESTED CONTROL MEASURE
 WORKING IN CLOSE PROXIMITY TO WATERCOURSES. EXPOSURE TO HAZARDOUS SUBSTANCES	C, D	CONTRACTOR TO LIAISE WITH THE LEAD LOCAL FLOOD AUTHORITY TO GAIN FLOOD ALERTS. ENSURE WORKFORCE IS SUITABLY TRAINED AND COMPETENT AND ARE WEARING THE APPROPRIATE LEVEL OF PPE FOR THE INTENDED TASK TO REDUCE THE RISK OF WORKERS CONTRACTING LEPTOSPIROSIS OR WEIL'S DISEASE.
 WORKING IN ECOLOGICALLY SENSITIVE AREA	C, D	CONSTRUCTION ACTIVITIES WILL BE DIRECTLY ADJACENT TO AN EXISTING WATERCOURSE. CONTRACTOR'S METHOD STATEMENT TO CONSIDER THE RISK OF WORKING ADJACENT TO EXISTING WATERCOURSE TO ENSURE WASTE IS NOT INADVERTENTLY DIRECTED INTO WATERCOURSE. CONTRACTOR TO LIAISE WITH THE LEAD LOCAL FLOOD AUTHORITY TO GAIN FLOOD ALERTS. ENSURE WORKFORCE IS SUITABLY TRAINED AND COMPETENT AND ARE WEARING THE APPROPRIATE LEVEL OF PPE FOR THE INTENDED TASK TO REDUCE THE RISK OF WORKERS CONTRACTING LEPTOSPIROSIS OR WEIL'S DISEASE.
 WORKING AT HEIGHT ON TOP OF BRIDGES	C, M	ENSURE APPROPRIATE RISK ASSESSMENTS ARE USED WHEN WORKING ON TOP OF BRIDGES, WHICH SHOULD IDENTIFY MITIGATION MEASURES SUCH AS FALL RESTRAINT SYSTEMS, DROP ZONE CONTROL AND MEASURE TO PREVENT OBJECTS FROM FALLING FROM THE BRIDGE.
NOTE: The above hazards do not include every hazard or assumption, but identify significant residual construction hazards that are not likely to be obvious to a competent contractor and those that could be difficult to manage effectively. Refer also to the designer's risk documentation.		


LEGEND	
	PLANNING APPLICATION 192328 RED LINE BOUNDARY
	POST AND RAIL (SEE DRAWING WMHP-TG-SRWG1-DR-HI-0322)
	POST AND RAIL + DOG MESH (SEE DRAWING WMHP-TG-SRWG1-DR-HI-0321)
	POST AND RAIL + WILDLIFE MESH (SEE DRAWING WMHP-TG-SRWG1-DR-HI-0321)
	4m WIDE SINGLE LEAF DRB P51 HEAVY DUTY TRAFFIC GATE WITH HEAVY DUTY LOCK BOX AND METAL MESH WELDED TO THE GATE FRAME, OR, APPROVED EQUIVALENT, ACCORDING TO MANUFACTURERS INSTALLATION REQUIREMENTS.
	ASTON 2 WAY GATE WITH EASY LATCH AND 180 DEGREE SELF CLOSING, OR APPROVED EQUIVALENT, WITHOUT WILDLIFE MESH
	ASTON 2 WAY GATE WITH EASY LATCH AND 180 DEGREE SELF CLOSING, OR APPROVED EQUIVALENT, WITH WILDLIFE MESH
	4.521m WIDE DOUBLE LEAF BAYWOOD HARDWOOD PRIVATE ACCESS GATE BY GATES AND FENCES UK OR, APPROVED EQUIVALENT, ACCORDING TO MANUFACTURERS INSTALLATION REQUIREMENTS.
	0.914m WIDE SINGLE LEAF BAYWOOD HARDWOOD PRIVATE SIDE GATE BY GATES AND FENCES UK OR, APPROVED EQUIVALENT, ACCORDING TO MANUFACTURERS INSTALLATION REQUIREMENTS.
	ACO CLIMATE TUNNEL GUIDE WALL (REFER TO MANUFACTURER FOR DETAILS)
	ACO CLIMATE TUNNEL (REFER TO MANUFACTURER FOR DETAILS)

DO NOT SCALE

NOTES:
1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.
2. ALL LEVELS ARE IN METRES AOD UNLESS NOTED OTHERWISE.
3. FOR DETAILS OF PARAPETS AND SAFETY BARRIER SEE DRAWING WMHP-TG-SRWG1-DR-HI-0401 ONWARDS.
4. DRAWING TO BE READ IN CONJUNCTION WITH SPECIFICATION REFERENCE WMHP-TG-SRWG1-SP-HI-0301.
5. FOR UTILITY INFORMATION REFER TO WMHP-WSP-SR-DR-UT-0001 RECEIVED 04.02.2020

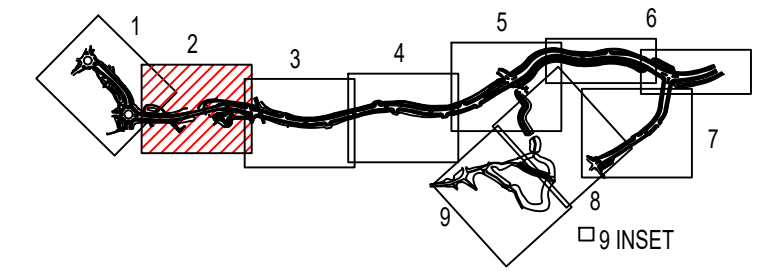

SHEET LOCATION PLAN
N.T.S.

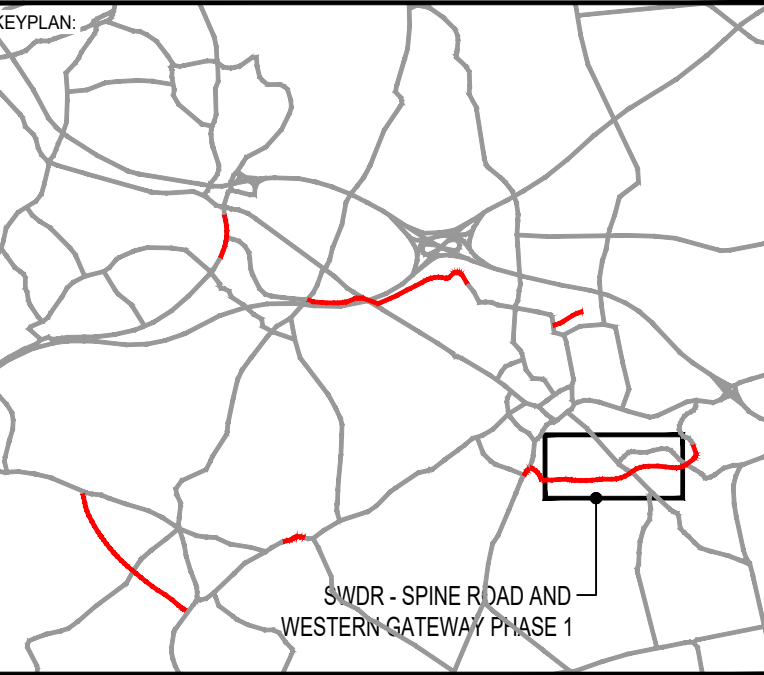KEYPLAN:					
P07	08/10/2025	MH	REVISED ACCESS TO NORTHERN FIELD	DJF	JC
P06	28/01/2024	MH	REVISED FOR PLANNING DISCHARGE	DJF	JC
P05	02/06/2022	HD	MATTERS OUTSTANDING WMHP-TG-SRWG1-RG-DM-0010	BH	JC
REV	DATE	BY	DESCRIPTION	CHK	APP

DRAWING STATUS:
SUITABLE FOR REVIEW & COMMENT S3

DESIGNER:



Tony Gee
Consulting Civil, Structural and Geotechnical Engineers

Tony Gee and Partners LLP

Hardy House
140 High Street
Esher, Surrey
KT10 9QJ
Tel: 01372 461600

www.tonygee.com

CLIENT:



WOKINGHAM
BOROUGH COUNCIL

Shute End, Wokingham, Berkshire RG40 1BN
Tel: (0118) 974 6000 Web: www.wokingham.gov.uk

PROJECT:

SPINE ROAD AND WESTERN GATEWAY PHASE 1

TITLE:

HIGHWAYS
FENCING
PLAN LAYOUT

SHEET2

SCALE @ A1:	CHECKED:	APPROVED:
1:500	DJF	JC
PROJECT NO:	DESIGNED:	DRAWN:
C118047	ALM	TCH
DATE:	APRIL 21	
DRAWING No:	REV:	
WMHP-TG-SRWG1-DR-HI-0302	P07	

File name: S:\PROJECTS\2018\C118047\BIM\01-WP\DRAWINGS\WMHP-TG-SRWG1-DR-HI-0302.DWG, printed on 08 October 2024, 18:32:42, by David Frampton

© Crown copyright and database rights 2018 OS 100005035. You are granted a non-exclusive, royalty free, revocable licence solely to view the Licensed Data for non-commercial purposes for the period during which Tony Gee and Partners LLP makes it available. You are not permitted to copy, sub-license, distribute, sell or otherwise make available the Licensed Data to third parties in any form. Third party rights to enforce the terms of this licence shall be reserved to OS.