


SIGNIFICANT RESIDUAL HAZARDS		
RESIDUAL HAZARD	STAGE	SUGGESTED CONTROL MEASURE
WORKING IN CLOSE PROXIMITY TO WATERCOURSES. EXPOSURE TO HAZARDOUS SUBSTANCES 	C,D	Contractor to liaise with the lead local flood authority to gain flood alerts. Ensure workforce is suitably trained and competent and are wearing the appropriate level of PPE for the intended task to reduce the risk of workers contracting leptospirosis or well's disease.
WORKING IN ECOLOGICALLY SENSITIVE AREA 	C,D	Construction activities will be directly adjacent to existing watercourse. Contractor's method statement to consider the risk of working adjacent to existing watercourse to ensure waste is not inadvertently directed into watercourse. Contractor to liaise with the lead local flood authority to gain flood alerts. Ensure workforce is suitably trained and competent and are wearing the appropriate level of PPE for the intended task to reduce the risk of workers contracting leptospirosis or well's disease.
NOTE: The above hazards do not include every hazard or assumption, but identify significant residual construction hazards that are not likely to be obvious to a competent contractor and those that could be difficult to manage effectively. Refer also to the designer's risk documentation.		
Prior to undertaking any planting works beneath or adjacent to overhead or underground power lines, the contractor must ensure they are satisfied with all guidance relating to tree planting, specifically regarding tree height clearance requirements. The following guidance should be considered: - National Grid Guidance: Design Guidelines for Development Near High Voltage Overhead Lines; and - Scottish & Southern Electricity Networks: Guidance for Third Parties Working Near SSEN Transmission Asset. The works contractors must ensure proper safety measures are in place and coordinated with the relevant authorities to mitigate risks during construction.		

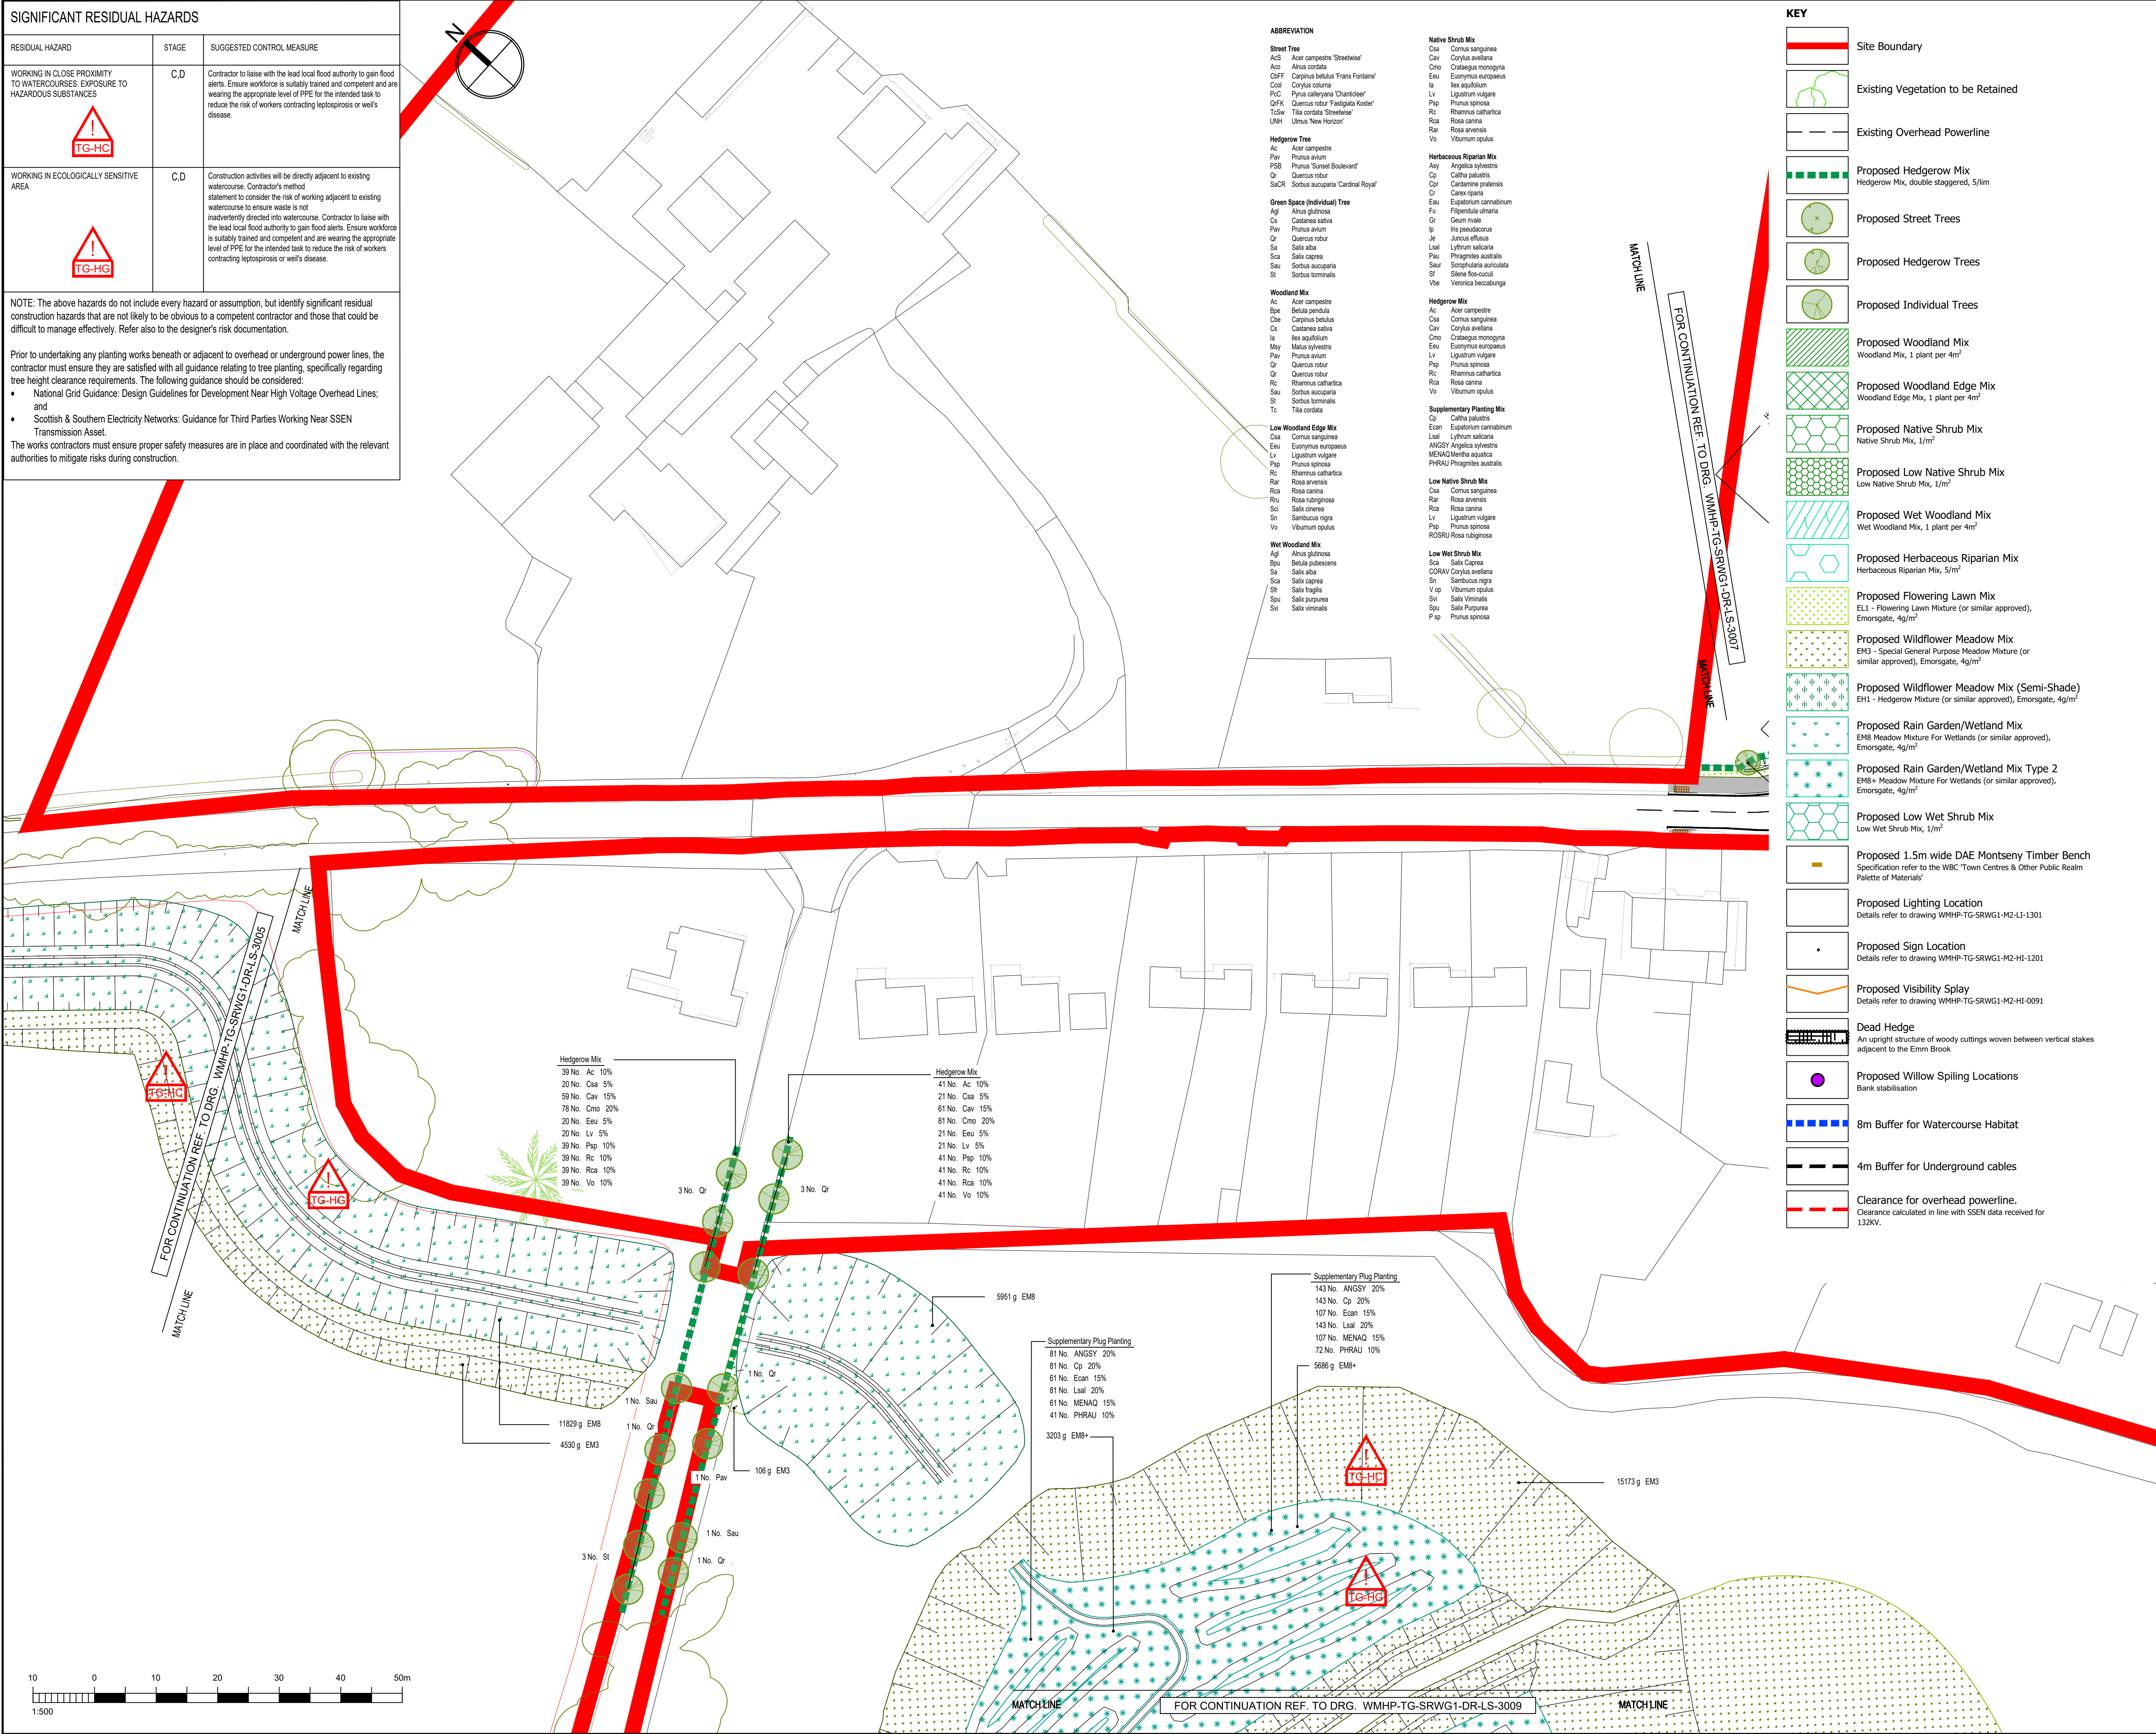

DO NOT SCALE

- TREE PIT CONSTRUCTION DETAILS REFER TO DRAWINGS WMHP-TG-SRWG1-DR-LS-3010 - 3011
- ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.
- ALL LEVELS ARE IN METRES AOD UNLESS NOTED OTHERWISE.
- REFER TO THE 500 SERIES FOR LEVEL INFORMATION
- FENCE DETAILS REFER TO DRAWINGS WMHP-TG-SRWG1-DR-LS-3001 - 3009
- ROAD RESTRAINT SYSTEMS REFER TO DRAWINGS WMHP-TG-SRWG1-DR-HI-0401 - 0409 AND 0421
- ALL NEW AND EXISTING SHRUB PLANTING, TREES AND VEGETATION TO BE PRUNED AND MAINTAINED IN PERPETUITY TO ALLOW FULL VISIBILITY OF ROAD SIGNAGE

SITE LOCATION PLAN

SCALE: 1:25000

KEYPLAN

SPINE ROAD AND WESTERN GATEWAY

REV	DATE	BY	DESCRIPTION	CHK	APP
P11	13/05/2025	NJ	REVISED TO MEET LAP AND STAKE HOLDERS COMMENTS	JC	JC
P10	07/05/2025	NJ	REVISED TO MEET LPA COMMENTS	JC	JC
P09	07/02/2025	LC	REVISED TO INCL ADD. HEDGE & TREE PLANTING	JC	JC

DRAWING STATUS: **FOR REVIEW & COMMENT** **S3**

DESIGNER:



Tony Gee
Consulting Civil, Structural and Geotechnical Engineers

www.tonygee.com

Tony Gee and Partners LLP
Hardy House
140 High Street
Esher, Surrey
KT10 9QU
Tel: 01372 461600

CLIENT:



WOKINGHAM BOROUGH COUNCIL

Shute End, Wokingham, Berkshire RG40 1BN
Tel: (0118) 974 6000 Web: www.wokingham.gov.uk

PROJECT:

SPINE ROAD AND WESTERN GATEWAY PHASE 1

TITLE:

HIGHWAYS
SOFT LANDSCAPING PLANTING PLAN

SHEET 8

SCALE @ A1:	CHECKED:	APPROVED:
1:500	JC	JC
PROJECT NO:	DESIGNED:	DRAWN:
C118047	WM	WM
DRAWING NO:	DATE:	REV:
WMHP-TG-SRWG1-DR-LS-3008	May 25	P11