




Wildlife Corridor
Bare root plants to be planted 45-60cm tall in 5m centres and grown on as shrubs to provide shelter, habitat and food for a wide range of wildlife
10% Corylus avellana
10% Sambucus nigra
5% Salix caprea
10% Crataegus monogyna
2.5% Rosa canina
2.5% Ilex aquifolium
10% Viburnum opulus
10% Viburnum lantana
10% Ligustrum vulgare
10% Prunus spinosa
10% Cornus sanguinea
10% Euonymus europaeus

Planting to fronts of Plot 6 - 8 -
In each plot split between beds:
4 x Taxus baccata 40cm Ball
2 x Daphne odora Aureomarginata 5L
1 x Pittosporum Silver Ball 10L
3 x Abelia grandiflora Confetti 10L
6 x Lavandula Hidcote 5L
3 x Hebe fran. Blue Gem 5L
3 x Euonymous Emerald Gaiety 10L
3 x Hebe Sutherlandii 5L
3 x Choisya ternata 5L

Planting to fronts of Plot 4 and 5
In each plot split between beds:
4 x Taxus baccata 40cm Ball
2 x Daphne odora Aureomarginata 5L
3 x Cistus Silver Pink 5L
3 x Lavandula Hidcote 5L
3 x Choisya ternata 5L
3 x Hebe sutherlandii 5L
3 Euonymous Emerald Gaiety

Planting to fronts of Plots 1 - 3
In each plot to be split between beds:
4 x Taxus baccata 40cm Ball
2 x Daphne odora Aureomarginata 5L
3 x Viburnum tinus 10L
3 x Euonymous fortunei Silver Queen 5L
3 x Choisya ternata
3 x Hebe Sutherlandii

- Notes**
- All plant material to be compatible with British Standard 3936 part 1. 1992 specifications - 'Nursery Stock'
 - All soft landscaping work/planting to be compatible with British Standard 4428 specifications 1989 - Landscape Operations
 - All planting areas to be completely cleared of grass, weeds, debris and stones/concrete etc exceeding 50mm dia.
Soil in all scheduled planting areas outside existing canopy spreads of trees that has compacted/denatured/contaminated during work on the site, to be excavated to a minimum depth of 50mm.
 - All planting areas to be cultivated to a minimum depth of 500mm and topdressed with an organic slow release fertilizer such as sterilised bonemeal.
 - No peat products used.
 - All planting areas around trees and shrubs to receive a 70mm layer (minimum) of seasoned medium grade chipped bark mulch, upon completion of planting.
Tree pits shall be of a diameter 600mm greater than the rootball. The depth of the pit shall be 225mm deeper than the rootball and not less than 600mm deep. The top soil shall be stripped from the area of the pit and stascked for re-use; the sub-soil is to be excavated and removed from the site. the base of the put shall be forked over to a depth of 225mm and left with a slightly higher centre to permit drainage.
All trees to be single staked and tied including the use of 1 spacer block per tree. Trees of 14-16cm girth and above should be double staked, one on either side of the trunk. Stakes not to extend more than 600mm above ground level. Stakes should be positioned on the windward side of the tree.
 - An area of 1.5m wide (minimum) to be left free of all grass turf, weed growth, scrub vegetation, etc. around the bases of all newly planted trees situated within grassed areas and mulched as specified above.
 - All non-specified areas to be turfed with good quality seed grown turf.

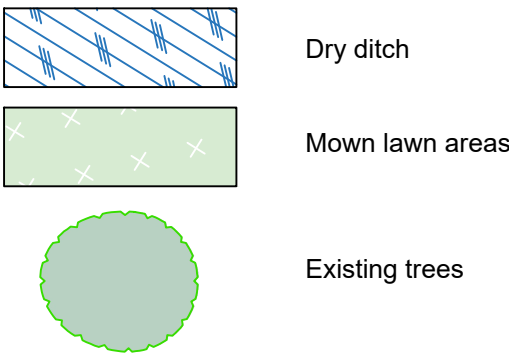


Plant Schedule

New Trees to be planted
All size 12-14cmg. container grown or RB depending on availability

Qty	Plant Name	KEY
3	Acer campestre	Ac
5	Acer campestre Elsrijk	AcE
9	Betula pendula	Bp
3	Carpinus betulus	Cb
12	Malus domestica	Md
2	Quercus robur	Qr
6	Sorbus aria	Sa
3	Sorbus aucuparia	Sau
7	Sorbus torminalis	St
5	Tilia platyphyllos	Tp


Planting to front of houses

- 3 Abelia grandiflora Confetti 10L
- 9 Choisya ternata 5L
- 3 Cistus Silver Pink 5L
- 6 Daphne odora Aureomarginata 5L
- 6 Euonymous Emerald Gaiety 10L
- 3 Euonymous fortuneii Silver Queen 5L
- 3 Hebe fran. Blue Gem 5L
- 9 Hebe sutherlandii 5L
- 9 Lavandula Hidcote 5L
- 1 Pittosporum Silver Ball 10L
- 12 Taxus baccata 40cm Ball
- 3 Viburnum tinus 10L




Native Hedge Mix - approx 430m

- 50% Crataegus monogyna
- 10% Corylus avellana
- 10% Acer campestre
- 10% Ligustrum vulgare
- 10% Prunus spinosa
- 10% Carpinus betulus



Wildflower Seeded Areas - to be seeded as per supplier instructions

Wildlife Area - approx 2100sqm - to be seeded with EW1F Wild Flowers for Woodland - Supplied by Emorsgate



Wildlife Corridor - approx 3200sqm - to be seeded with EH1 Hedgrow Mixture (contains grasses and wildflowers) - Supplied by Emorsgate



Treetop Landscapes Ltd

1 Northbury Cottages, Castle End Road,
Ruscombe, Berkshire, RG10 9XJ
(0118)9344132
nick@treetoplandscapes.co.uk
fiona@treetoplandscapes.co.uk

Palatine Homes - Land at Johnsons Drive, Finchamstead

Date: 25/03/2025

Scale: 1:500 @ A1

Drawing No: TTL-SM-PHJD2102001

Rev F