



BUILDING DESIGN PARTNERSHIP SHALL HAVE NO RESPONSIBILITY FOR ANY USE MADE OF THIS DOCUMENT OTHER THAN FOR THAT WHICH IT WAS PREPARED AND ISSUED.

ALL DIMENSIONS SHOULD BE CHECKED ON SITE.

DO NOT SCALE FROM THIS DRAWING

ANY DRAWING ERRORS OR DIVERGENCIES SHOULD BE BROUGHT TO THE ATTENTION OF BUILDING DESIGN PARTNERSHIP AT THE ADDRESS SHOWN BELOW.

DRAWINGS SHALL BE READ IN CONJUNCTION WITH THE FOLLOWING BEFORE WORK COMMENCES:

- THE CDM DESIGN ISSUES REGISTER
- THE BDP RISK SERIES OF DRAWINGS
- THE PROJECT CDM RISK REGISTER

- ### NOTES
- REFER TO THE LANDSCAPE ARCHITECTS DRAWINGS AND SPECIFICATIONS FOR PAVING FINISHES AND THE LOCATIONS OF EXTERNAL FURNITURE ETC.
  - REFER TO CIVIL ENGINEERING DRAWING ECMWF-BDP-ZZ-ZZ-DR-C-000403 FOR SUBBASE DETAILS

KEY:

— PLANNING APPLICATION BOUNDARY


PROPOSED PAVING TYPES:

- NSP1** MARSHALLS MODAL X PAVING 600 X 300 X 80mm SILVERY GREY GRANITE - TEXTURED
- NSP2** MARSHALLS MODAL X SETTS 100 X 100 X 80mm SILVER GREY GRANITE - TEXTURED
- CS** MARSHALLS MODAL X PAVING 300 X 200 X 80mm SILVER GREY (80%) MID GREY (20%) GRANITE - TEXTURED
- CS** TOBERMORE BRAEMER ALTO SILVER - TEXTURED CONCRETE FLAGS TO FOOTWAYS 600 X 300 X 80mm D
- PB** PERMEABLE BLOCK 210 X 105 X 100mm D
- AT** HOT ROLLED ASPHALT
- RBG** RESIN BOUND GRAVEL
- RBG** RESIN BOUND GRAVEL WITH CELLWEB
- BL** BLISTER SURFACE

PROPOSED KERBING AND EDGING:

K1A - 150(w)125mm exposed upstand Concrete Kerb  
~~K1B - 150mm(w) Concrete Transition Kerb~~  
K1C - 150mm(w) flush PC Concrete Kerb (drop kerb)  
K5 - 50mm(w) flush Concrete Pin Kerb, flat top 50(w)x250(d) 915mm(l)  
K4 - Flush Metal Edge (Kinley)  
K5 - 665(h)x300mm(w) Granite Edge  
K6 - 438(h)x300mm(w) Granite Edge  
K7 - 665(h)x500mm(w) Granite Edge  
K8 - 300(h)x250mm(w) Granite Edge  
K5T - 565mm high to 0mm (flush) Transition Granite Edge

|                                     |     |    |          |
|-------------------------------------|-----|----|----------|
| P11 - STAGE 4 MATERIAL UPDATES      | SM  | LJ | 11/10/24 |
| P10 - STAGE 4 MATERIAL UPDATES      | SM  | LJ | 10/10/24 |
| P09 - STAGE 4 SECURITY CHANGE ISSUE | JD  | LJ | 13/09/24 |
| P08 - FOR PLANNING                  | GM  | SR | 22/07/24 |
| P07 - STAGE 4 REDESIGN              | GM  | SR | 27/06/24 |
| P06 - STAGE 4 FINAL                 | GM  | SR | 10/05/24 |
| P05 - STAGE 4 ISSUE                 | GM  | SR | 20/03/24 |
| P04 - STAGE 4 COSTING WIP ISSUE     | GM  | SR | 16/02/24 |
| P03 - STAGE 4 COSTING WIP ISSUE     | SPB | SR | 19/01/24 |
| P02 - STAGE 3 ISSUE                 | GM  | TK | 20/10/23 |
| P01 - WIP FOR COSTING               | GM  | TK | 09/10/23 |

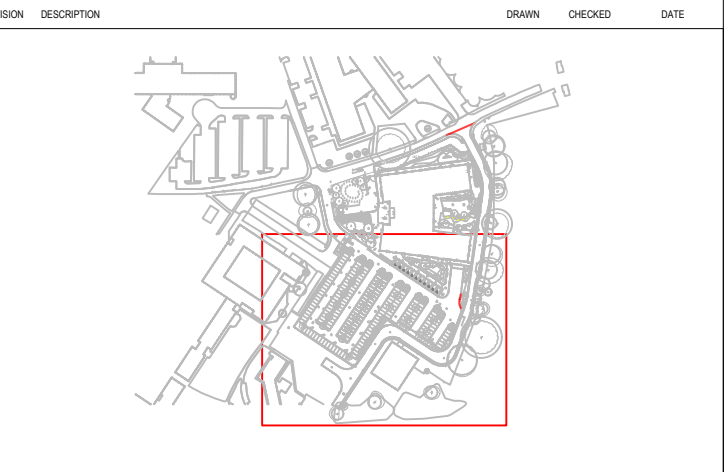

**BDP.**

16 Brewhouse Yard  
Clerkenwell  
London  
EC1V 4LJ  
United Kingdom

T +44 (0)20 7812 8000  
www.bdp.com

|                   |                           |
|-------------------|---------------------------|
| PROJECT TITLE     | ECMWF                     |
| BDP JOB NUMBER    | P3002898                  |
| DRAWING TITLE     | PAVEMENT/SURFACING LAYOUT |
| STATUS            | S(4)                      |
| DATE FIRST ISSUED | 09/10/23                  |
| ISSUED BY         | P11                       |
| DATE              | 09/10/23                  |
| SCALE             | @ A1<br>1:250             |
| SHEET             | 2 OF 2                    |