

Dwg. No. 853

-01 Existing Plan & Elevations

-02 Proposed Plans & Elevations

-03 Block Plan new/existing

KEY

New standard tree planting to BS 3396-1:11 Specification for Nursery Stock - with stake and ties, 75mm surround of bark mulch to tree pit and perforated plastic irrigation pipe

Root Protection Areas of existing trees to remain

New hedge/shrub planting with stakes & ties as required, 75mm surround of bark mulch, comprising moderate condition native scrub mixture :

Hazel Corylus avellana
Blackthorn Prunus spinosa
Hawthorn Crataegus monogyna
Dog rose Rosa canina
Honeysuckle Lonicera periclymenum
Spindle Euryonymus europaeus
Field maple Acer campestre
Holly Ilex aquilifolium
Dog wood Cornus sanguinea

Wildflower seed mix from:

Anthyllus vulneraria,Chrysanthemum vulgare, Galium verum, Iberis amara, Leucanthemum vulgare, Linaria vulgaris, Lotus corniculatus, Origanum vulgare, Salvia verbenaca, Scabiosa columbiana, Silene vulgaris

Block paved pedestrian area 65mm pavers on 50mm sand bed

Existing tarmac reinstated as reqd.

Site boundary and 1.8m close boarded fence

PCC kerbs to perimeter of hard surfacing

Black "zero upward lighting component" led lamp posts 2m high



Electric vehicle charging point

A	27.01.25	Parking layout etc.
REV	DATE	DETAILS






Proposals

SITE ADDRESS
19 Groveland Road, Spencers Wood
Reading RG7 1DP

PROJECT
Replacement building for Gospel Hall



SCALE 1:100 @ A1, 1:200 @ A3	DATE 21.10.2024
DWG NO. 853-02	REVISION
	DRAWN P.R.
	CHECKED
	ORIGINAL SIZE A1

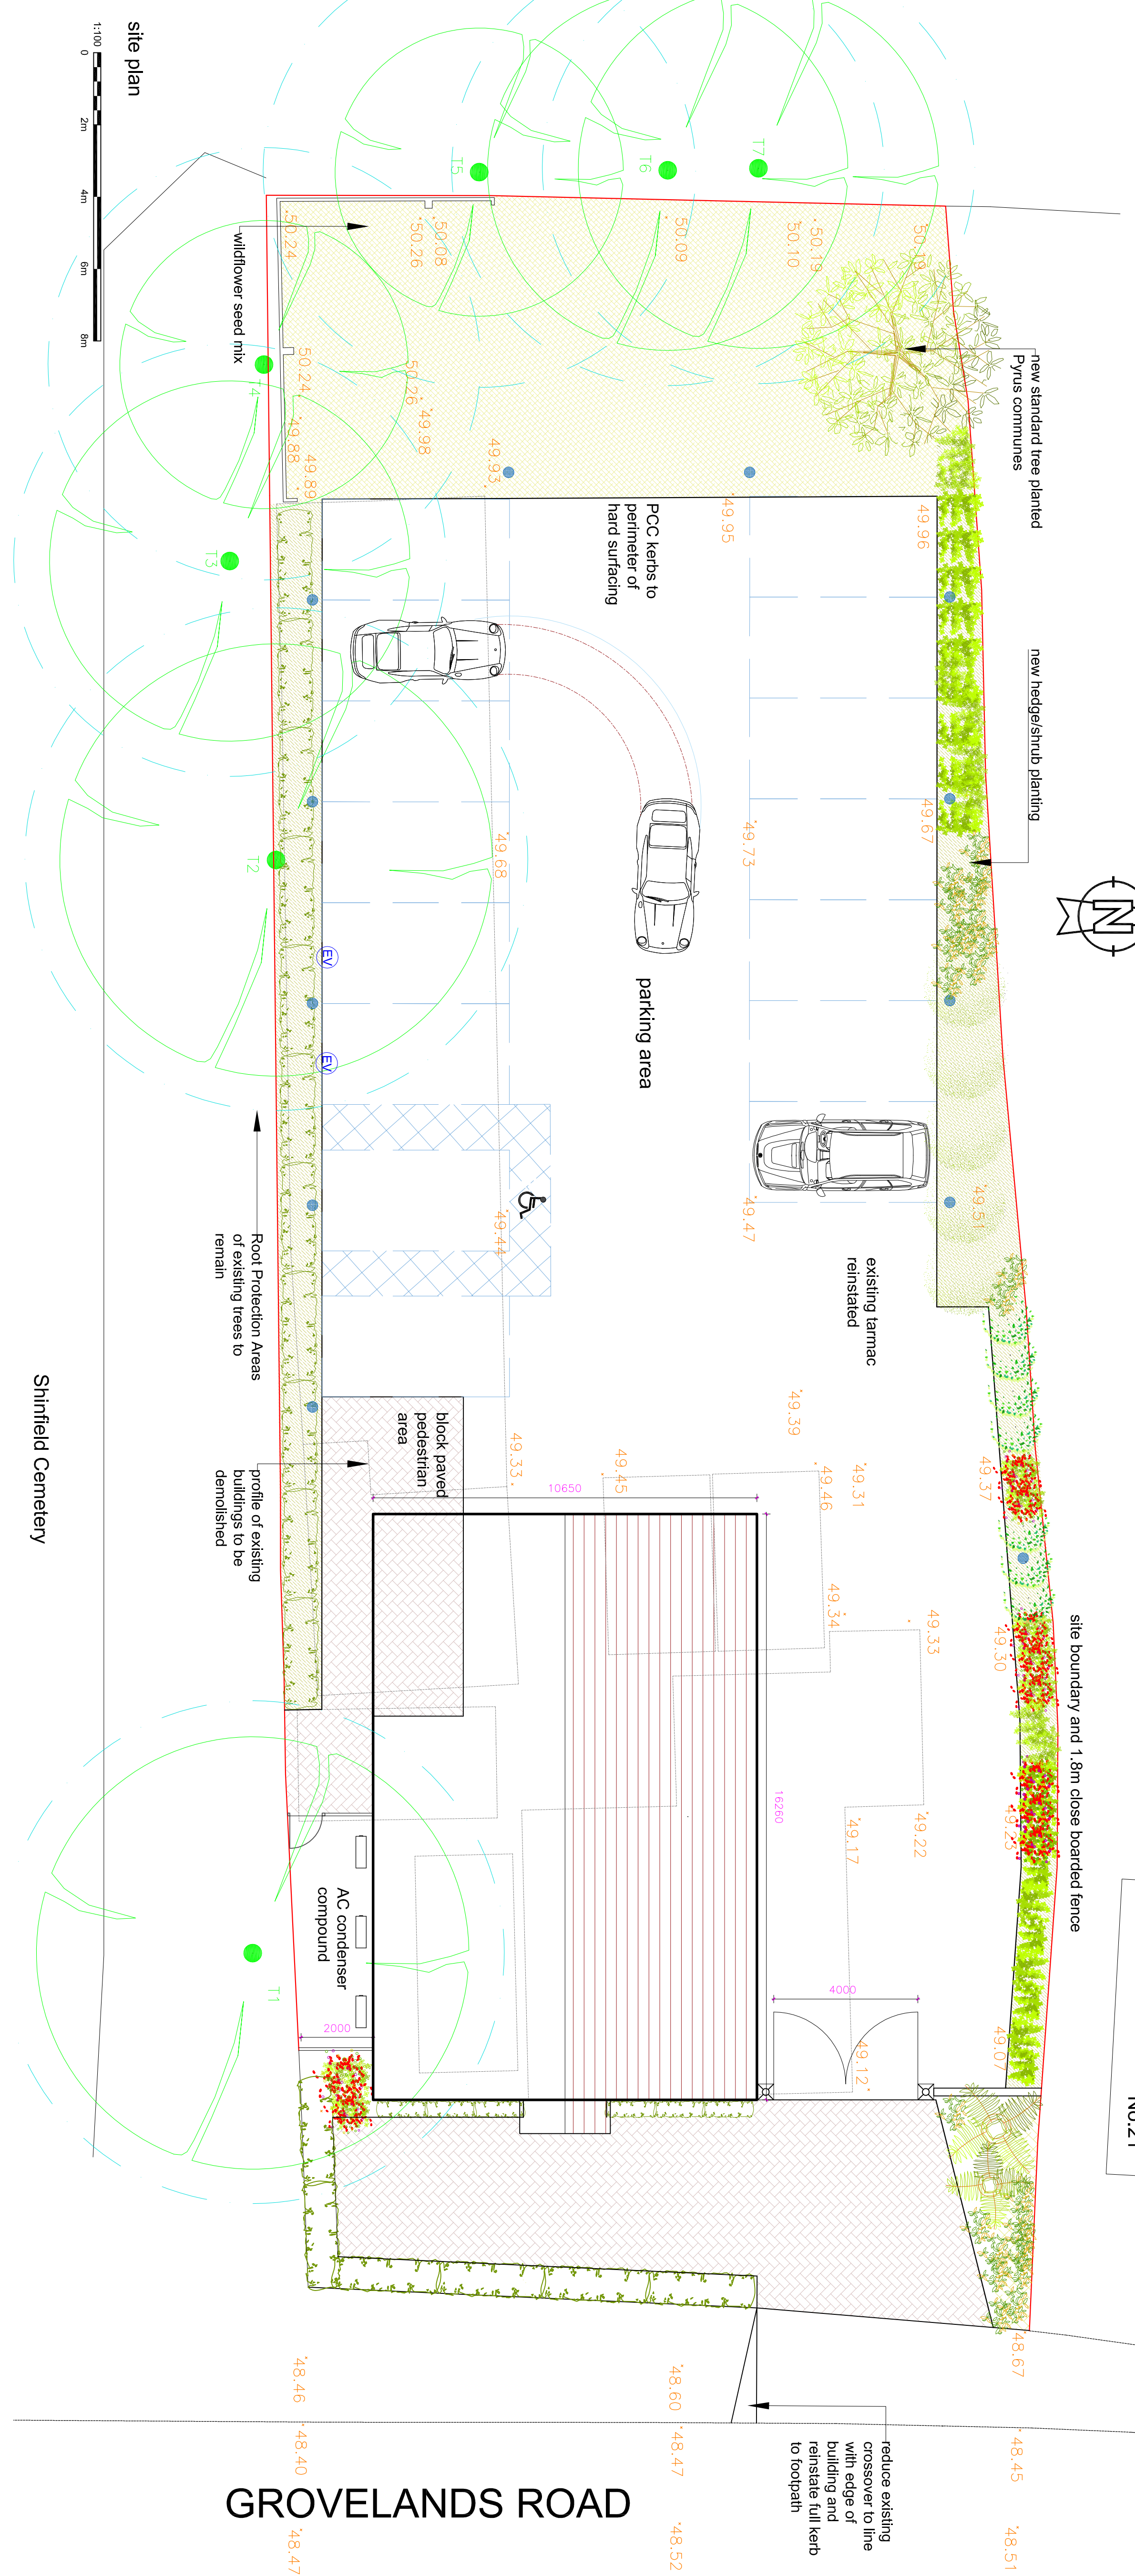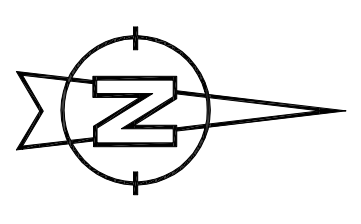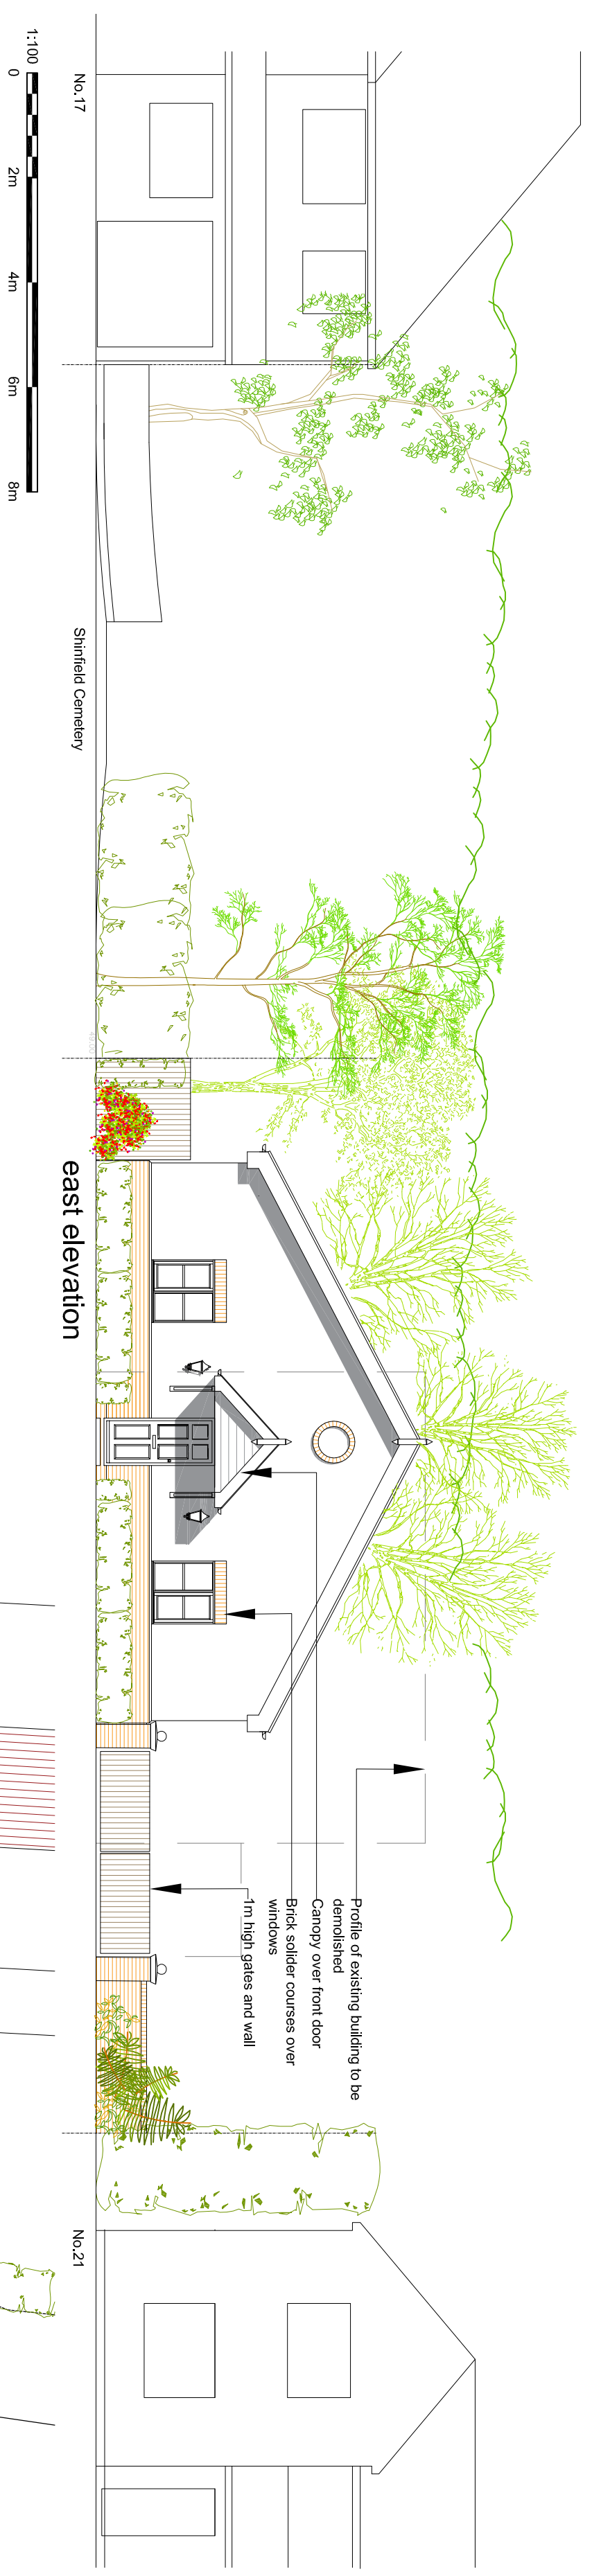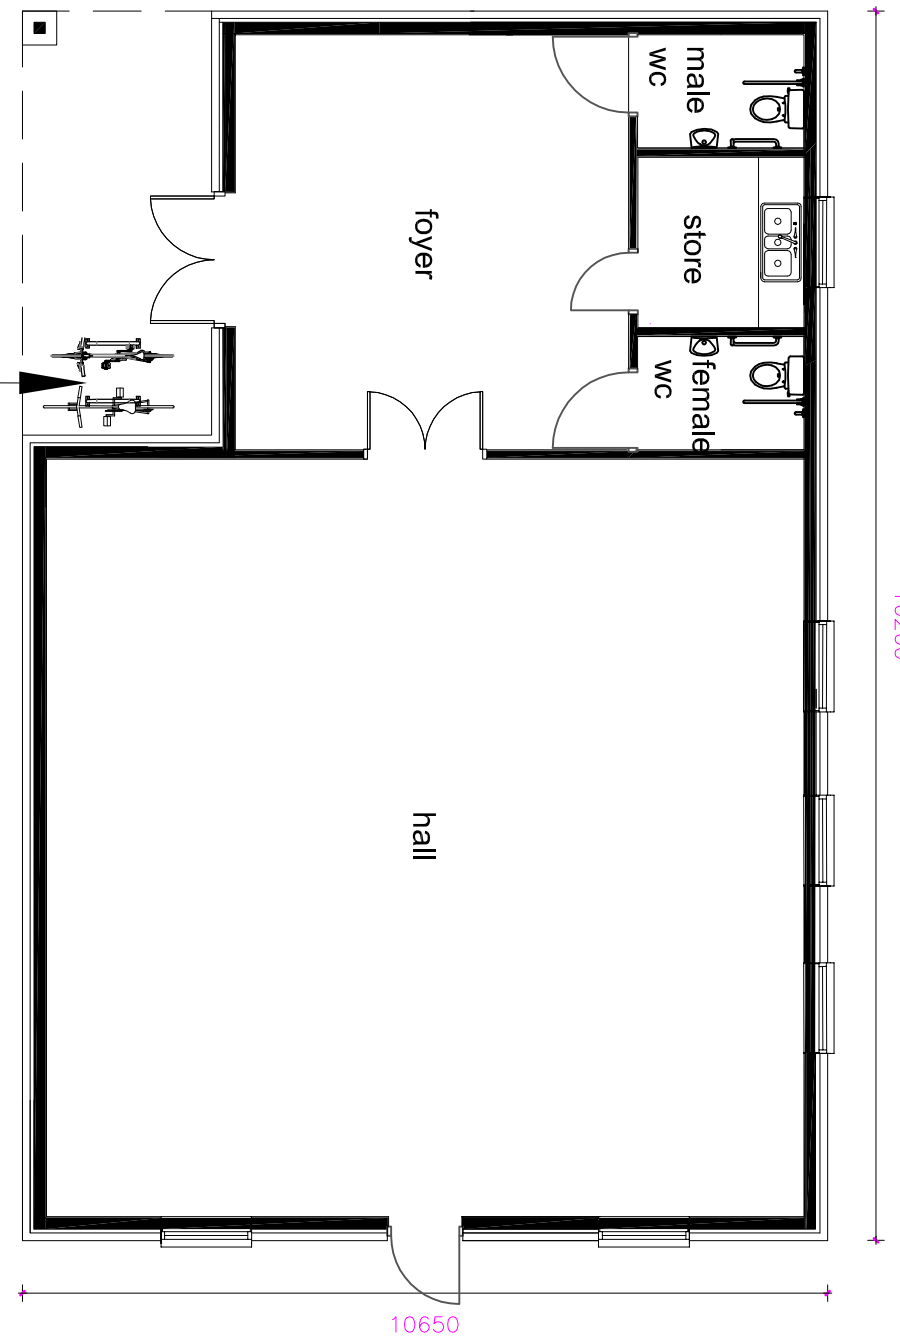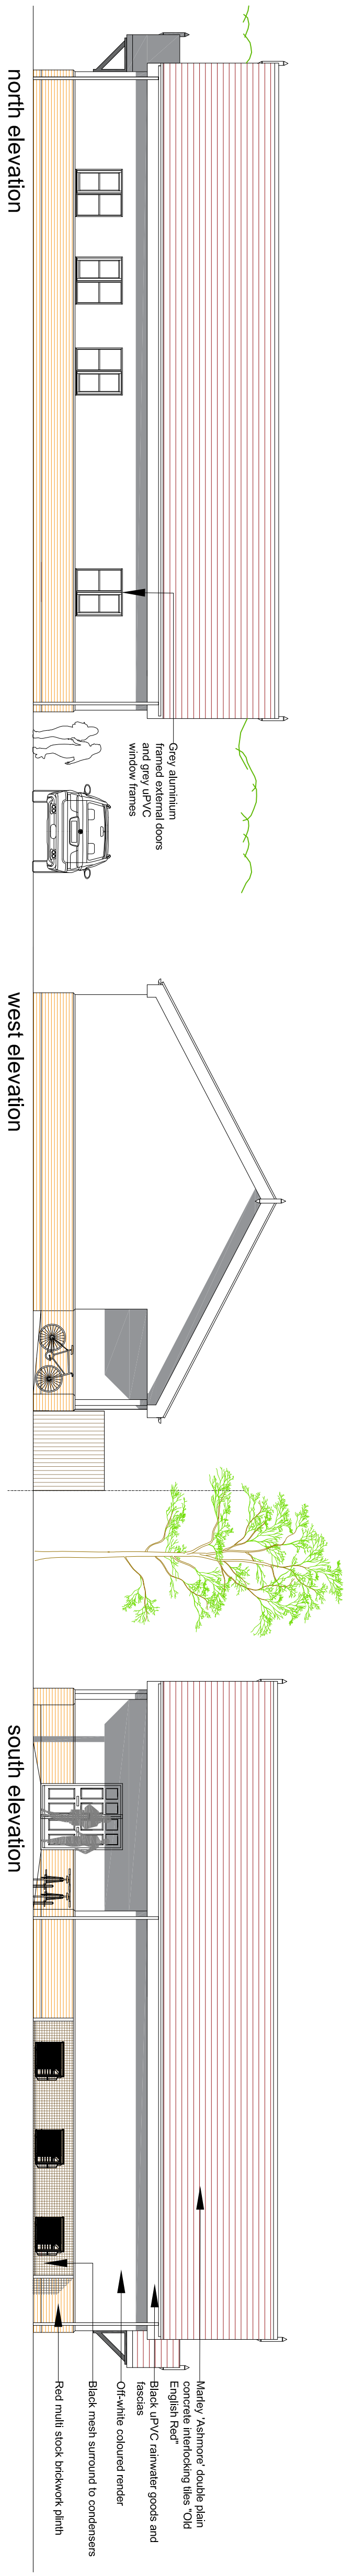

GROVELANDS ROAD