
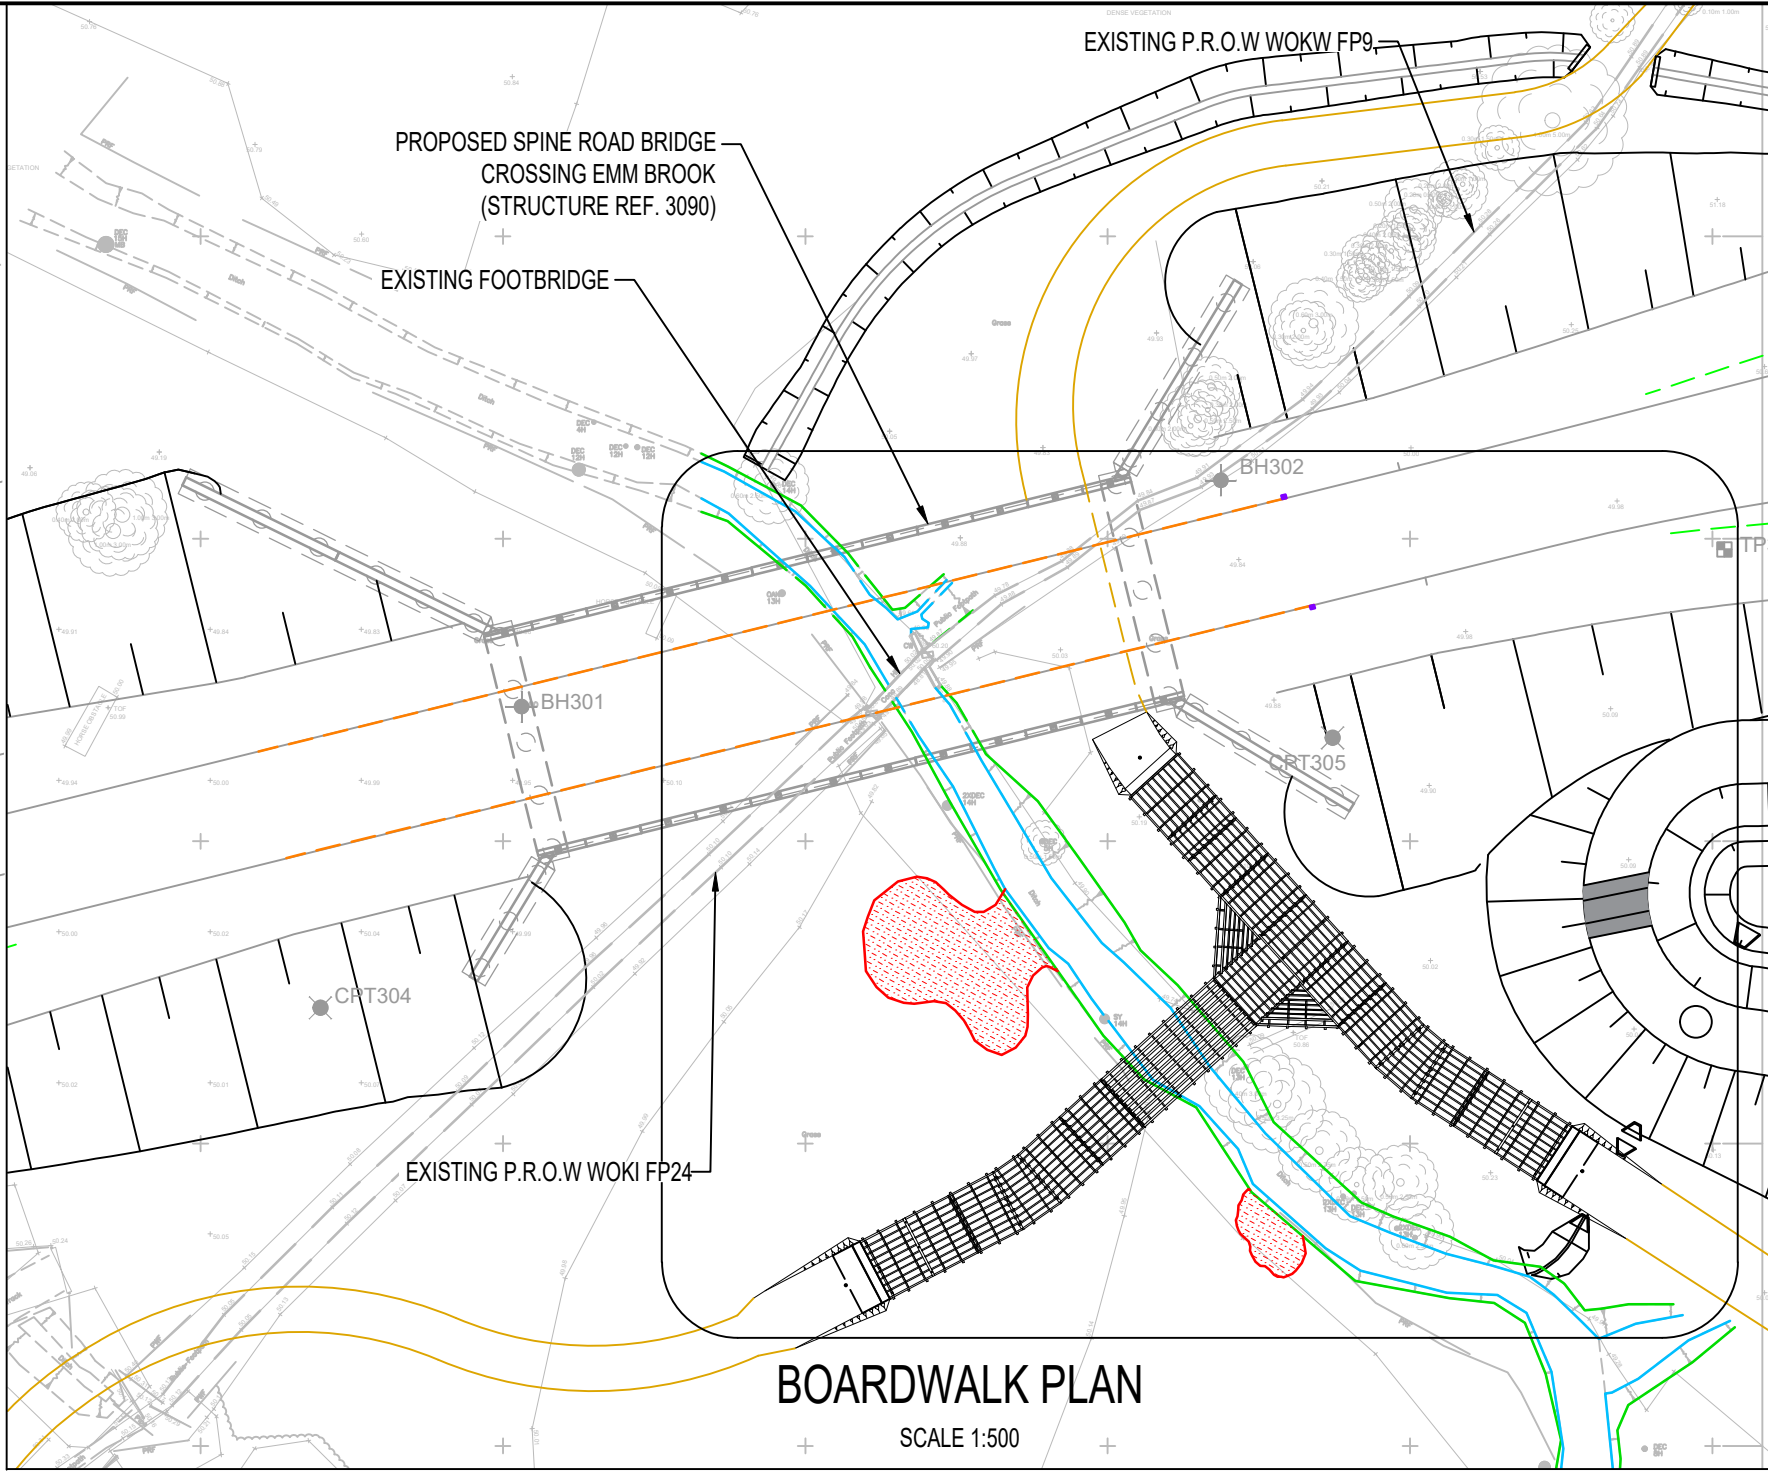


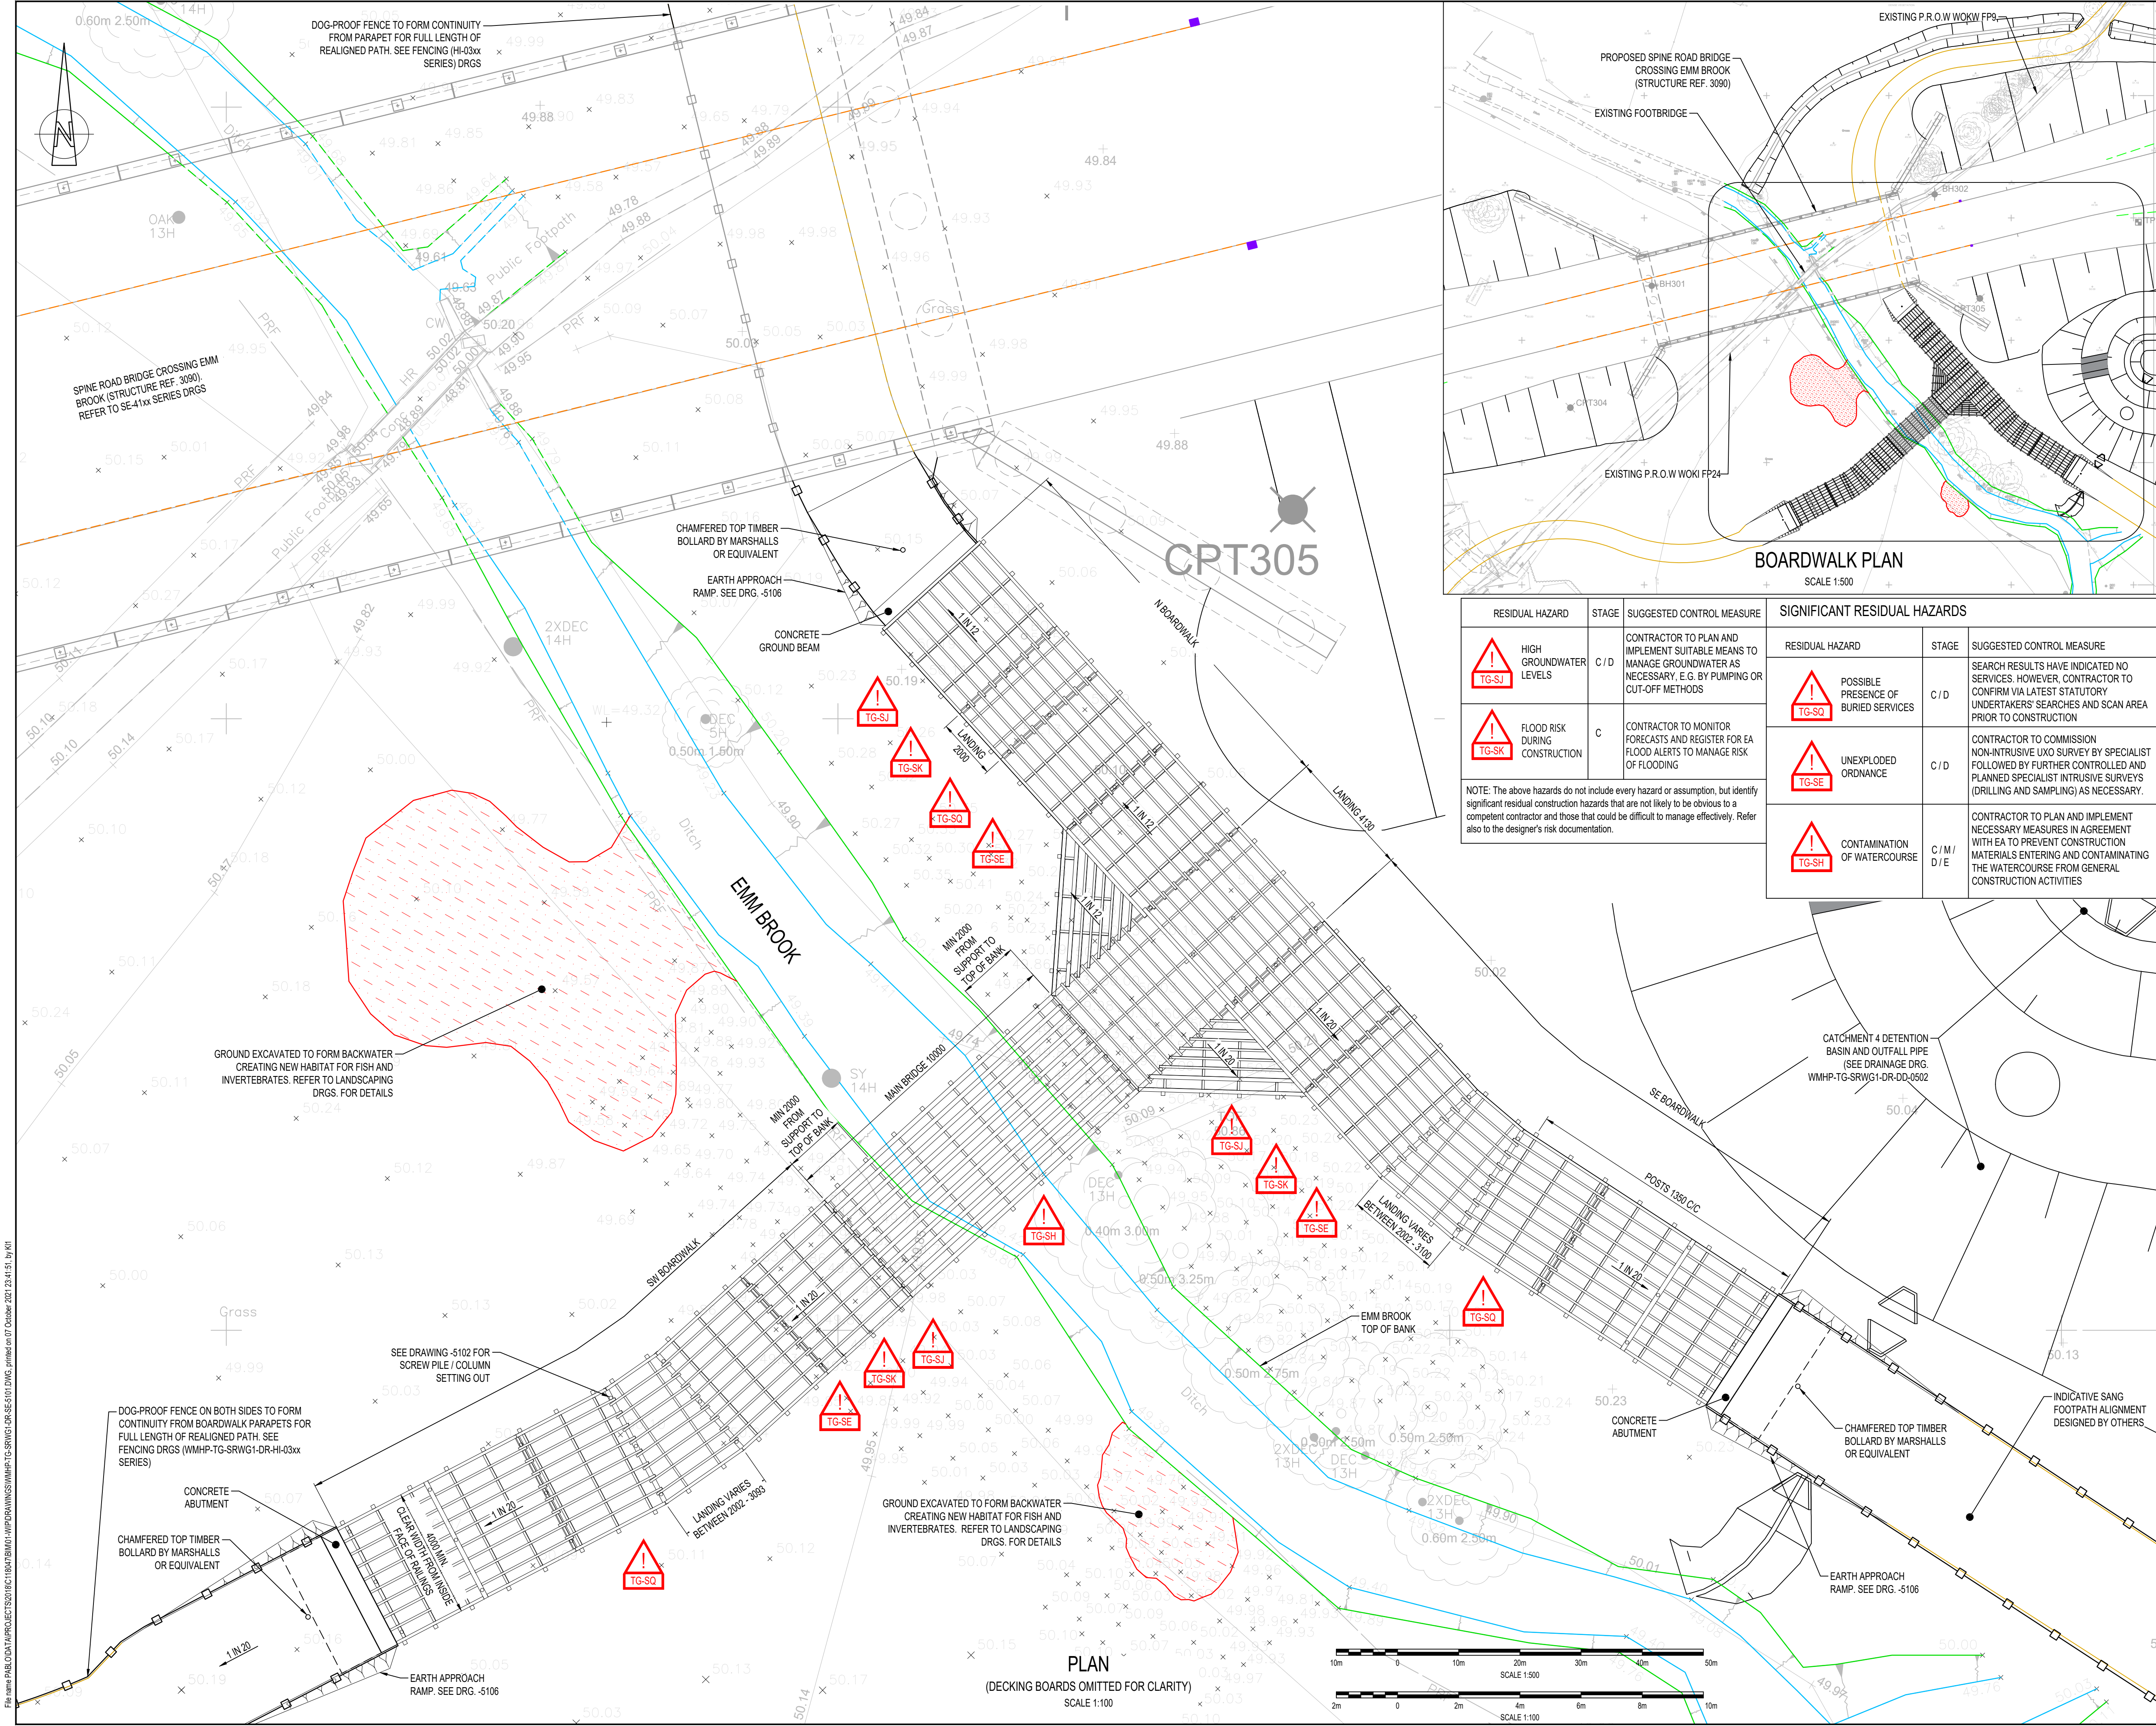

RESIDUAL HAZARD	STAGE	SUGGESTED CONTROL MEASURE	RESIDUAL HAZARD	STAGE	SUGGESTED CONTROL MEASURE
HIGH GROUNDWATER LEVELS	C/D	CONTRACTOR TO PLAN AND IMPLEMENT SUITABLE MEANS TO MANAGE GROUNDWATER AS NECESSARY, E.G. BY PUMPING OR OUT-OFF METHODS	POSSIBLE PRESENCE OF BURIED SERVICES	C/D	SEARCH RESULTS HAVE INDICATED NO SERVICES. HOWEVER, CONTRACTOR TO CONFIRM VIA LATEST STATUTORY UNDERTAKERS' SEARCHES AND SCAN AREA PRIOR TO CONSTRUCTION
FLOOD RISK DURING CONSTRUCTION	C	CONTRACTOR TO MONITOR FORECASTS AND REGISTER FOR EA FLOOD ALERTS TO MANAGE RISK OF FLOODING	UNEXPLODED ORDNANCE	C/D	CONTRACTOR TO COMMISSION NON-INTRUSIVE UXO SURVEY BY SPECIALIST FOLLOWED BY FURTHER CONTROLLED AND PLANNED SPECIALIST INTRUSIVE SURVEYS (DRILLING AND SAMPLING) AS NECESSARY.
NOTE: The above hazards do not include every hazard or assumption, but identify significant residual construction hazards that are not likely to be obvious to a competent contractor and those that could be difficult to manage effectively. Refer also to the designer's risk documentation.			CONTAMINATION OF WATERCOURSE	C/M/D/E	CONTRACTOR TO PLAN AND IMPLEMENT NECESSARY MEASURES IN AGREEMENT WITH EA TO PREVENT CONSTRUCTION MATERIALS ENTERING AND CONTAMINATING THE WATERCOURSE FROM GENERAL CONSTRUCTION ACTIVITIES

DO NOT SCALE

NOTES:

- ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.
- ALL LEVELS ARE IN METRES AOD UNLESS NOTED OTHERWISE.
- THIS DRAWING SHALL BE READ IN CONJUNCTION WITH DRAWINGS WMHP-TG-SRWG1-DR-SE-5102 TO -5107.
- GREY BACKGROUND INCLUDING SPOT LEVELS ARE BASED ON SURVEY FILES "XTOPOSURVEY" (DRG. No. MSL15152-T3D-RevA-23) COMMISSIONED BY WSP AND UNDERTAKEN BY MURPHY SURVEYS, DATED JUNE 2016, AND "SD19630-01" COMMISSIONED BY BALFOUR BEATTY AND UNDERTAKEN BY TECHNICS, DATED NOVEMBER 2019. THE CONTRACTOR SHALL VERIFY ITS ACCURACY ON SITE BEFORE CONSTRUCTION.
- NO UTILITIES SHOWN ON DRAWING AS STATUTORY UNDERTAKER SEARCHES HAVE INDICATED THAT NO SERVICES ARE LOCATED WITHIN THE STRUCTURE FOOTPRINT. HOWEVER, CONTRACTOR SHALL VERIFY THROUGH FURTHER SURVEY AND SCANS. REFER TO HAZARD TG-SQ.

KEYPLAN

P03	07/10/2021	BPH	STRUCTURE NAME UPDATED IN DRG TITLE	CMF	KL
P02	13/08/2021	BPH	BACKGROUND DRAINAGE DESIGN UPDATED	KL	CMF
P01	29/03/2021	TCH	FIRST ISSUE	KL	CMF
REV	DATE	BY	DESCRIPTION	CHK	APP

DRAWING STATUS: **SUITABLE FOR REVIEW & COMMENT** **S3**

DESIGNER: **Tony Gee**
Consulting Civil, Structural and Geotechnical Engineers

CONTRACTOR: **Balfour Beatty**

CLIENT: **WOKINGHAM BOROUGH COUNCIL**
Shute End, Wokingham, Berkshire RG40 1BN
Tel: (0118) 974 6000 Web: www.wokingham.gov.uk

PROJECT: **WOKINGHAM MAJOR HIGHWAYS PROGRAMME**
SPINE ROAD AND WESTERN GATEWAY PHASE 1

TITLE: **NEW GYPSY LANE FOOTBRIDGE / BOARDWALK**
STRUCTURE REFERENCE: 3094
GENERAL ARRANGEMENT

SCALE @ A1:	CHECKED:	APPROVED:
AS SHOWN	KL	CMF
PROJECT NO:	DESIGNED:	DRAWN:
C118047	EPM	TCH
DRAWING No:	DATE:	REV:
WMHP-TG-SRWG1-DR-SE-5101	February 21	P03

File name: P:\BODATA\PROJECTS\2018\0718047\BMO1\WIP\DRAWINGS\WMHP-TG-SRWG1-DR-SE-5101.DWG, printed on 07 October 2021 23:41:51 by K1