

SIGNIFICANT RESIDUAL HAZARDS


RESIDUAL HAZARD	STAGE	SUGGESTED CONTROL MEASURE
WORKING IN CLOSE PROXIMITY TO WATERCOURSES. EXPOSURE TO HAZARDOUS SUBSTANCES 	C,D	Contractor to liaise with the lead local flood authority to gain flood alerts. Ensure workforce is suitably trained and competent and are wearing the appropriate level of PPE for the intended task to reduce the risk of workers contracting leptospirosis or well's disease.
WORKING IN ECOLOGICALLY SENSITIVE AREA 	C,D	Construction activities will be directly adjacent to existing watercourse. Contractor's method statement to consider the risk of working adjacent to existing watercourse to ensure waste is not inadvertently directed into watercourse. Contractor to liaise with the lead local flood authority to gain flood alerts. Ensure workforce is suitably trained and competent and are wearing the appropriate level of PPE for the intended task to reduce the risk of workers contracting leptospirosis or well's disease.

NOTE: The above hazards do not include every hazard or assumption, but identify significant residual construction hazards that are not likely to be obvious to a competent contractor and those that could be difficult to manage effectively. Refer also to the designer's risk documentation.

Prior to undertaking any planting works beneath or adjacent to overhead or underground power lines, the contractor must ensure they are satisfied with all guidance relating to tree planting, specifically regarding tree height clearance requirements. The following guidance should be considered:

- National Grid Guidance: Design Guidelines for Development Near High Voltage Overhead Lines; and
- Scottish & Southern Electricity Networks: Guidance for Third Parties Working Near SEN Transmission Asset.

The works contractors must ensure proper safety measures are in place and coordinated with the relevant authorities to mitigate risks during construction.


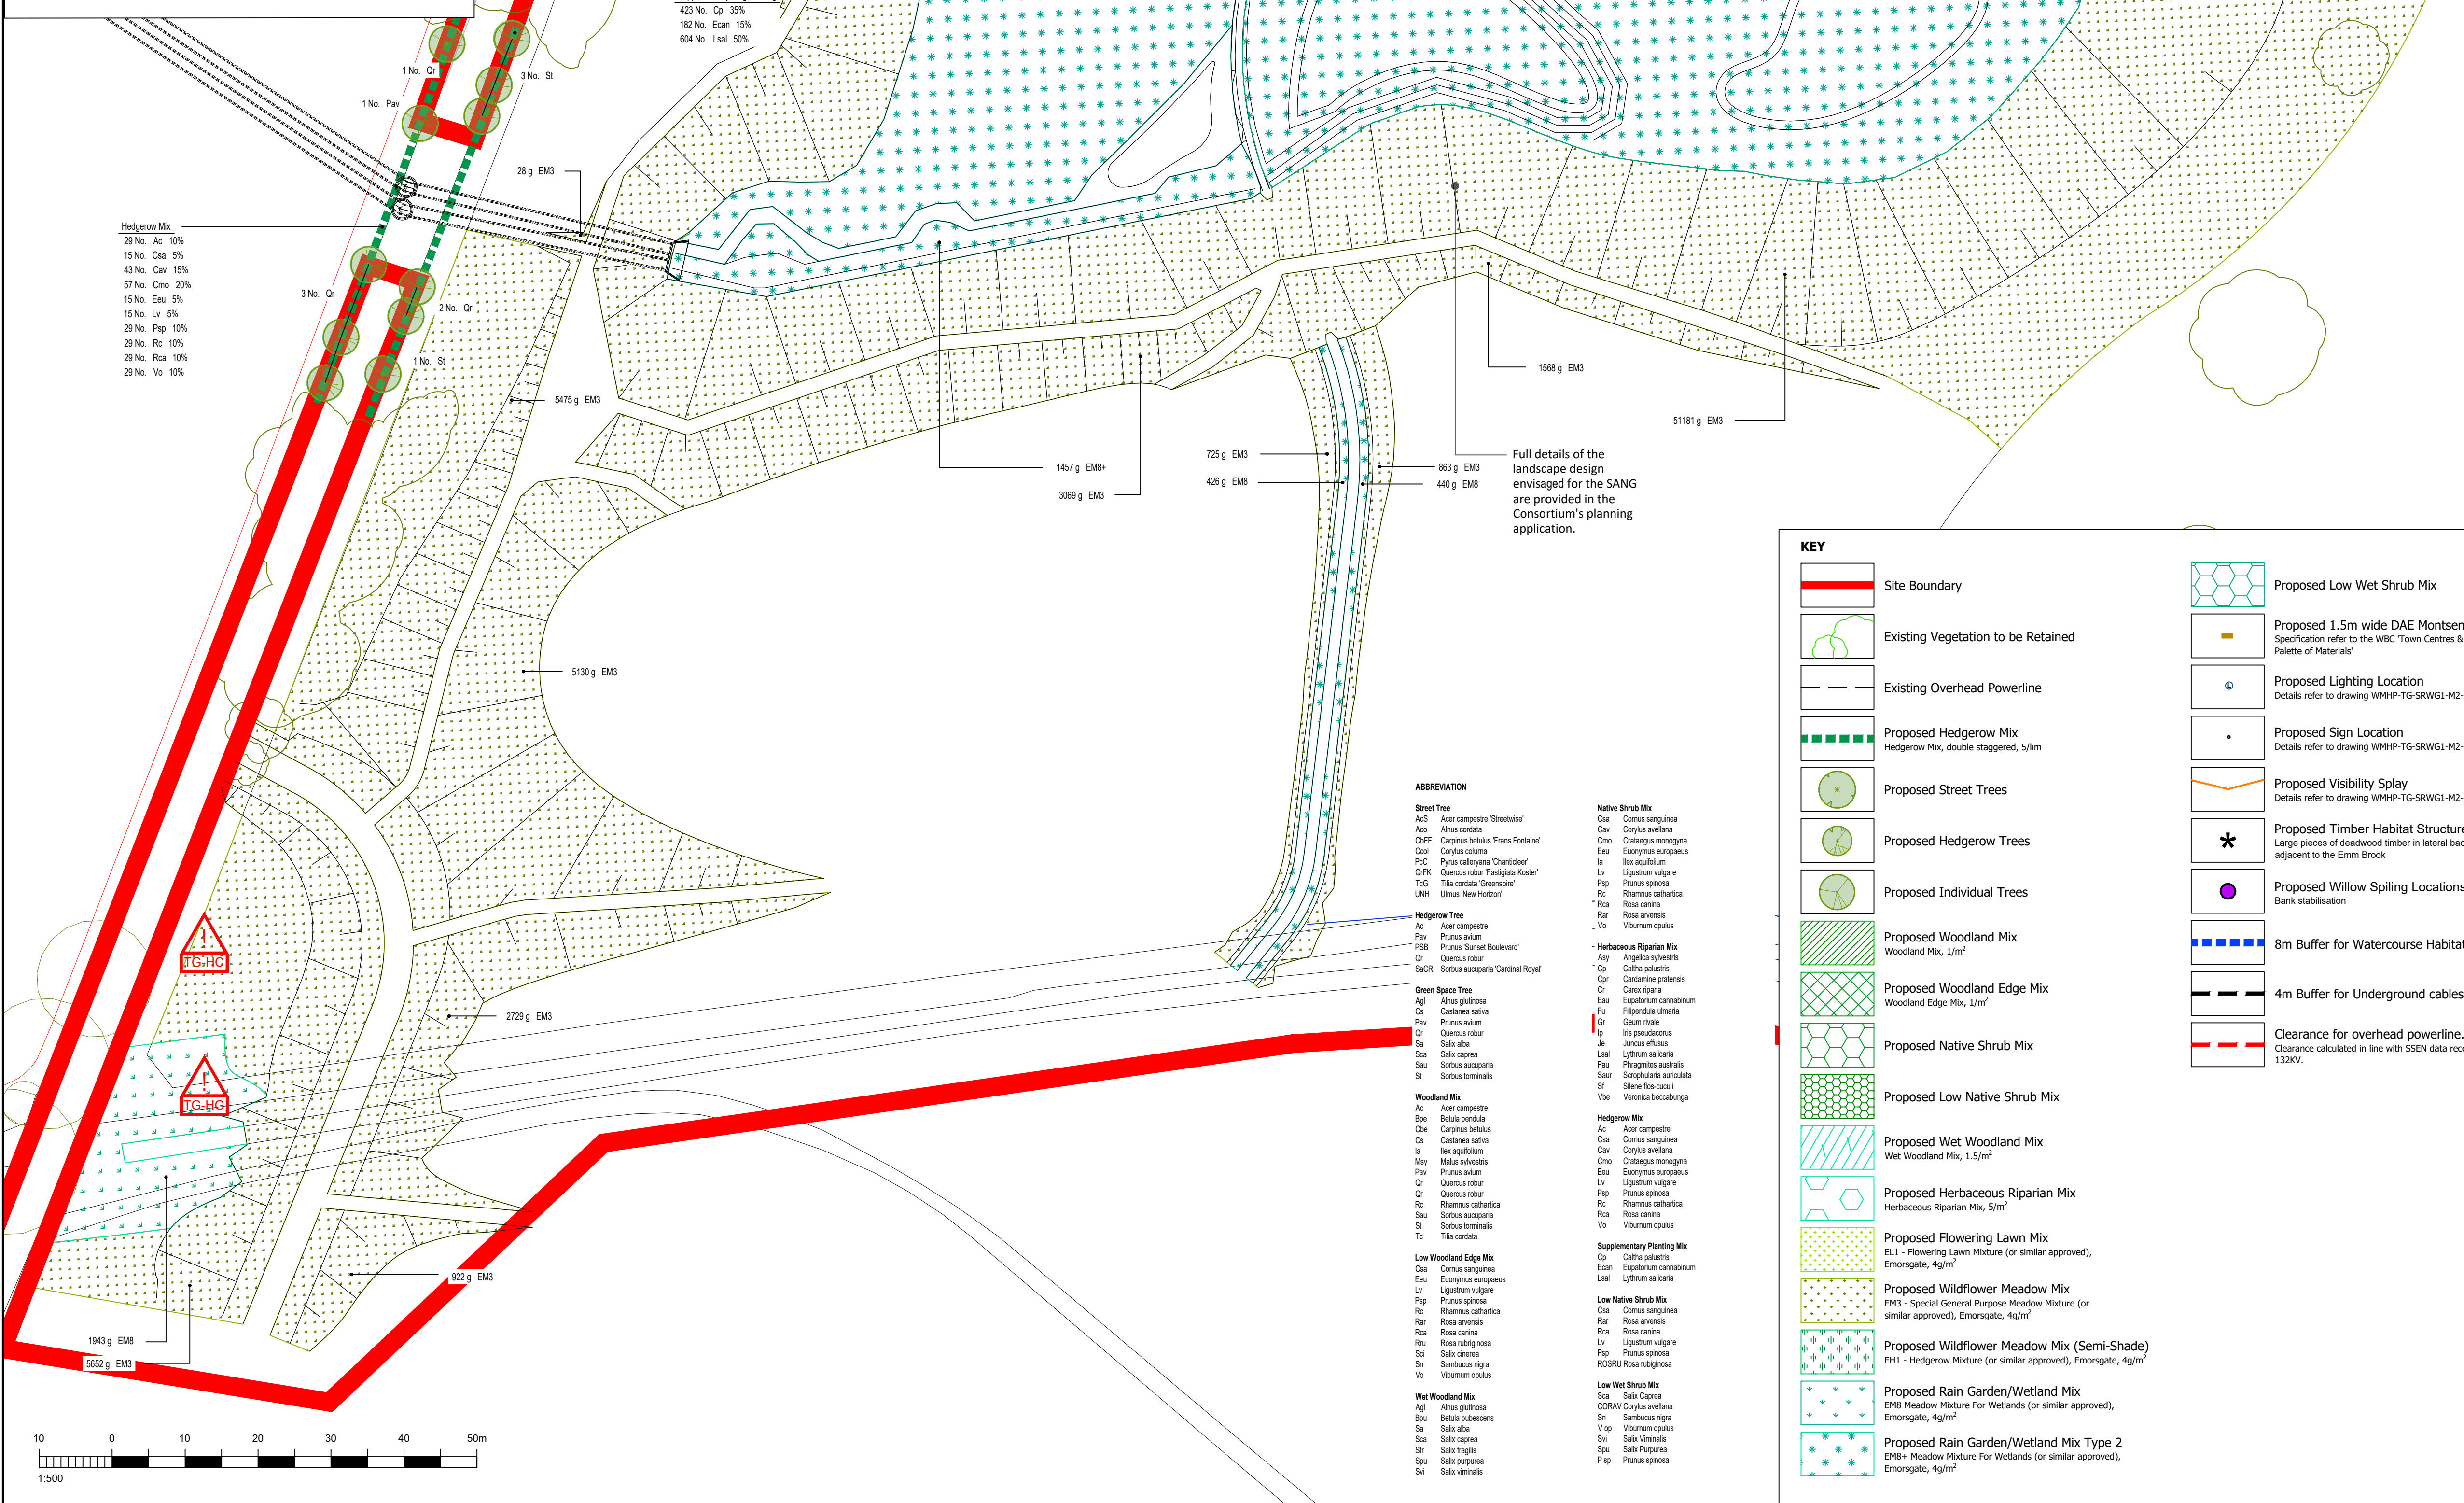


File name: Y:\1. PROJECTS\977 SPINE ROAD AND WESTERN GATEWAY PHASE 1\04 DRAWINGS\01 BIM\01 RBA ST 0-301 WIP\03 CAD DWG\MODEL FILES\4977-LAN-XX-X2-L-0002.DWG, printed on 07 February 2025, 12:10:45, by Lukas Cigas

DO NOT SCALE

- TREE PIT CONSTRUCTION DETAILS REFER TO DRAWINGS WMHP-TG-SRWG1-DR-LS-3010 - 3011
- ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.
- ALL LEVELS ARE IN METRES AOD UNLESS NOTED OTHERWISE.
- REFER TO THE 500 SERIES FOR LEVEL INFORMATION
- FENCE DETAILS REFER TO DRAWINGS WMHP-TG-SRWG1-DR-LS-3001 - 3009
- ROAD RESTRAINT SYSTEMS REFER TO DRAWINGS WMHP-TG-SRWG1-DR-HI-0401 - 0409 AND 0421
- ALL NEW AND EXISTING SHRUB PLANTING, TREES AND VEGETATION TO BE PRUNED AND MAINTAINED IN PERPETUITY TO ALLOW FULL VISIBILITY OF ROAD SIGNAGE

SITE LOCATION PLAN SCALE: 1:25000

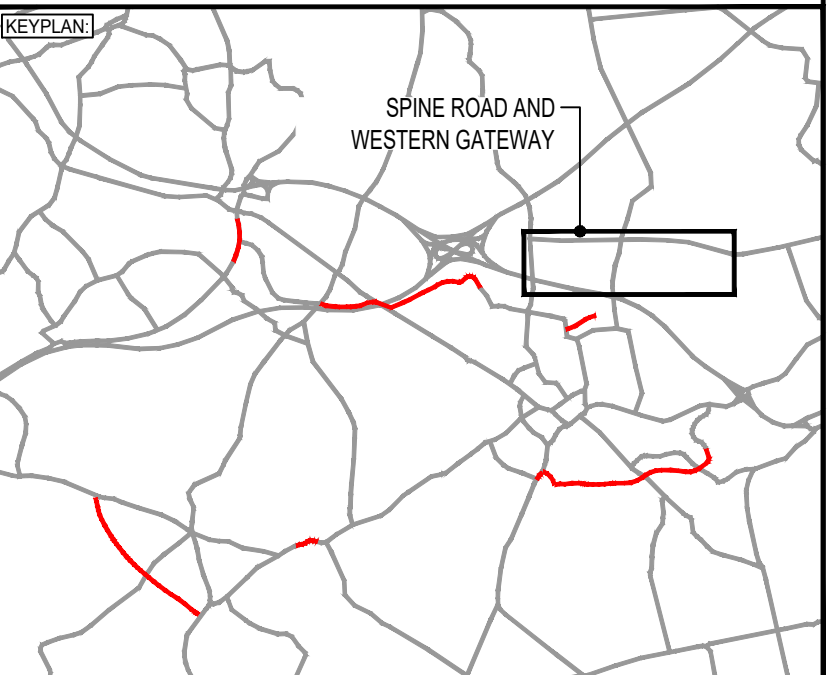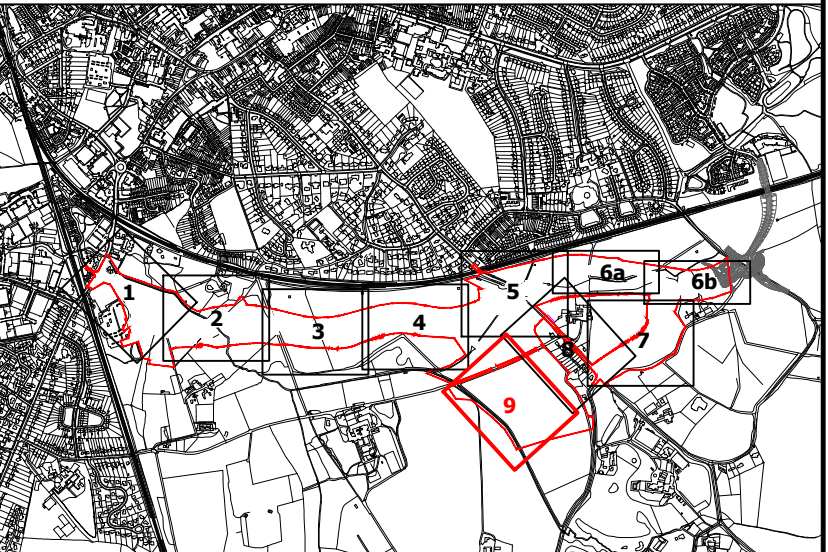

REV	DATE	BY	DESCRIPTION	CHK	APP
P08	07/02/2025	LC	REVISED TO INCL. ADD. HEDGE & TREE PLANTING	JC	JC
P08	04/02/2025	NJ	REVISED TO REMOVE TRANSLATED TURF	JC	JC
P07	20/11/2025	NJ	REVISED TO REFLECT ECOLOGY COMMENTS	JC	JC

DRAWING STATUS: **FOR REVIEW & COMMENT** **S3**

DESIGNER: **Tony Gee**
Consulting Civil, Structural and Geotechnical Engineers
www.tonygee.com

Tony Gee and Partners LLP
Hardy House
140 High Street
Esher, Surrey
KT10 9JQ
Tel: 01372 461600

CLIENT: **WOKINGHAM BOROUGH COUNCIL**
Shute End, Wokingham, Berkshire RG40 1BN
Tel: (0118) 974 6000 Web: www.wokingham.gov.uk

PROJECT: **SPINE ROAD AND WESTERN GATEWAY PHASE 1**

TITLE: **HIGHWAYS
SOFT LANDSCAPING PLANTING PLAN**

SCALE @ A1: 1:500 CHECKED: JC APPROVED: JC

PROJECT NO: C118047 DESIGNED: WM DRAWN: WM DATE: February 25

DRAWING NO: WMHP-TG-SRWG1-DR-LS-3009 REV: P09