

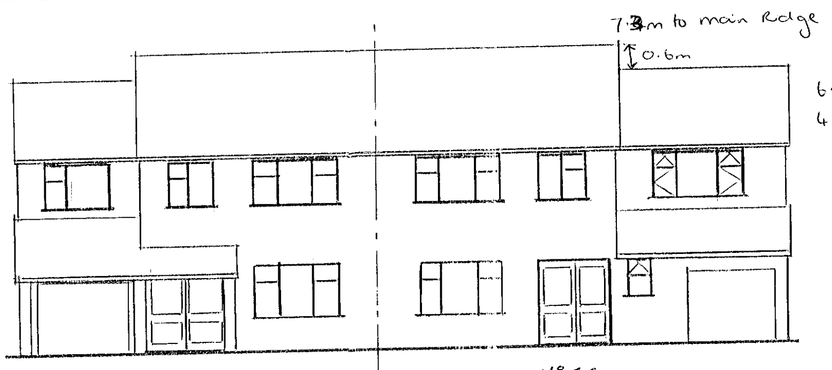



FRONT ELEVATION Nº66

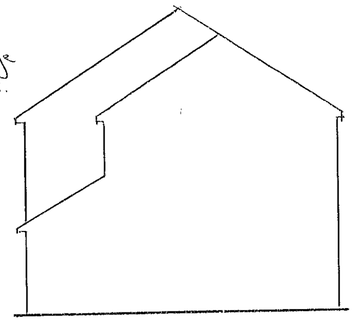


Nº66
SIDE ELEVATION

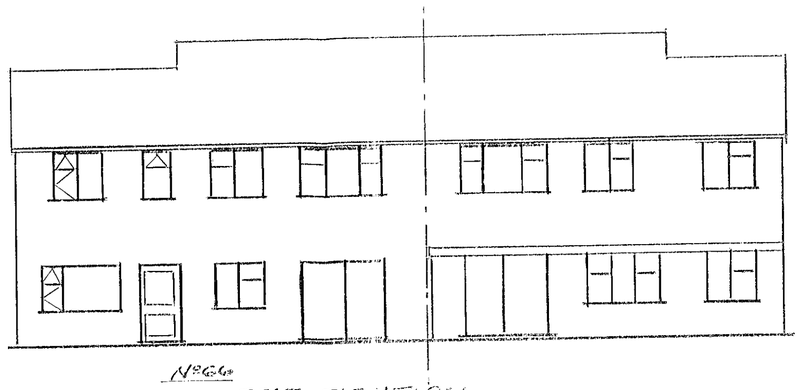

Nº66
REAR ELEVATION

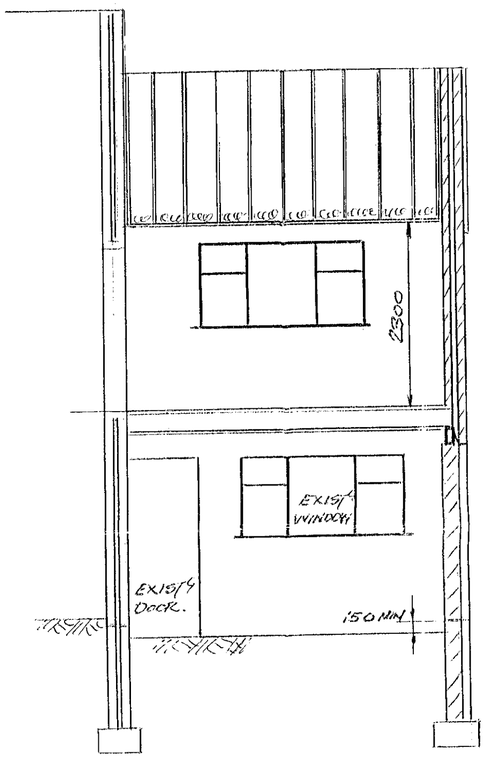

SECTIONAL ELEV.

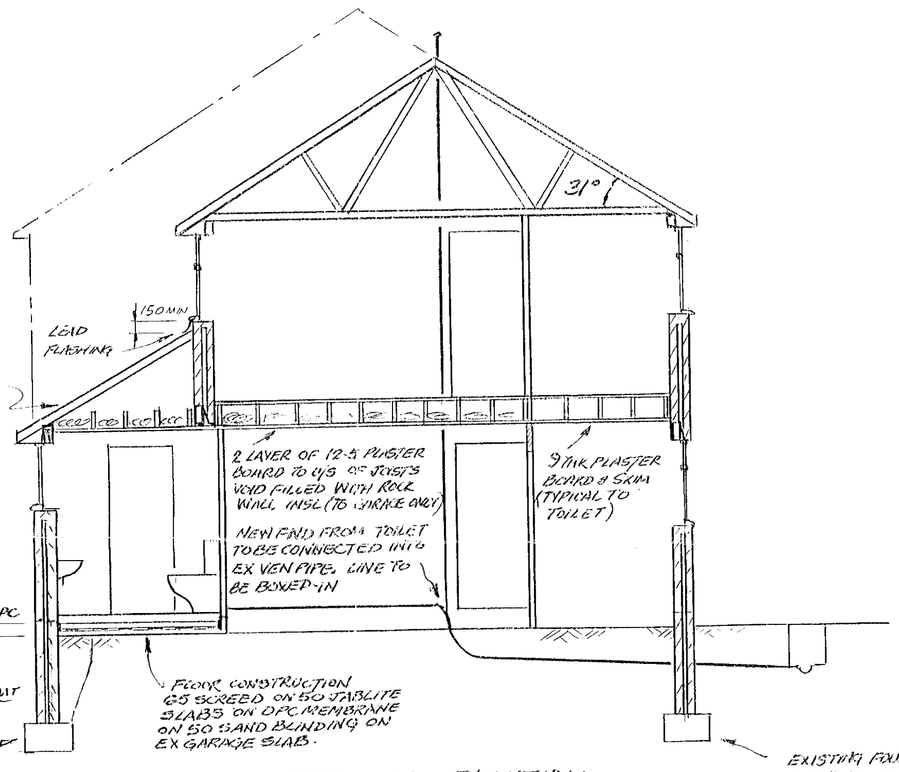

CROSS SECTIONAL ELEVATION

NOTES

1. ALL DOORS & WINDOWS TO HAVE VERTICAL & HORIZONTAL P.P.C WITH DAMCORE OR SIMILAR TO VERTICAL D.P.C.
2. GALV WALL TIES 5 PER SQ.M. EXTRA TO OPENINGS & CORNERS.
3. LINTELS TO HAVE 150 MIN BEARING
4. WINDOWS TO BE DOUBLE GLAZED WITH TRICKLE VENTS (8000 MM MIN). MIN OPENING 1/20 FLOOR AREA
5. ROOF TRUSSES TO BE FACTORY MADE CALCULATIONS TO BE SUBMITTED TO L.A. PRIOR TO ERECTION.
6. ROOF TILES TO MATCH EXISTING LAID ON 38x19 BATTENS ON UNTEARABLE FELT.
7. MATCHING BRICKWORK TO EXTERNAL WALLS. 100 THERMALITE BLOCKS INTERNALLY 50 CAVITY FILLED WITH ROCKWALL INSULATION
8. INTERNAL FINISH TO WALLS & CEILINGS PLASTER & SKIM
9. LATERAL BRACING STRAPS @ 2000 CRS.
10. ALL DIMENSIONS TO BE SITE CHECKED

GROUND FLOOR PLAN

1ST FLOOR PLAN

27.NOV.2000 2514

APPROVED

PROPOSED 1ST FLOOR EXTENSION FOR MR M. NEATE
66 COLDBECK DRIVE
WOODLEY. BERKS
4TH BEDROOM ENSUIT & DOWN STAIRS TOILET
SCALE 1:50 & 1:100
DRN - J.LNR 20/10/2000

20/12/01