


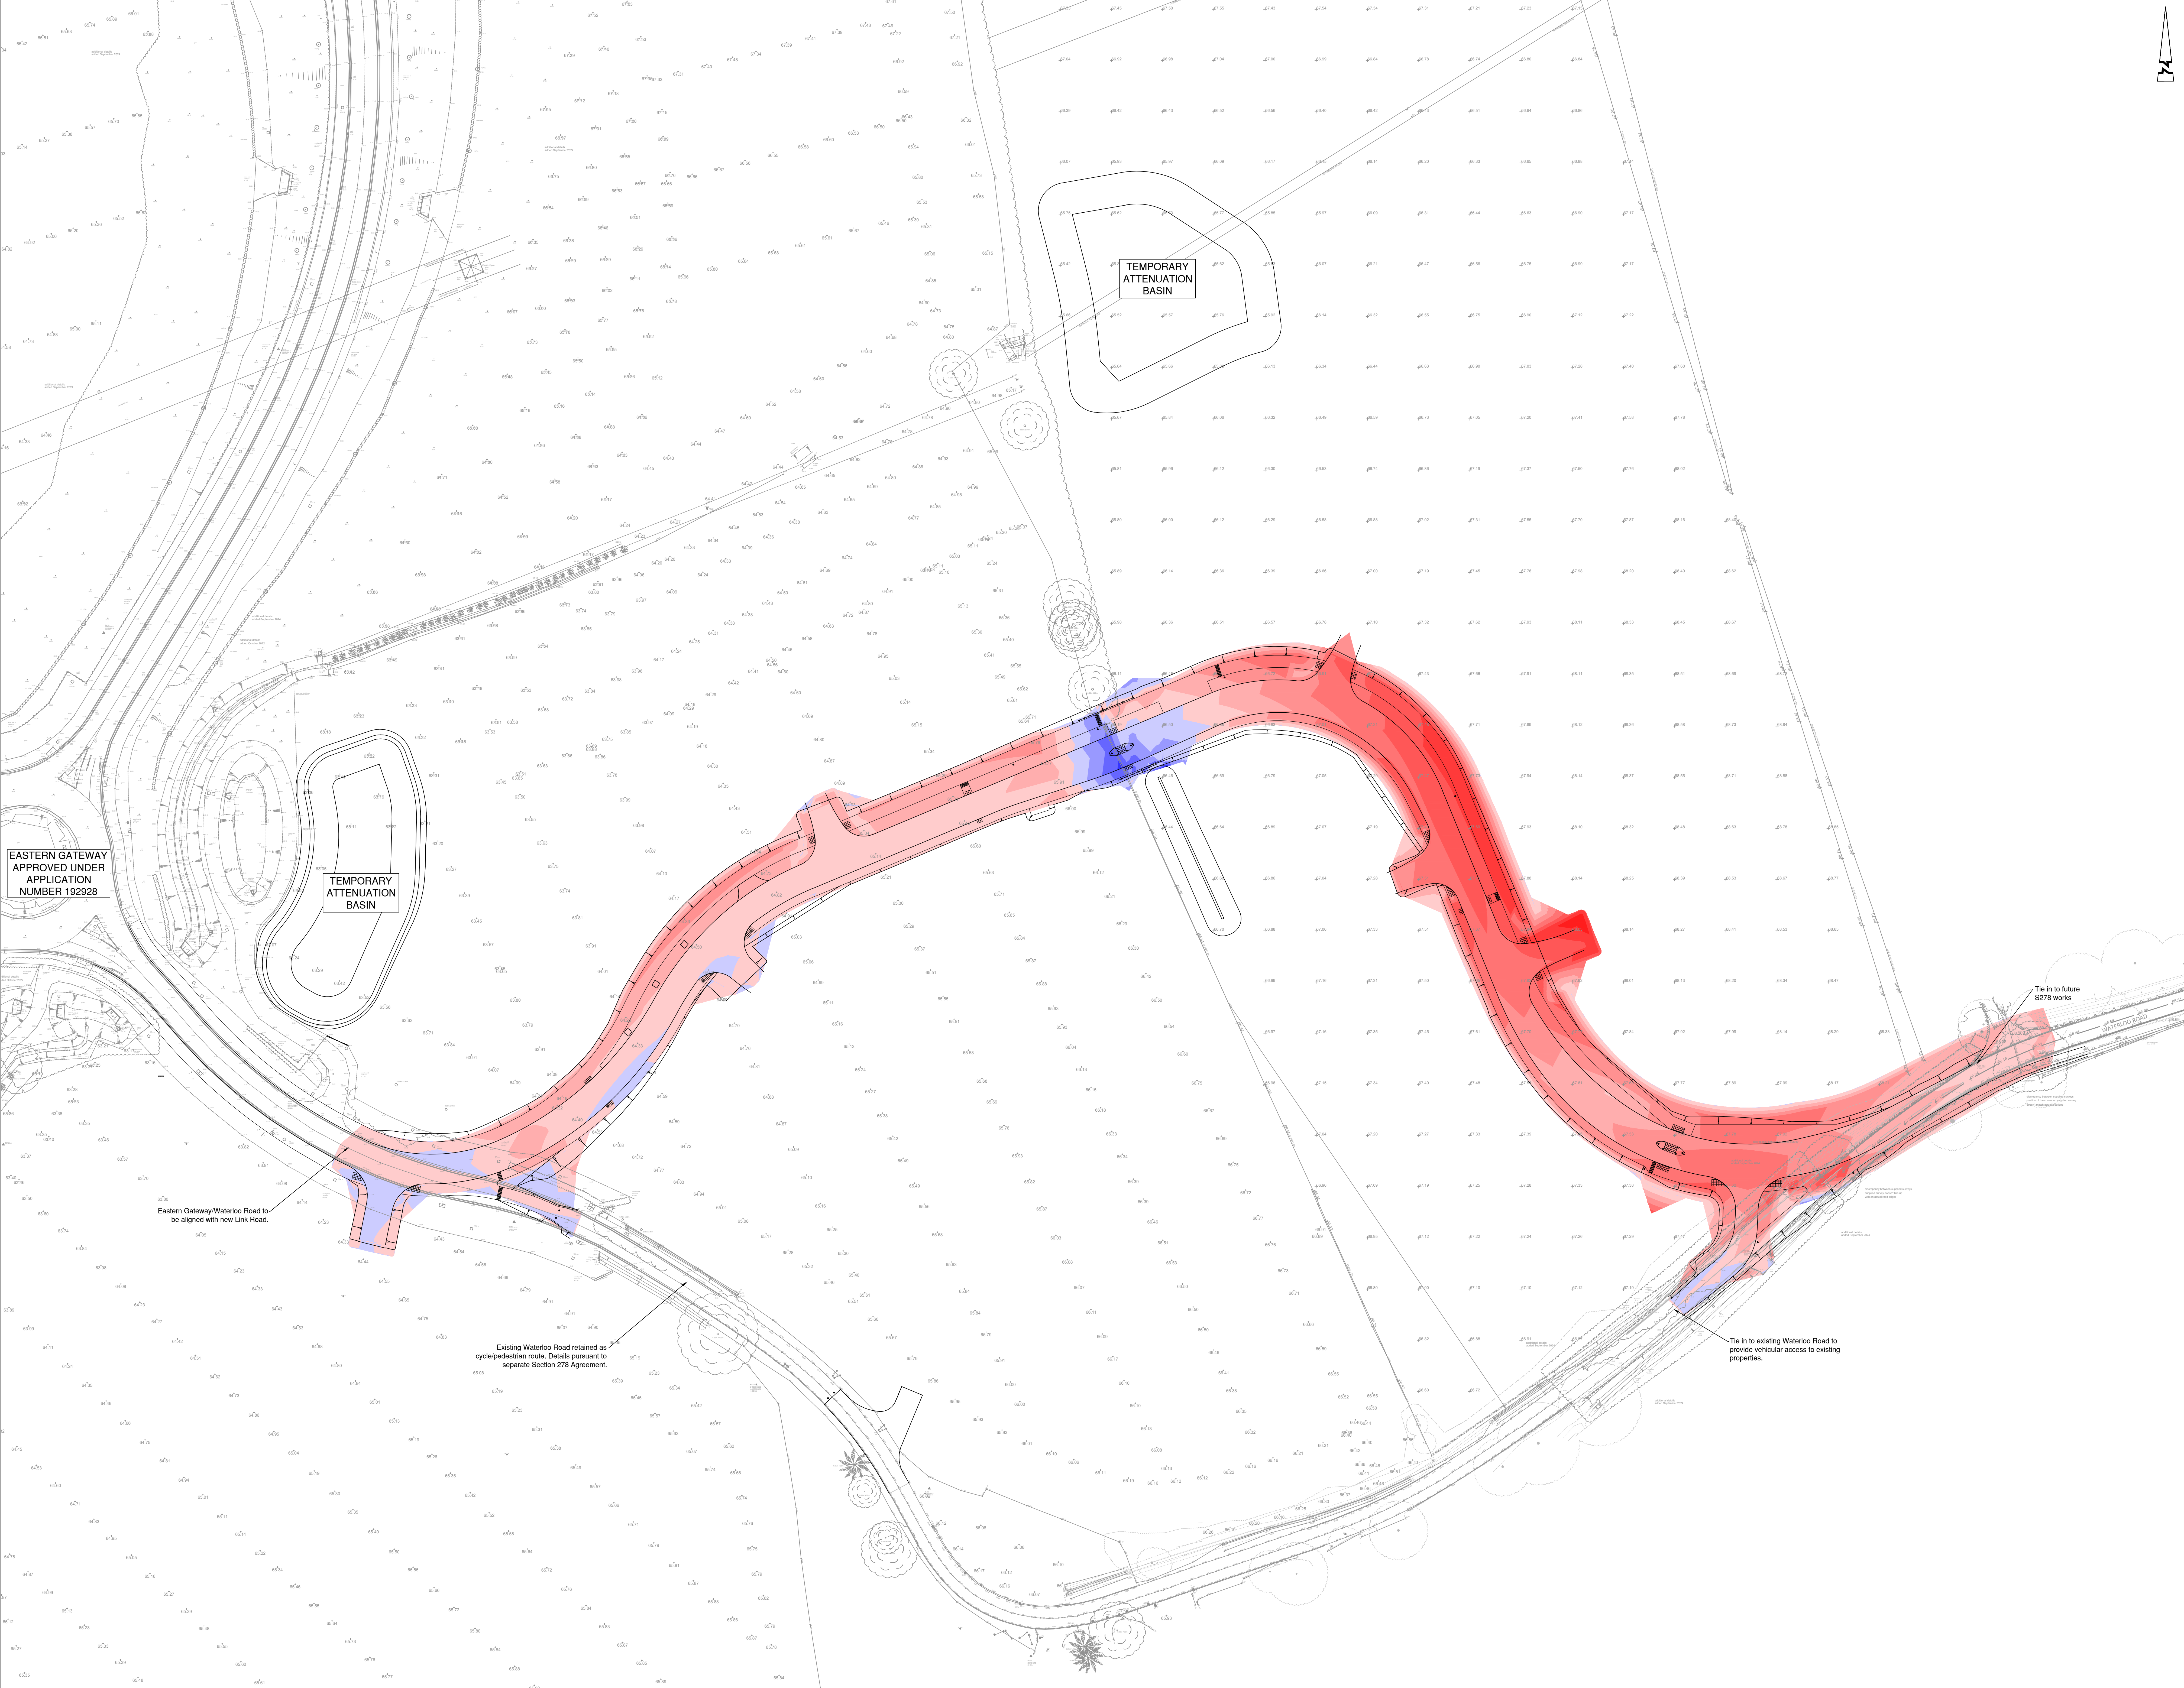

EASTERN GATEWAY
APPROVED UNDER
APPLICATION
NUMBER 192928

TEMPORARY
ATTENUATION
BASIN

TEMPORARY
ATTENUATION
BASIN

Eastern Gateway/Waterloo Road to
be aligned with new Link Road.

Existing Waterloo Road retained as
cycle/pedestrian route. Details pursuant to
separate Section 276 Agreement.

Tie in to existing Waterloo Road to
provide vehicular access to existing
properties.

Tie in to future
S276 works

© ABLE LETCHFORD PARTNERSHIP LTD.
This drawing should not be reproduced without
consent.

- ISOPACHYTE NOTES:
1. Do not scale.
 2. This drawing is to be read in conjunction with and checked against all other drawings, Engineering details, Specification and any structural, Geotechnical or other specialist document provided.
 3. The proposed works on this drawing could impact on existing services/statutory undertakers apparatus, therefore the Contractor should check the position of existing services on site prior to starting work.
 4. Any anomaly or contradiction between any of the above is to be reported to the Engineer.

ISOPACHYTE KEY:

Volume - Final Surface and 12400-1RevF.dwg		
Height Bands	Cut Volume	Fill Volume
Fill 1.25m - 2m	-	1.00m³
Fill 1.5m - 1.75m	-	24.10m³
Fill 1.75m - 1.5m	-	156.47m³
Fill 1m - 1.25m	-	440.51m³
Fill 0.75m - 1m	-	825.71m³
Fill 0.5m - 0.75m	-	1135.62m³
Fill 0.25m - 0.5m	-	2102.04m³
Fill 0m - 0.25m	-	111.88m³
Cut 0.25m - 0.5m	28.78m³	-
Cut 0.5m - 0.75m	5.28m³	-
Cut 0.75m - 1m	0.07m³	-
Cut 1m - 1.25m	-	-
Total Cut: 148.59m³		
Total Fill: 4903.48m³		

Scale 1:500

C02	RG	RG	RG
C02	RG	RG	RG

Abley Letchford
www.ableyletchford.co.uk

Client
**MILLER HOMES
KIER VENTURES
KINGACRE ESTATES LTD.**

Project
**SOUTH WOKINGHAM SDL
R10-R14 LINK ROAD
DETAILED DESIGN**

Title
ISOPACHYTE LAYOUT

Status
FOR CONSTRUCTION

Scale 1:500 @ A0	Date MAY 2025	Project RG	Checked RF
Drawing No A389-LRDD-402	Revision C02		