


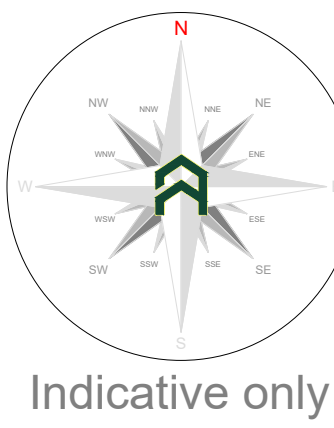

Tree Work Schedule

No.	Species	Works	Category
T15A	Cherry Laurel	Fall: Remove trees & grind stump.	C1
T15B	Prunus	Fall: Remove tree & grind stump.	C1

All tree work is to be undertaken in accordance with British Standard BS 3998:2010 Tree work - Recommendations.

All arising's are to be removed and the site is to be left as found. Care is to be taken of the ground around retained trees to make sure that it does not become compacted as a result of tree surgery operations. No equipment or vehicles such as timber lorries, tractors, excavators or cranes shall be parked or driven beneath the crowns of any retained trees, to prevent subsequent compaction and root death.

No. of groups / hedges to be removed			
U	A	B	C
0 (2)	0 (2)	0 (2)	0 (2)

() = Partial removal of a groups

Underground utility apparatus
The installation of underground electrical apparatus and drainage serves any roots present and can change the local hydrology. The installation of underground drainage systems can also be a particular cause should be taken in the routes and methods of installation of all underground apparatus. Where possible, apparatus should be installed in a trench, and the trench should be sealed. It is preferable to keep apparatus together in common ducts, all inspection chambers should be sealed and the trench should be sealed.

Where underground apparatus is to pass within the RPA, detailed design should be undertaken to ensure that the installation is in accordance with the project abutment. In such cases trenchless insertion methods should be used with entry and retrieval pits being located at the ends of the installation. Where the installation is to be undertaken in a trench, the trench should be sealed and the apparatus should be retained and protected excavations should be undertaken using trench shields and manual excavation (broken trench).

Where the installation is to be undertaken in accordance with the National Joint Utilities Agencies (NJUG), the following should be undertaken:

- **Access and egress** – including CCTV cameras and lighting) should be sited to avoid the need for detrimental tree pruning, as such the installation should be undertaken in a trench.
- **Trenches** can be punched back to cause to provide space, though the installation should be undertaken in accordance with the design solution unless this is a suitable management outcome for the project.

The installation should be undertaken in accordance with BS3958:2010.

Rev:	Date:	Notes:



Client: Cayton Park Ltd

Drawing:

Arboricultural Impact Assessment

Based on:

SFH.SITE.PROP.01

Drawing No: Arbtech AIA 01	Rev: --
-------------------------------	------------

Date:	Scale:	Drawn:
Jan 2025	1:100 @ A0	JAG

Key:					
Tree Nos.:	T01	Tree Canopies:		Trunks:	
RPAs:		Category 'U' trees:		Category 'B' trees:	
Category 'B' groups:		Category 'C' trees:		Category 'C' groups:	
Trees to be removed:		Existing Site:		Proposed Site:	

© Adesh Consulting Ltd. 2021