


## WAITROSE WOKINGHAM - BOUNDARY WALL

## WAITROSE WOKINGHAM – BOUNDARY WALL

### H1 – Planning conditions

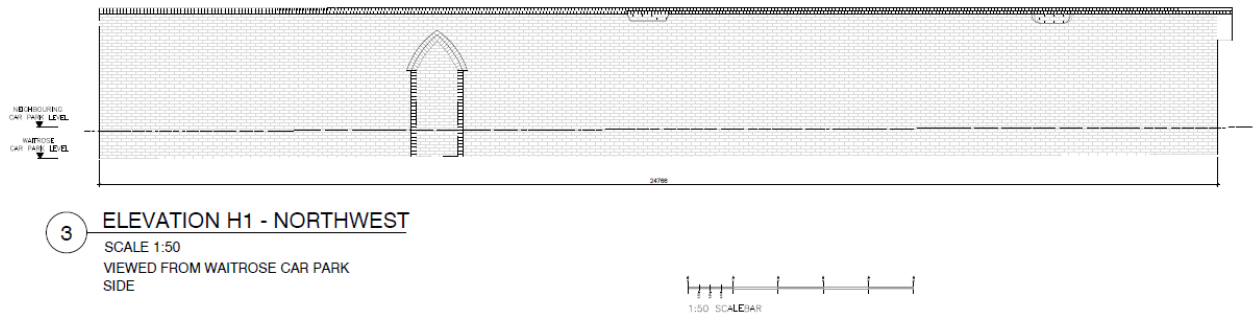

Details and a sample of the lime mortar to be used, including confirmation of the pointing finish to be used.

Mortar mix: Buxton Calbrux quicklime, 3 Morestead sharp sand. (subject to mortar analysis).

Pointing finish as per photographs in sections below.

Details and sample of the bricks and mortar to be used for the construction of the buttresses and the return walling to the end of the wall H1.

Mortar mix: NHL 3.5- 2 silver sand, 1 Lords sharp sand, 1 NHL 3.5 (subject to mortar analysis)



Brick: HG Matthews Handmade imperial light multi 230x110x66 (sample to follow, following assignment of case officer).

## WAITROSE WOKINGHAM - BOUNDARY WALL

### Temporary works methodology statement to maintain stability throughout the works

Temporary works to be installed to perimeter of brick arch, as shown on screenshot below to be installed prior to the build of the buttresses either side, temporary works design to be issued for approval prior to works commencing onsite.

