


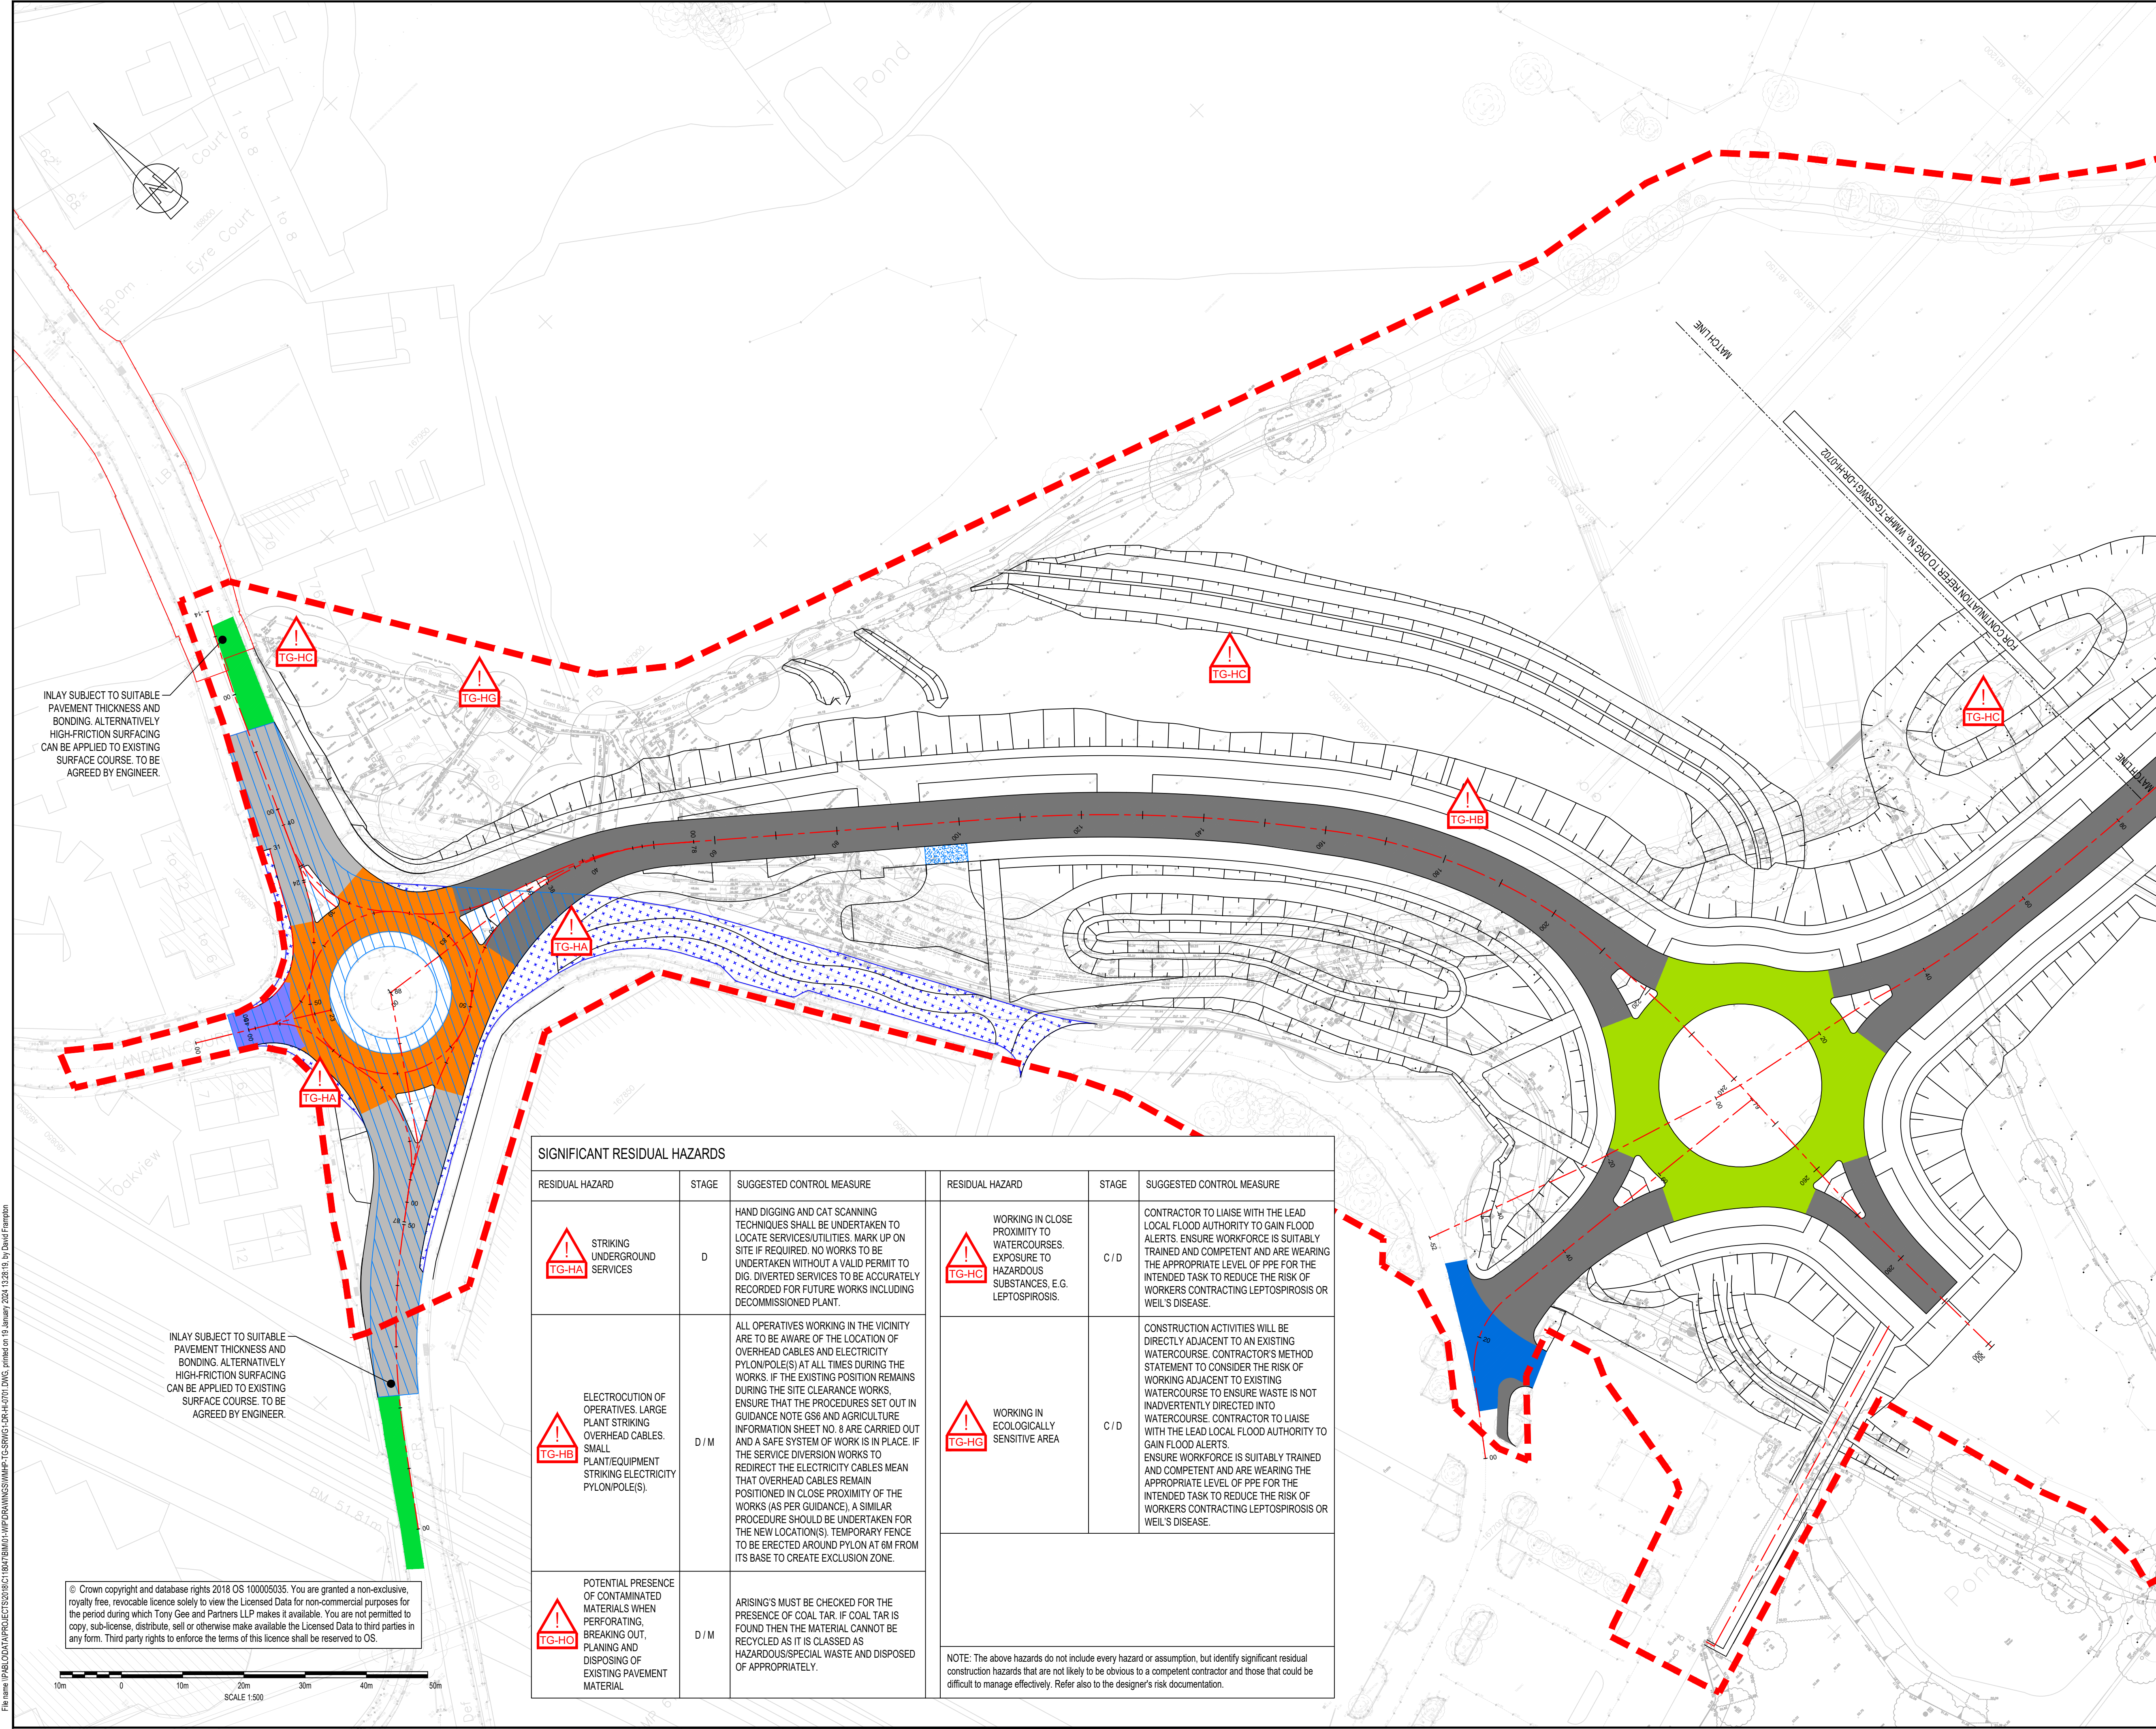

DO NOT SCALE

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.

2. ALL LEVELS ARE IN METRES AOD UNLESS NOTED OTHERWISE.

3. DRAWING TO BE READ IN CONJUNCTION WITH DETAILS DRAWING WMHP-TG-SRWG1-DR-HI-0721 AND SPECIFICATION REF: WMHP-TG-SRWG1-SP-HI-0701.

4. FOR DETAILS OF KERBS AND FOOTWAYS REFER TO DRAWINGS WMHP-TG-SRWG1-DR-HI-1101 TO WMHP-TG-SRWG1-DR-HI-1107.

LEGEND

RED LINE BOUNDARY

TYPE A - MAINLINE

TYPE B - BRIDGE DECK

TYPE C - FINCHAMPSTEAD ROAD

TYPE D - TESCO ROUNDABOUT

TYPE E - FINCHAMPSTEAD ROAD ROUNDABOUT

TYPE F - MINOR ROADS

TYPE G - MAINTENANCE ACCESS

TYPE H - FOOTWAY CROSSOVER

TYPE J - INLAY

TYPE K - OVERLAY

AREAS TO BE PERFORATED OR BROKEN OUT

AREAS TO BE BROKEN OUT

1 2 3 4 5 6 7 8 9

INSET

SHEET LOCATION PLAN

N.T.S

KEYPLAN

SWDR - SPINE ROAD AND WESTERN GATEWAY PHASE 1

P07	19/01/2024	DJF	ROUNDABOUT VE UPDATE	JC	JC
P06	02/06/2022	HD	MATTERS OUTSTANDING WMHP-TG-SRWG1-RG-DM-0010	BH	JC
P05	01/04/2022	MH	INTERNAL REVIEW UPDATES	ARL	JC
REV	DATE	BY	DESCRIPTION	CHK	APP

DRAWING STATUS:

SUITABLE FOR REVIEW & COMMENT

S3

DESIGNER:

Tony Gee

Consulting Civil, Structural and Geotechnical Engineers

Tony Gee and Partners LLP

Hardy House

140 High Street

Esher, Surrey

KT10 9QJ

Tel: 01372 461600

www.tonygee.com

CLIENT:

WOKINGHAM

BOROUGH COUNCIL

Shute End, Wokingham, Berkshire RG40 1BN

Tel: (0118) 974 6000 Web: www.wokingham.gov.uk

PROJECT:

WOKINGHAM MAJOR HIGHWAYS PROGRAMME

SPINE ROAD AND WESTERN GATEWAY PHASE 1

TITLE:

HIGHWAYS

PAVEMENT

PLAN LAYOUT

SHEET 1

SCALE @ A1:	CHECKED:	APPROVED:
1:500	DJF	JC
PROJECT NO:	DESIGNED:	DRAWN:
C118047	DJF	TCH
DRAWING NO:	DATE:	REV:
WMHP-TG-SRWG1-DR-HI-0701	APRIL 21	P07

SIGNIFICANT RESIDUAL HAZARDS					
RESIDUAL HAZARD	STAGE	SUGGESTED CONTROL MEASURE	RESIDUAL HAZARD	STAGE	SUGGESTED CONTROL MEASURE
STRIKING UNDERGROUND SERVICES	D	HAND DIGGING AND CAT SCANNING TECHNIQUES SHALL BE UNDERTAKEN TO LOCATE SERVICES/UTILITIES. MARK UP ON SITE IF REQUIRED. NO WORKS TO BE UNDERTAKEN WITHOUT A VALID PERMIT TO DIG. DIVERTED SERVICES TO BE ACCURATELY RECORDED FOR FUTURE WORKS INCLUDING DECOMMISSIONED PLANT.	WORKING IN CLOSE PROXIMITY TO WATERCOURSES. EXPOSURE TO HAZARDOUS SUBSTANCES, E.G. LEPTOSPIROSIS.	C/D	CONTRACTOR TO LIAISE WITH THE LEAD LOCAL FLOOD AUTHORITY TO GAIN FLOOD ALERTS. ENSURE WORKFORCE IS SUITABLY TRAINED AND COMPETENT AND ARE WEARING THE APPROPRIATE LEVEL OF PPE FOR THE INTENDED TASK TO REDUCE THE RISK OF WORKERS CONTRACTING LEPTOSPIROSIS OR WEIL'S DISEASE.
ELECTROCUTION OF OPERATIVES. LARGE PLANT STRIKING OVERHEAD CABLES. SMALL PLANT/EQUIPMENT STRIKING ELECTRICITY PYLON/POLE(S).	D/M	ALL OPERATIVES WORKING IN THE VICINITY ARE TO BE AWARE OF THE LOCATION OF OVERHEAD CABLES AND ELECTRICITY PYLON/POLE(S) AT ALL TIMES DURING THE WORKS. IF THE EXISTING POSITION REMAINS DURING THE SITE CLEARANCE WORKS, ENSURE THAT THE PROCEDURES SET OUT IN GUIDANCE NOTE G58 AND AGRICULTURE INFORMATION SHEET NO. 8 ARE CARRIED OUT AND A SAFE SYSTEM OF WORK IS IN PLACE. IF THE SERVICE DIVERSION WORKS TO REDIRECT THE ELECTRICITY CABLES MEAN THAT OVERHEAD CABLES REMAIN POSITIONED IN CLOSE PROXIMITY OF THE WORKS (AS PER GUIDANCE), A SIMILAR PROCEDURE SHOULD BE UNDERTAKEN FOR THE NEW LOCATION(S). TEMPORARY FENCE TO BE ERECTED AROUND PYLON AT 6M FROM ITS BASE TO CREATE EXCLUSION ZONE.	WORKING IN ECOLOGICALLY SENSITIVE AREA	C/D	CONSTRUCTION ACTIVITIES WILL BE DIRECTLY ADJACENT TO AN EXISTING WATERCOURSE. CONTRACTOR'S METHOD STATEMENT TO CONSIDER THE RISK OF WORKING ADJACENT TO EXISTING WATERCOURSE TO ENSURE WASTE IS NOT INADVERTENTLY DIRECTED INTO WATERCOURSE. CONTRACTOR TO LIAISE WITH THE LEAD LOCAL FLOOD AUTHORITY TO GAIN FLOOD ALERTS. ENSURE WORKFORCE IS SUITABLY TRAINED AND COMPETENT AND ARE WEARING THE APPROPRIATE LEVEL OF PPE FOR THE INTENDED TASK TO REDUCE THE RISK OF WORKERS CONTRACTING LEPTOSPIROSIS OR WEIL'S DISEASE.
POTENTIAL PRESENCE OF CONTAMINATED MATERIALS WHEN PERFORATING, BREAKING OUT, PLANING AND DISPOSING OF EXISTING PAVEMENT MATERIAL	D/M	ARISING'S MUST BE CHECKED FOR THE PRESENCE OF COAL TAR. IF COAL TAR IS FOUND THEN THE MATERIAL CANNOT BE RECYCLED AS IT IS CLASSIFIED AS HAZARDOUS/SPECIAL WASTE AND DISPOSED OF APPROPRIATELY.	NOTE: The above hazards do not include every hazard or assumption, but identify significant residual construction hazards that are not likely to be obvious to a competent contractor and those that could be difficult to manage effectively. Refer also to the designer's risk documentation.		

File name: P:\BOLTON\PROJECTS\2018\01\1847\BOLTON\WOKINGHAM\WOKINGHAM MAJOR HIGHWAYS PROGRAMME\SPINE ROAD AND WESTERN GATEWAY PHASE 1\DWG, printed on 13 January 2024 13:28:19, by David Frampton