


File name: S:\PROJECTS\2018\18047\BIM\01-WIP\DRAWINGS\WMHP-TG-SRWG1-DR-HI-0732.DWG, printed on 30 September 2021 14:35:44, by Ben Hawkins

SIGNIFICANT RESIDUAL HAZARDS					
RESIDUAL HAZARD	STAGE	SUGGESTED CONTROL MEASURE	RESIDUAL HAZARD	STAGE	SUGGESTED CONTROL MEASURE
 WORKING IN CLOSE PROXIMITY TO WATERCOURSES. EXPOSURE TO HAZARDOUS SUBSTANCES, E.G. LEPTOSPIROSIS.	C / D	CONTRACTOR TO LIAISE WITH THE LEAD LOCAL FLOOD AUTHORITY TO GAIN FLOOD ALERTS. ENSURE WORKFORCE IS SUITABLY TRAINED AND COMPETENT AND ARE WEARING THE APPROPRIATE LEVEL OF PPE FOR THE INTENDED TASK TO REDUCE THE RISK OF WORKERS CONTRACTING LEPTOSPIROSIS OR WEIL'S DISEASE.	 WORKING IN ECOLOGICALLY SENSITIVE AREA	C / D	CONSTRUCTION ACTIVITIES WILL BE DIRECTLY ADJACENT TO AN EXISTING WATERCOURSE. CONTRACTOR'S METHOD STATEMENT TO CONSIDER THE RISK OF WORKING ADJACENT TO EXISTING WATERCOURSE TO ENSURE WASTE IS NOT INADVERTENTLY DIRECTED INTO WATERCOURSE. CONTRACTOR TO LIAISE WITH THE LEAD LOCAL FLOOD AUTHORITY TO GAIN FLOOD ALERTS. ENSURE WORKFORCE IS SUITABLY TRAINED AND COMPETENT AND ARE WEARING THE APPROPRIATE LEVEL OF PPE FOR THE INTENDED TASK TO REDUCE THE RISK OF WORKERS CONTRACTING LEPTOSPIROSIS OR WEIL'S DISEASE.
 DANGER OF FALLING FROM WORKING ON HIGH EMBANKMENTS	C / D / M	ENSURE APPROPRIATE RISK ASSESSMENTS ARE USED WHEN WORKING ON TOP OF EMBANKMENTS, WHICH CONSIDER THE GRADIENT OF THE ADJOINING SLOPE AND IDENTIFY APPROPRIATE CONTROLS TO PREVENT OPERATIVES, PLANT AND MATERIALS FROM ENCOUNTERING THE SLOPE.	 WORKING AT HEIGHT ON TOP OF BRIDGES	C / M	ENSURE APPROPRIATE RISK ASSESSMENTS ARE USED WHEN WORKING ON TOP OF BRIDGES, WHICH SHOULD IDENTIFY MITIGATION MEASURES SUCH AS FALL RESTRAINT SYSTEMS, DROP ZONE CONTROL AND MEASURE TO PREVENT OBJECTS FROM FALLING FROM THE BRIDGE.
NOTE: The above hazards do not include every hazard or assumption, but identify significant residual construction hazards that are not likely to be obvious to a competent contractor and those that could be difficult to manage effectively. Refer also to the designer's risk documentation.					

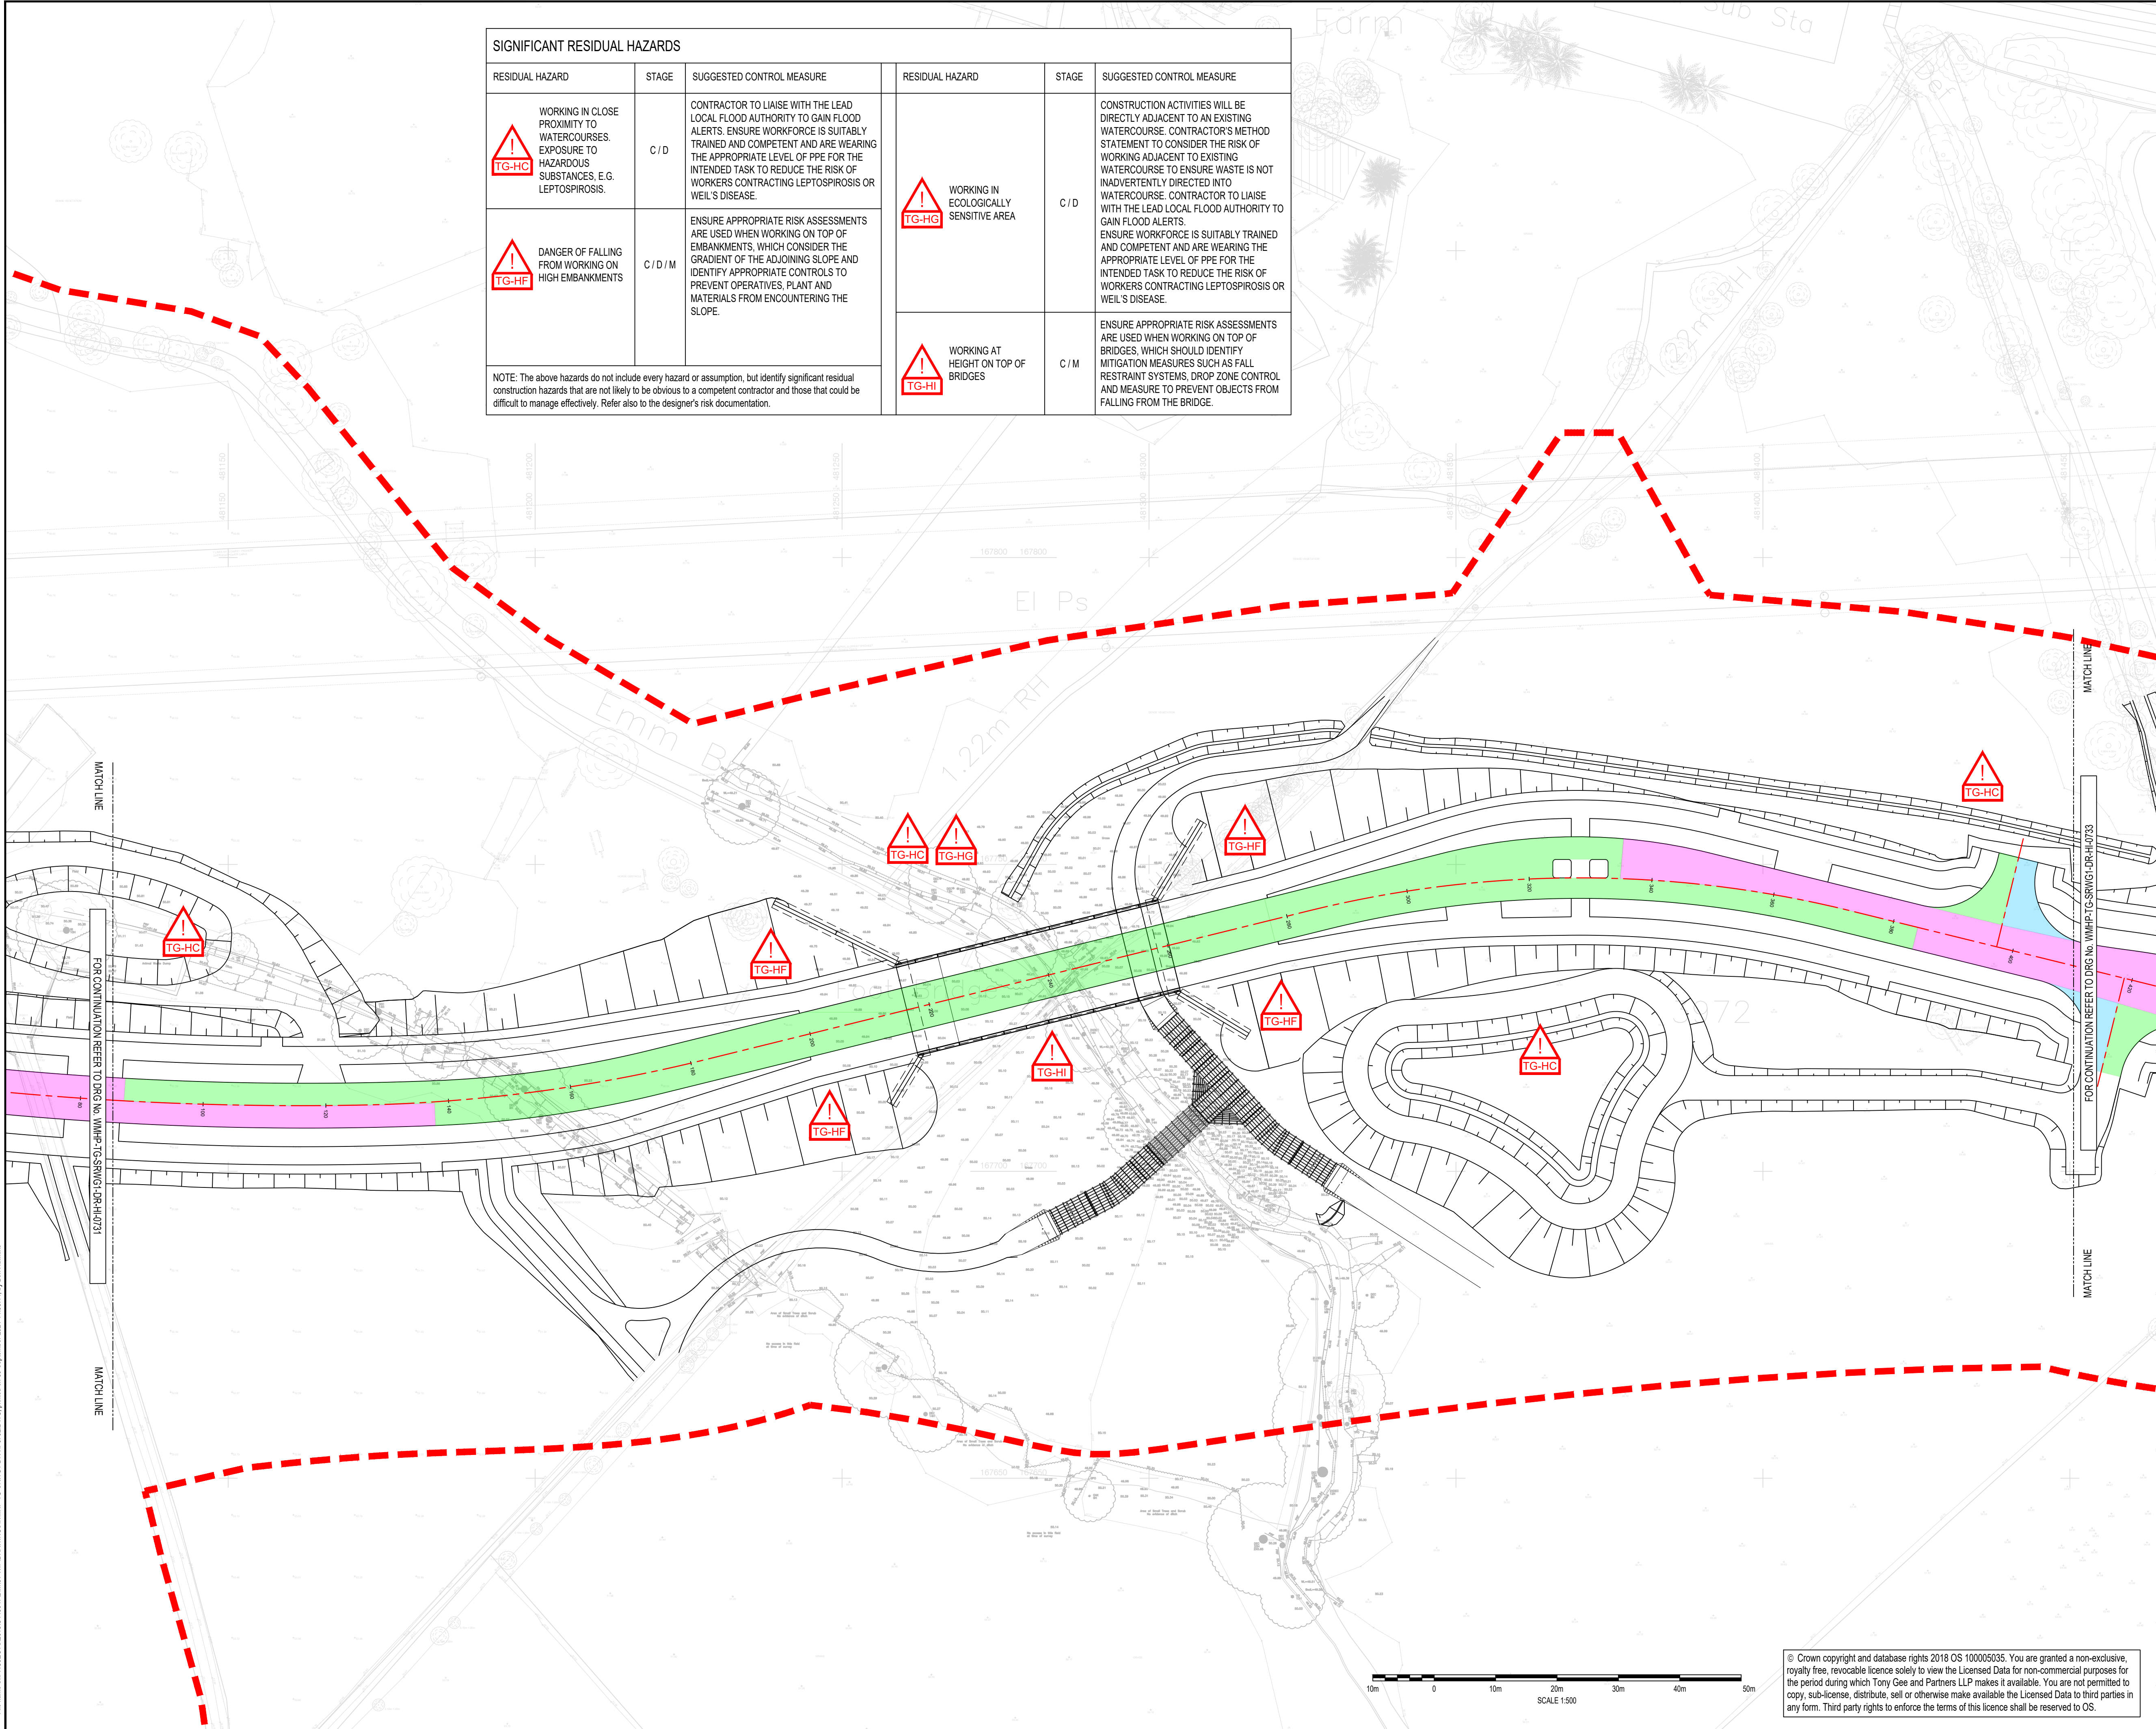

DO NOT SCALE

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.

2. ALL LEVELS ARE IN METRES AOD UNLESS NOTED OTHERWISE.

3. DRAWING TO BE READ IN CONJUNCTION WITH DETAILS DRAWING WMHP-TG-SRWG1-DR-HI-0721 AND SPECIFICATION REF. WMHP-TG-SRWG1-SP-HI-0701.

4. FOR DETAILS OF KERBS AND FOOTWAYS REFER TO DRAWINGS WMHP-TG-SRWG1-DR-HI-1101 TO WMHP-TG-SRWG1-DR-HI-1107.

LEGEND

 RED LINE BOUNDARY

 MAINTENANCE ACCESS NEW SURFACE COURSE (PSV 50 MIN)

 MAINLINE NEW SURFACE COURSE (PSV 53 MIN)

 ROUNDABOUT NEW SURFACE COURSE (PSV 55 MIN)

 ROUNDABOUT / JUNCTION APPROACHES NEW SURFACE COURSE (PSV 60 MIN)

 ROUNDABOUT / JUNCTION APPROACHES NEW SURFACE COURSE (PSV 65 MIN)

 JUNCTION NEW SURFACE COURSE (PSV 65 MIN)

 JUNCTION NEW SURFACE COURSE (PSV 68+ MIN)

 BENDS WITH A RADIUS < 100m NEW SURFACE COURSE (PSV 68+ MIN)

1

2

3

4

5

6

7

8


9

INSET

SHEET LOCATION PLAN

N.T.S.

KEYPLAN:

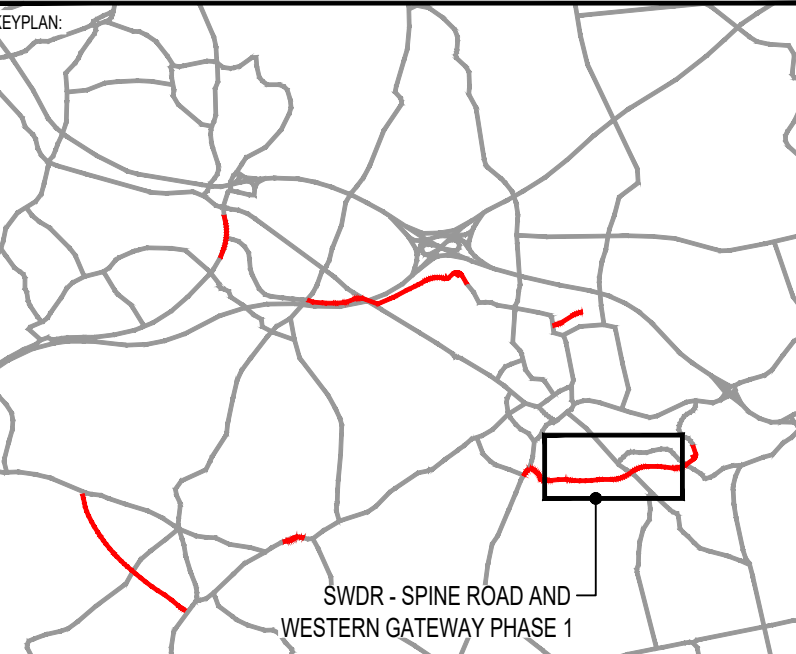

SWDR - SPINE ROAD AND WESTERN GATEWAY PHASE 1

P03	20/09/2021	BH	REVISED FOR PLANNING DISCHARGE	JC	ARL
P02	20/08/2021	JF	REVISED FOR PLANNING DISCHARGE AND SCO COMMENTS	DJF	JC
P01	26/05/2021	TCH	FIRST ISSUE	DJF	JC
REV	DATE	BY	DESCRIPTION	CHK	APP

SUITABLE FOR REVIEW & COMMENT

S3

DESIGNER:



Tony Gee

Consulting Civil, Structural and Geotechnical Engineers

Tony Gee and Partners LLP

Hardy House

140 High Street

Esher, Surrey

KT10 9QJ

Tel: 01372 461600

www.tonygee.com

CONTRACTOR:



CLIENT:



WOKINGHAM

BOROUGH COUNCIL

Shute End, Wokingham, Berkshire RG40 1BN

Tel: (0118) 974 6000 Web: www.wokingham.gov.uk

PROJECT:

WOKINGHAM MAJOR HIGHWAYS PROGRAMME

SPINE ROAD AND WESTERN GATEWAY PHASE 1

TITLE:

HIGHWAYS

SURFACING

PLAN LAYOUT

SHEET 2

SCALE @ A1:

1:500

CHECKED:

DJF

APPROVED:

JC

PROJECT NO:

C118047

DESIGNED:

DJF

DRAWN:

TCH

DATE:

APRIL 21

DRAWING NO:

WMHP-TG-SRWG1-DR-HI-0732

REV:

P03

© Crown copyright and database rights 2018 OS 100005035. You are granted a non-exclusive, royalty free, revocable licence solely to view the Licensed Data for non-commercial purposes for the period during which Tony Gee and Partners LLP makes it available. You are not permitted to copy, sub-license, distribute, sell or otherwise make available the Licensed Data to third parties in any form. Third party rights to enforce the terms of this licence shall be reserved to OS.