


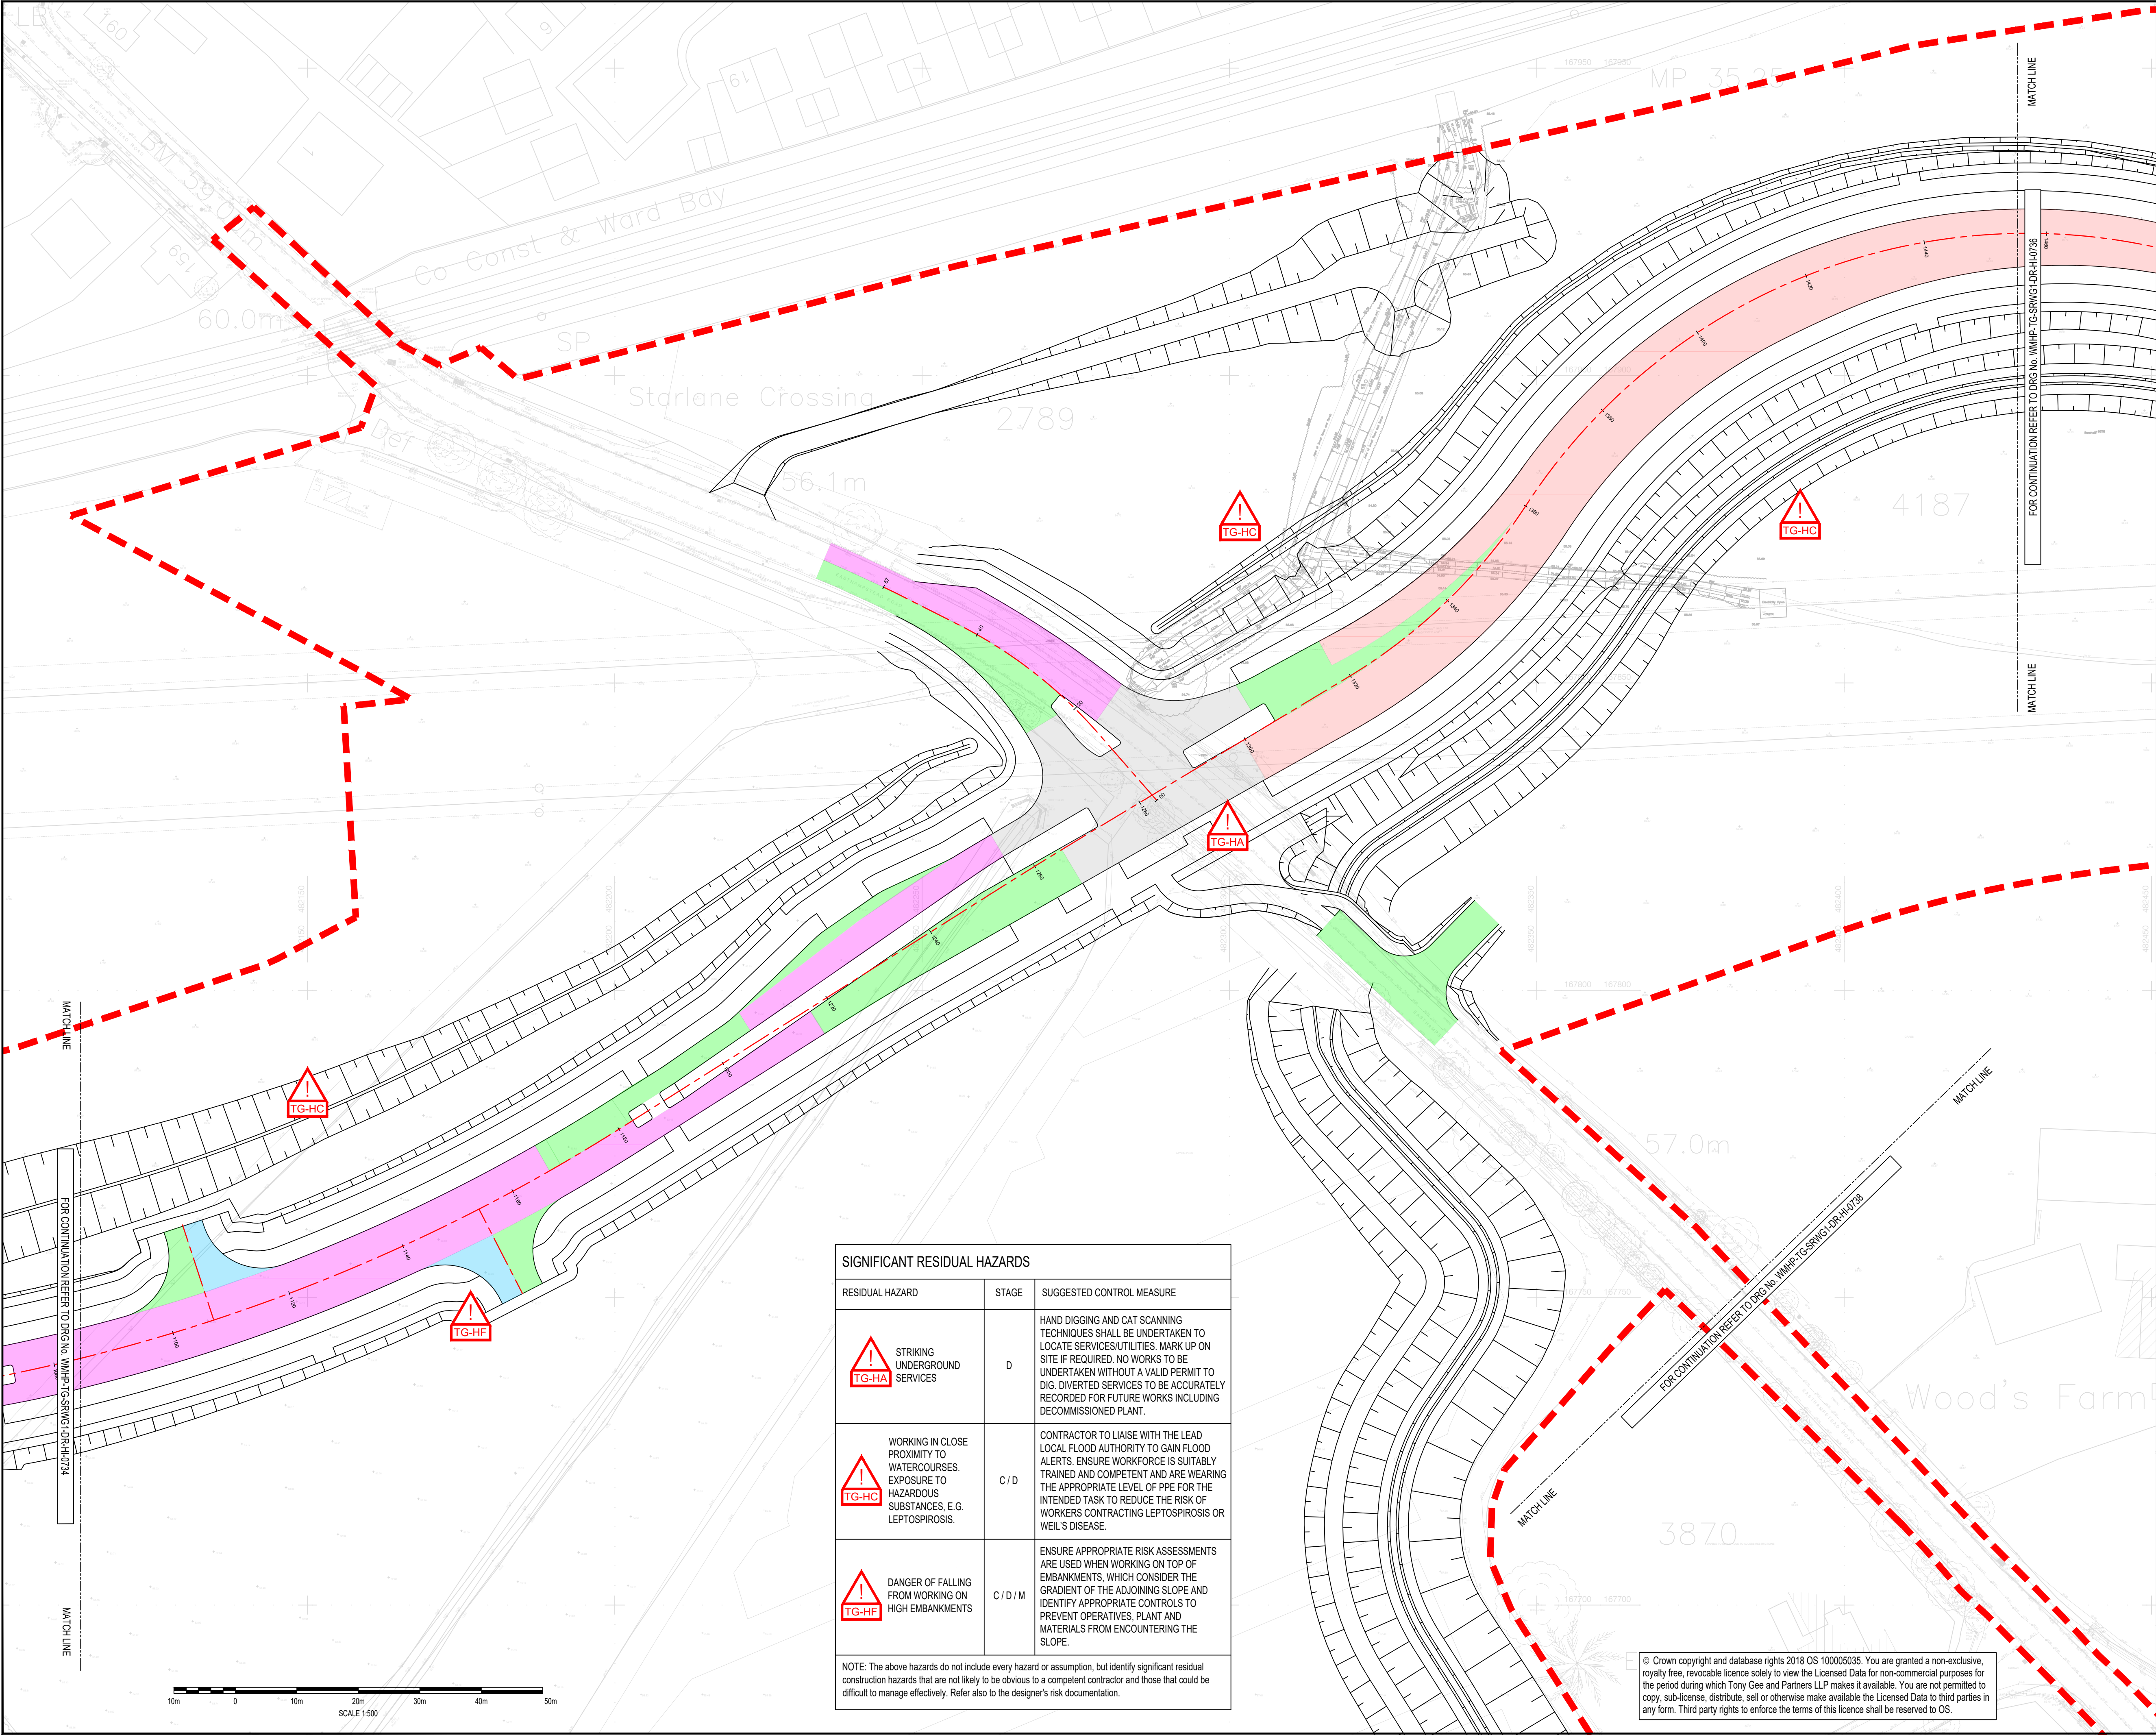

DO NOT SCALE

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.

2. ALL LEVELS ARE IN METRES AOD UNLESS NOTED OTHERWISE.

3. DRAWING TO BE READ IN CONJUNCTION WITH DETAILS DRAWING WMHP-TG-SRWG1-DR-HI-0721 AND SPECIFICATION REF: WMHP-TG-SRWG1-SP-HI-0701.

4. FOR DETAILS OF KERBS AND FOOTWAYS REFER TO DRAWINGS WMHP-TG-SRWG1-DR-HI-1101 TO WMHP-TG-SRWG1-DR-HI-1107.

LEGEND

RED LINE BOUNDARY

MAINTENANCE ACCESS NEW SURFACE COURSE (PSV 50 MIN)

MAINLINE NEW SURFACE COURSE (PSV 53 MIN)

ROUNDABOUT NEW SURFACE COURSE (PSV 55 MIN)

ROUNDABOUT / JUNCTION APPROACHES NEW SURFACE COURSE (PSV 60 MIN)

ROUNDABOUT / JUNCTION APPROACHES NEW SURFACE COURSE (PSV 65 MIN)

JUNCTION NEW SURFACE COURSE (PSV 65 MIN)

JUNCTION NEW SURFACE COURSE (PSV 68+ MIN)

BENDS WITH A RADIUS < 100m NEW SURFACE COURSE (PSV 68+ MIN)

1

2

3

4

5

6

7

8

9

INSET

SHEET LOCATION PLAN

N.T.S.

KEYPLAN

SWDR - SPINE ROAD AND WESTERN GATEWAY PHASE 1

PD3	28/09/2021	BH	REVISED FOR PLANNING DISCHARGE	JC	ARL
PD2	20/08/2021	JF	REVISED FOR PLANNING DISCHARGE AND SCD COMMENTS	DJF	JC
PD1	26/05/2021	TCH	FIRST ISSUE	DJF	JC
REV	DATE	BY	DESCRIPTION	CHK	APP

DRAWING STATUS:

SUITABLE FOR REVIEW & COMMENT

S3

DESIGNER:

Tony Gee

Consulting Civil, Structural and Geotechnical Engineers

Tony Gee and Partners LLP

Hardy House

140 High Street

Esher, Surrey

KT10 9QJ

Tel: 01372 461600

www.tonygee.com

CONTRACTOR:

CLIENT:

WOKINGHAM BOROUGH COUNCIL

Shute End, Wokingham, Berkshire RG40 1BN

Tel: (0118) 974 6000 Web: www.wokingham.gov.uk

PROJECT:

WOKINGHAM MAJOR HIGHWAYS PROGRAMME

SPINE ROAD AND WESTERN GATEWAY PHASE 1

TITLE:

HIGHWAYS

SURFACING

PLAN LAYOUT

SHEET 5

SCALE @ A1:	CHECKED:	APPROVED:
1:500	DJF	JC
PROJECT NO:	DESIGNED:	DRAWN:
C118047	DJF	TCH
DATE:	DATE:	DATE:
APRIL 21		
DRAWING NO:	REV:	
WMHP-TG-SRWG1-DR-HI-0735	P03	

SIGNIFICANT RESIDUAL HAZARDS		
RESIDUAL HAZARD	STAGE	SUGGESTED CONTROL MEASURE
STRIKING UNDERGROUND SERVICES	D	HAND DIGGING AND CAT SCANNING TECHNIQUES SHALL BE UNDERTAKEN TO LOCATE SERVICES/UTILITIES. MARK UP ON SITE IF REQUIRED. NO WORKS TO BE UNDERTAKEN WITHOUT A VALID PERMIT TO DIG. DIVERTED SERVICES TO BE ACCURATELY RECORDED FOR FUTURE WORKS INCLUDING DECOMMISSIONED PLANT.
WORKING IN CLOSE PROXIMITY TO WATERCOURSES. EXPOSURE TO HAZARDOUS SUBSTANCES, E.G. LEPTOSPIROSIS.	C / D	CONTRACTOR TO LIAISE WITH THE LEAD LOCAL FLOOD AUTHORITY TO GAIN FLOOD ALERTS. ENSURE WORKFORCE IS SUITABLY TRAINED AND COMPETENT AND ARE WEARING THE APPROPRIATE LEVEL OF PPE FOR THE INTENDED TASK TO REDUCE THE RISK OF WORKERS CONTRACTING LEPTOSPIROSIS OR WEIL'S DISEASE.
DANGER OF FALLING FROM WORKING ON HIGH EMBANKMENTS	C / D / M	ENSURE APPROPRIATE RISK ASSESSMENTS ARE USED WHEN WORKING ON TOP OF EMBANKMENTS, WHICH CONSIDER THE GRADIENT OF THE ADJOINING SLOPE AND IDENTIFY APPROPRIATE CONTROLS TO PREVENT OPERATIVES, PLANT AND MATERIALS FROM ENCOUNTERING THE SLOPE.
NOTE: The above hazards do not include every hazard or assumption, but identify significant residual construction hazards that are not likely to be obvious to a competent contractor and those that could be difficult to manage effectively. Refer also to the designer's risk documentation.		

© Crown copyright and database rights 2018 OS 100005035. You are granted a non-exclusive, royalty free, revocable licence solely to view the Licensed Data for non-commercial purposes for the period during which Tony Gee and Partners LLP makes it available. You are not permitted to copy, sub-license, distribute, sell or otherwise make available the Licensed Data to third parties in any form. Third party rights to enforce the terms of this licence shall be reserved to OS.