


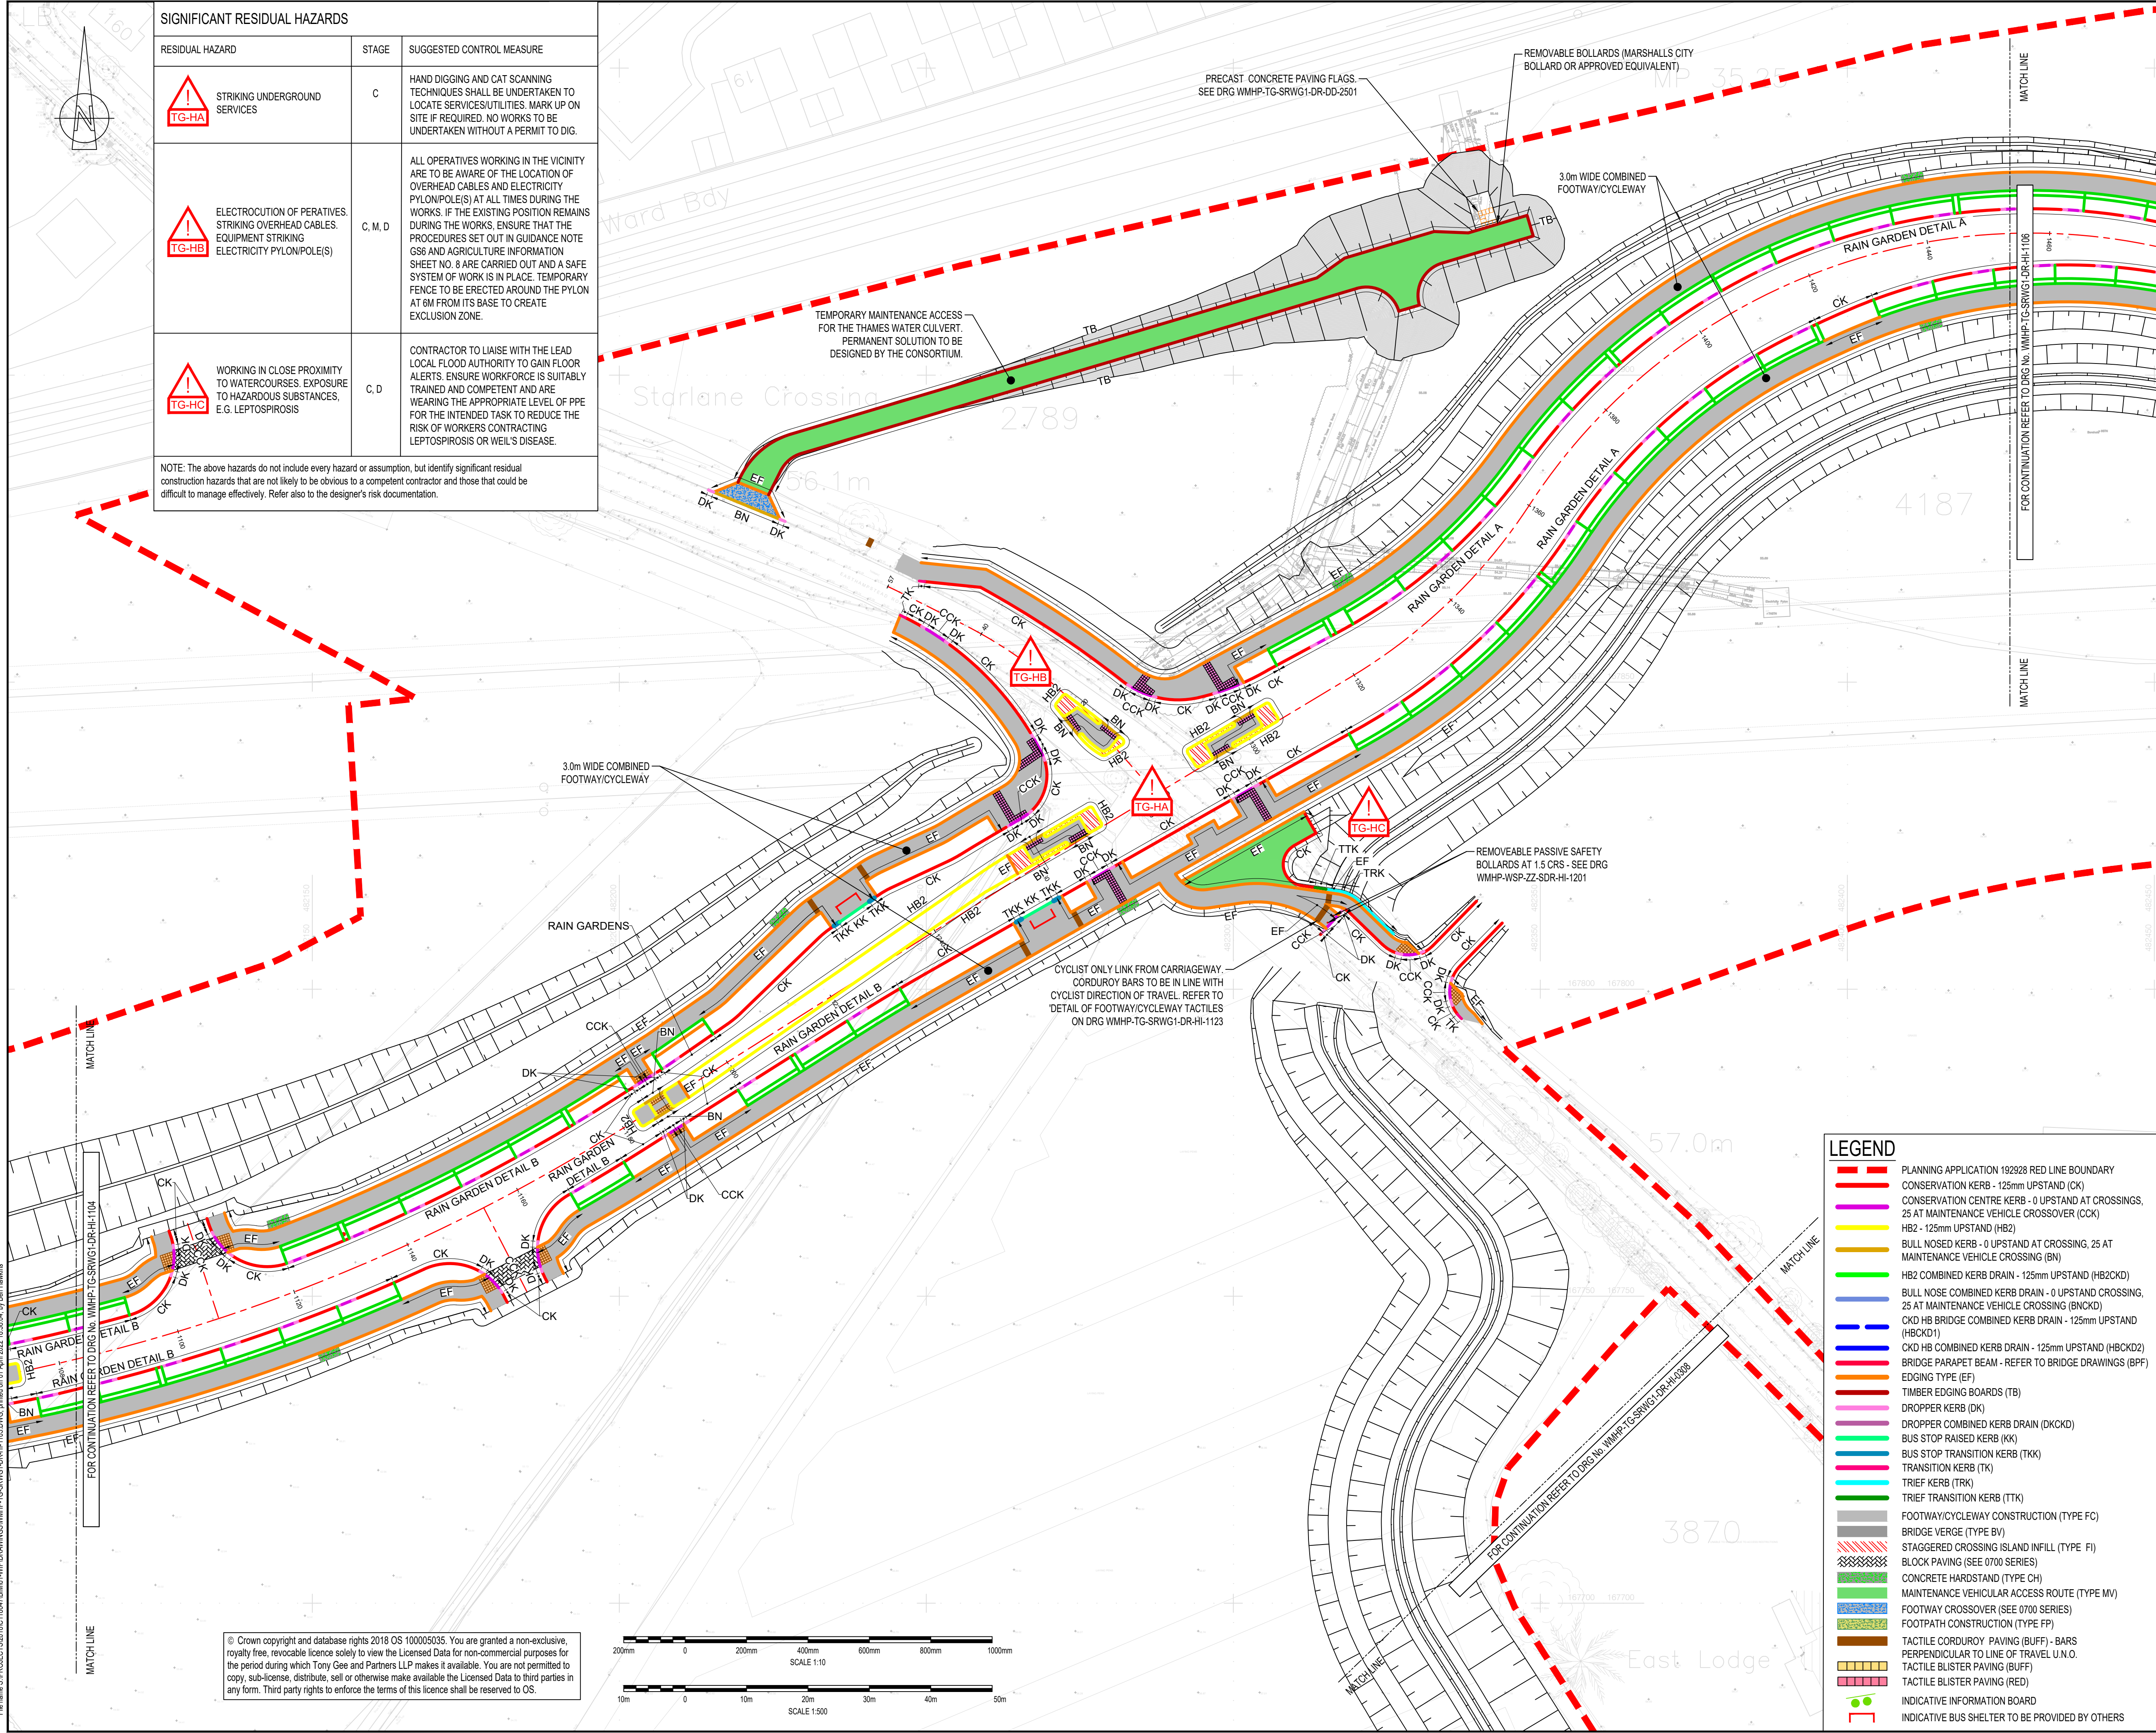

SIGNIFICANT RESIDUAL HAZARDS		
RESIDUAL HAZARD	STAGE	SUGGESTED CONTROL MEASURE
STRIKING UNDERGROUND SERVICES	C	HAND DIGGING AND CAT SCANNING TECHNIQUES SHALL BE UNDERTAKEN TO LOCATE SERVICES/UTILITIES. MARK UP ON SITE IF REQUIRED. NO WORKS TO BE UNDERTAKEN WITHOUT A PERMIT TO DIG.
ELECTROCUTION OF PERATIVES. STRIKING OVERHEAD CABLES. EQUIPMENT STRIKING ELECTRICITY PYLON/POLE(S)	C, M, D	ALL OPERATIVES WORKING IN THE VICINITY ARE TO BE AWARE OF THE LOCATION OF OVERHEAD CABLES AND ELECTRICITY PYLON/POLE(S) AT ALL TIMES DURING THE WORKS. IF THE EXISTING POSITION REMAINS DURING THE WORKS, ENSURE THAT THE PROCEDURES SET OUT IN GUIDANCE NOTE G86 AND AGRICULTURE INFORMATION SHEET NO. 8 ARE CARRIED OUT AND A SAFE SYSTEM OF WORK IS IN PLACE. TEMPORARY FENCE TO BE ERECTED AROUND THE PYLON AT 6M FROM ITS BASE TO CREATE EXCLUSION ZONE.
WORKING IN CLOSE PROXIMITY TO WATERCOURSES. EXPOSURE TO HAZARDOUS SUBSTANCES, E.G. LEPTOSPIROSIS	C, D	CONTRACTOR TO LIAISE WITH THE LEAD LOCAL FLOOD AUTHORITY TO GAIN FLOOR ALERTS. ENSURE WORKFORCE IS SUITABLY TRAINED AND COMPETENT AND ARE WEARING THE APPROPRIATE LEVEL OF PPE FOR THE INTENDED TASK TO REDUCE THE RISK OF WORKERS CONTRACTING LEPTOSPIROSIS OR WEIL'S DISEASE.
NOTE: The above hazards do not include every hazard or assumption, but identify significant residual construction hazards that are not likely to be obvious to a competent contractor and those that could be difficult to manage effectively. Refer also to the designer's risk documentation.		

DO NOT SCALE

NOTES:
1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.
2. ALL LEVELS ARE IN METRES AOD UNLESS NOTED OTHERWISE.
3. DRAWING TO BE READ IN CONJUNCTION WITH SPECIFICATION WMHP-TG-SRWG1-SP-HI-1101.
4. REFER TO DRAWING WMHP-TG-SRWG1-DR-HI-1121 FOR KERB DETAILS.
5. REFER TO DRAWING WMHP-TG-SRWG1-DR-HI-1122 FOR FOOTWAY CONSTRUCTION AND SURFACING DETAILS.
6. REFER TO DRAWING WMHP-TG-SRWG1-DR-HI-1123 AND WMHP-TG-SRWG1-DR-HI-1124 FOR DETAILS OF TACTILE PAVING.
7. FOR DETAILS OF COMBINED KERB DRAINAGE UNITS REFER TO 500 SERIES.
8. REFER TO DRAWING WMHP-TG-SRWG1-DR-HI-1125 FOR RAIN GARDEN DETAILS.
9. FOR RAIN GARDEN KERB LAYOUT REFER TO INSET A.

SHEET LOCATION PLAN
N.T.S.

SWOR - SPINE ROAD AND WESTERN GATEWAY PHASE 1

PM4	01/04/2022	MH	REVISED FOR PLANNING DISCHARGE	JC	ARL
PM3	29/09/2021	AT	REVISED FOR SCO COMMENTS	BH	JC
PM2	10/08/2021	JF	REVISED FOR PLANNING DISCHARGE AND SCO COMMENTS	BH	JC
REV	DATE	BY	DESCRIPTION	CHK	APP

DRAWING STATUS: SUITABLE FOR REVIEW & COMMENT S3

DESIGNER:

Tony Gee and Partners LLP
Hardy House
140 High Street
Esher, Surrey
KT10 9QJ
Tel: 01372 461600
www.tonygee.com
Consulting Civil, Structural and Geotechnical Engineers

CONTRACTOR:

CLIENT:

WOKINGHAM BOROUGH COUNCIL
Shute End, Wokingham, Berkshire RG40 1BN
Tel: (0118) 974 6000 Web: www.wokingham.gov.uk

PROJECT:

WOKINGHAM MAJOR HIGHWAYS PROGRAMME
SPINE ROAD AND WESTERN GATEWAY PHASE 1

TITLE:

HIGHWAYS
KERBS AND FOOTWAY
PLAN LAYOUT

SHEET 5

SCALE @ AT:	CHECKED:	APPROVED:
1:500	BH	JC
PROJECT NO:	DESIGNED:	DRAWN:
C118047	MH	TCH
DRAWING NO:	DATE:	REV:
WMHP-TG-SRWG1-DR-HI-1105	June 21	P04

© Crown copyright and database rights 2018 OS 100005035. You are granted a non-exclusive, royalty free, revocable licence solely to view the Licensed Data for non-commercial purposes for the period during which Tony Gee and Partners LLP makes it available. You are not permitted to copy, sub-license, distribute, sell or otherwise make available the Licensed Data to third parties in any form. Third party rights to enforce the terms of this licence shall be reserved to OS.