


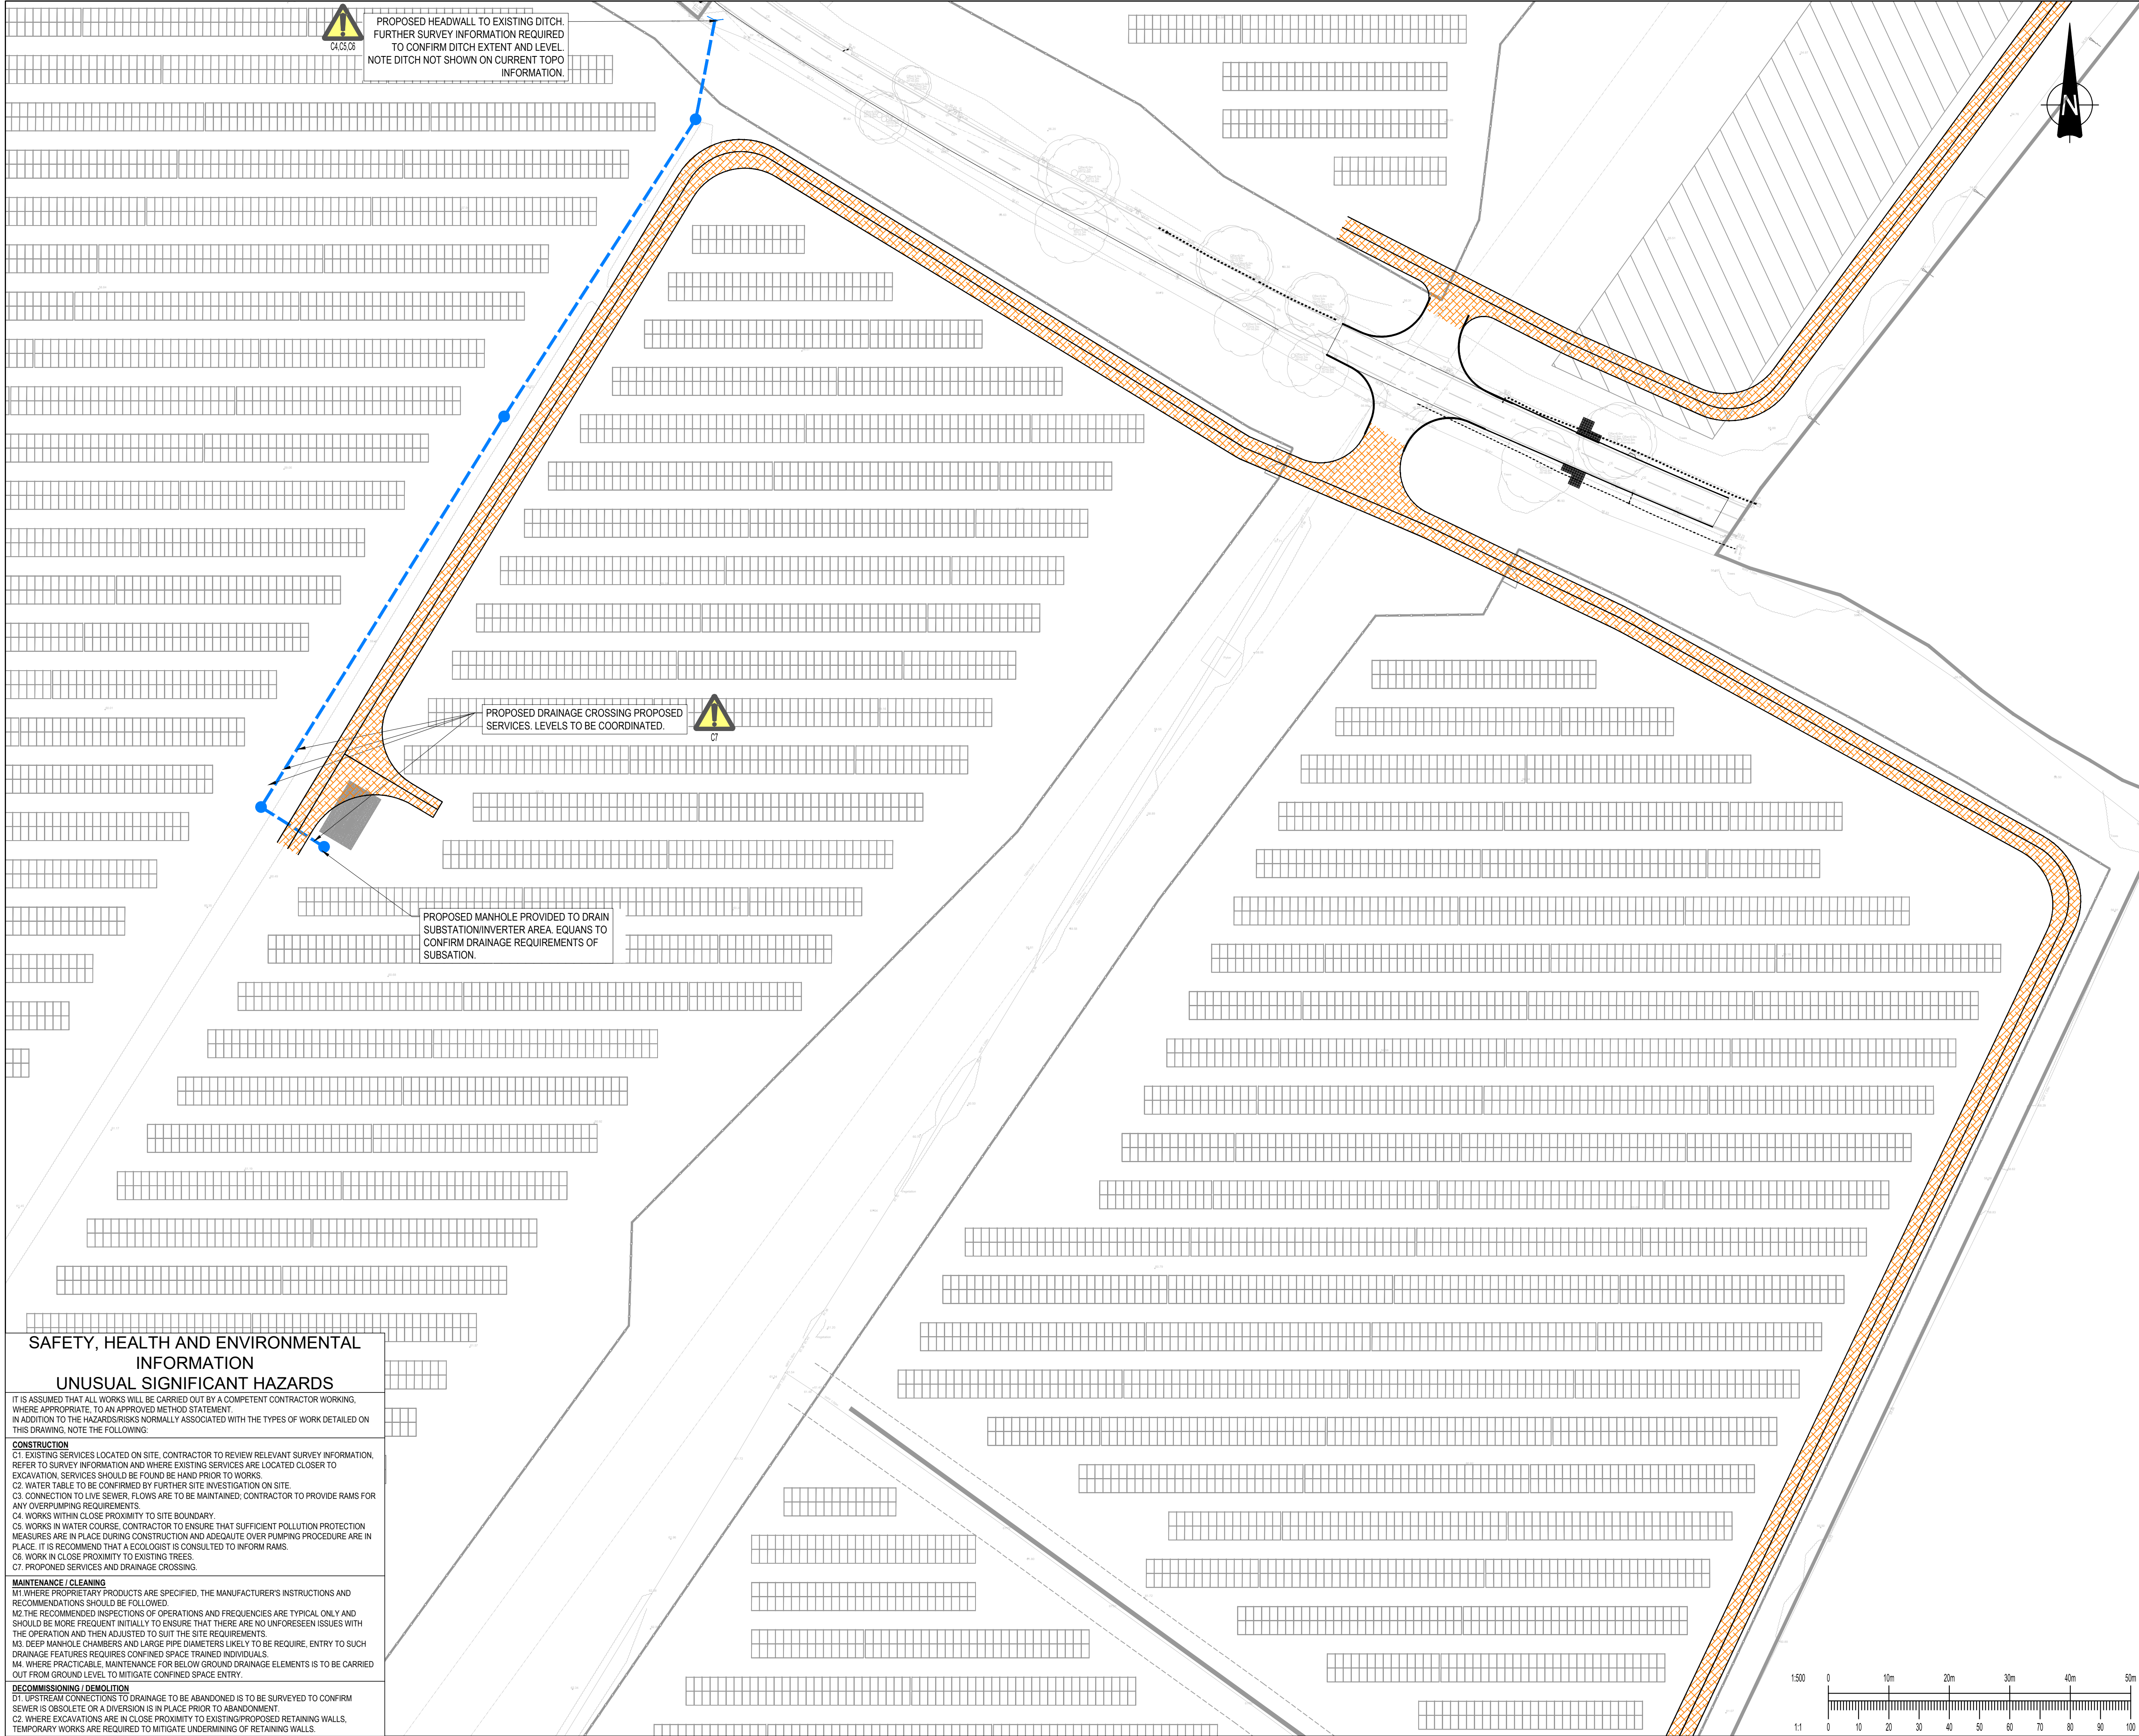

GENERAL NOTES:

1. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL RELEVANT ARCHITECTS AND ENGINEERS DRAWINGS AND SPECIFICATIONS.

2. DO NOT SCALE THIS DRAWING. ANY AMBIGUITIES, OMISSIONS AND ERRORS ON DRAWINGS SHALL BE BROUGHT TO THE ENGINEERS ATTENTION IMMEDIATELY. ALL DIMENSIONS MUST BE CHECKED / VERIFIED ON SITE.

3. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.

4. FOR GENERAL NOTES REFER TO DRAWING.

5. TOPOGRAPHICAL SURVEY RECEIVED FROM EQUANS.. DRAWING REF 230633-CAT-XX-XX-M3-G-00001

DESIGN RISKS

- HEADWALL LOCATIONS SUBJECT TO APPROVAL OF OWCS.

- HAUL ROADS ASSUMED TO DRAIN VIA GRAVEL BUILD UP AS PER WSP APPROVED DRAINAGE STRATEGY, BRE INFILTRATION TESTING YIELDED LIMITED INFILTRATION AS SUCH RISK OF LLFA REQUEST FULL DRAINAGE STRATEGY.

- REVISED HAUL ROAD ALIGNMENTS SUBJECT TO ACCEPTANCES FROM DESIGN TEAM.

- NO LEVEL INFORMATION DITCHES PROVIDED ON TOPO, DOSING SUBJECT TO CHANGE UNTIL DITCH LEVELS CONFINED.

LEGEND

PROPOSED SW DRAIN

PROPOSED SW MANHOLE

PROPOSED HEADWALL

PROPOSED PERMEABLE HAUL ROAD

P01	WIP ISSUE	13/09/24	EB	MM
Rev:	Description:	Date:	By:	Chkd:

Curtins

40 Compton Street, London, EC1V 0BD
020 7324 2240
london@curtins.com
www.curtins.com

Civils & Structures • Transport Planning • Environmental • Infrastructure • Geotechnical • Conservation & Heritage • Principal Designer
Birmingham • Bristol • Cambridge • Cardiff • Douglas • Dublin • Edinburgh • Glasgow • Kendal • Leeds • Liverpool • London • Manchester • Nottingham

Status:

WORK IN PROGRESS

S0

Project:

BARKHAM SOLAR FARM

Dwg Title:

PROPOSED DRAINAGE
GENERAL ARRAIGNMENT -
SHEET 2

Drawn By	Designed By	Checked By
EB	MM	MM
	Date	Scales @ A1
	13/09/24	1:500

Project No - Originator - Function - Spatial - Form - Discipline - Number

BFSF -CURT- XX -DR - C - 9201

Revision

P01

SAFETY, HEALTH AND ENVIRONMENTAL
UNUSUAL SIGNIFICANT HAZARDS

IT IS ASSUMED THAT ALL WORKS WILL BE CARRIED OUT BY A COMPETENT CONTRACTOR WORKING, WHERE APPROPRIATE, TO AN APPROVED METHOD STATEMENT.
IN ADDITION TO THE HAZARDS/RISKS NORMALLY ASSOCIATED WITH THE TYPES OF WORK DETAILED ON THIS DRAWING, NOTE THE FOLLOWING:

CONSTRUCTION

C1. EXISTING SERVICES LOCATED ON SITE. CONTRACTOR TO REVIEW RELEVANT SURVEY INFORMATION, REFER TO SURVEY INFORMATION AND WHERE EXISTING SERVICES ARE LOCATED CLOSER TO EXCAVATION, SERVICES SHOULD BE FOUND BE HAND PRIOR TO WORKS.
C2. WATER TABLE TO BE CONFIRMED BY FURTHER SITE INVESTIGATION ON SITE.
C3. CONNECTION TO LIVE SEWER, FLOWS ARE TO BE MAINTAINED; CONTRACTOR TO PROVIDE RAMS FOR ANY OVERSPILLING REQUIREMENTS
C4. WORKS WITHIN CLOSE PROXIMITY TO SITE BOUNDARY.
C5. WORKS IN WATER COURSE, CONTRACTOR TO ENSURE THAT SUFFICIENT POLLUTION PROTECTION MEASURES ARE IN PLACE DURING CONSTRUCTION AND ADEQUATE OVER PUMPING PROCEDURE ARE IN PLACE. IT IS RECOMMEND THAT A ECOLOGIST IS CONSULTED TO INFORM RAMS.
C6. WORK IN CLOSE PROXIMITY TO EXISTING TREES.
C7. PROPONED SERVICES AND DRAINAGE CROSSING.

MAINTENANCE / CLEANING

M1. WHERE PROPRIETARY PRODUCTS ARE SPECIFIED, THE MANUFACTURER'S INSTRUCTIONS AND RECOMMENDATIONS SHOULD BE FOLLOWED.
M2. THE RECOMMENDED INSPECTIONS OF OPERATIONS AND FREQUENCIES ARE TYPICAL ONLY AND SHOULD BE MORE FREQUENT INITIALLY TO ENSURE THAT THERE ARE NO UNFORESEEN ISSUES WITH THE OPERATION AND THEN ADJUSTED TO SUIT THE SITE REQUIREMENTS.
M3. DEEP MANHOLE CHAMBERS AND LARGE PIPE DIAMETERS LIKELY TO BE REQUIRE: ENTRY TO SUCH DRAINAGE FEATURES REQUIRES CONFINED SPACE TRAINED INDIVIDUALS.
M4. WHERE PRACTICABLE, MAINTENANCE FOR BELOW GROUND DRAINAGE ELEMENTS IS TO BE CARRIED OUT FROM GROUND LEVEL TO MITIGATE CONFINED SPACE ENTRY.

DECOMMISSIONING / DEMOLITION

D1. UPSTREAM CONNECTIONS TO DRAINAGE TO BE ABANDONED IS TO BE SURVEYED TO CONFIRM SEWER IS OBSOLETE OR A DIVERSION IS IN PLACE PRIOR TO ABANDONMENT.
C2. WHERE EXCAVATIONS ARE IN CLOSE PROXIMITY TO EXISTING/PROPOSED RETAINING WALLS, TEMPORARY WORKS ARE REQUIRED TO MITIGATE UNDERMINING OF RETAINING WALLS.

1:500

0 10m 20m 30m 40m 50m

1:1 0 10 20 30 40 50 60 70 80 90 100

10616-11-Project0305000-000-268999-0001098951 - Barkham Solar Farm\QA\Production\44-Models\Drawings\CA04\021