


Tree Protection Fence

The Tree Protection Fence must be installed as follows:

1. The tree protection fence must be installed before any demolition, groundworks or construction take place.
2. The tree protection fence must be installed in the position shown on the approved Tree Protection Plan, and not estimated.
3. The position of the tree protection fence must be set out by a surveyor if required, with node points marked clearly on site for the fencing contractor to work to using wooden pegs.
4. The tree protection fence must be installed as per the specification given below. Any variation to the specification must be approved by the council.
5. The position of the tree protection fence is approved as part of the planning permission and must not be moved once installed.
6. The tree protection fence must comprise of 'Heras' type wire mesh panels on booms, clamped together with two metal clamps between panels.
7. Each panel must be secured (with galvanised wire or strong cable ties) to a scaffold pole upright driven firmly into the ground.
8. All weather notices must be fixed to every second panel stating, 'Tree Protection Fence - Keep Out'

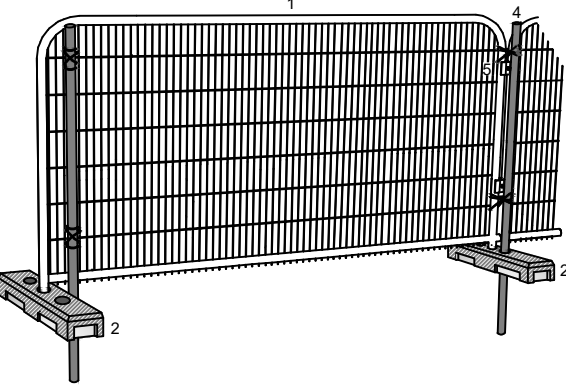

1. Heras type fence panels
2. Concrete or rubber boots
3. Scaffold pole uprights driven firmly into ground, then secured to panels with wire ties, or;
4. Uprights driven firmly into ground through hole in block, then secured to panels with wire ties.
5. Panels to be clamped together with two metal clamps

Phasing of works

Phasing of works in relation to tree protection

Works on site must be carried out in the following order:

- 1) Tree removals
- 2) Tree protection fence installed
- 3) Demolition/site clearance
- 4) Groundworks
- 5) Construction
- 6) Removal of tree protection fencing
- 7) Soft landscaping

Restrictions within tree protection areas

Restrictions within tree protection areas

The purpose of the tree protection fence is to prevent damage to retained trees from following causes:

- Damage to the main trunk, branches and foliage
- Roots being severed as a result of excavation
- Root damage from soil compaction
- Chemical damage

The following restrictions therefore apply within the areas protected by the tree protection fence unless otherwise specified within this report:

- 1) No movement of vehicles or plant machinery
- 2) No excavation
- 3) No hand digging
- 4) No raising or lowering of levels for any reason
- 5) No storage of plant or materials
- 6) No fire lighting such that flames come within 5m of tree foliage.
- 7) No substances injurious to tree health to be used or stored, including fuels, oil, bitumen, cement washings, builders sand, concrete mixing and other chemicals
- 8) Care must also be taken with site operations outside of the fenced off areas to ensure that wide or tall loads, or plant with booms, jibs and counterweights etc. do not cause damage to tree canopies.



TREE CANOPY

TREE TO BE REMOVED

A CATEGORY TREE

B CATEGORY TREE

C CATEGORY TREE

U CATEGORY TREE

ROOT PROTECTION AREA (RPA)

ROOT PROTECTION AREA (RPA)

C CATEGORY TREE

DRAWING TITLE

Tree Protection Plan

CLIENT

B & M Ltd

SITE

School Road
Hurst

SCALE

1:500 @ A1

DATE

25/06/2025

JOB NUMBER

2507

DRAWING NUMBER

002A

DRAWING REFERENCE

TGA.2507.TPP.002A

0 5 10 15 20 25m

REVISION NOTES		
REV	COMMENTS	DATE
002	Original issue	28/11/2022
002A	Updated tree survey & layout	25/06/2025

tga

arboricultural
consultant

www.tgatrees.co.uk

18 Broadwater Lane, Godalming, Surrey, GU7 3JQ

T: 01483 527296 M: 07774 377295 E: tom@tgatrees.co.uk