



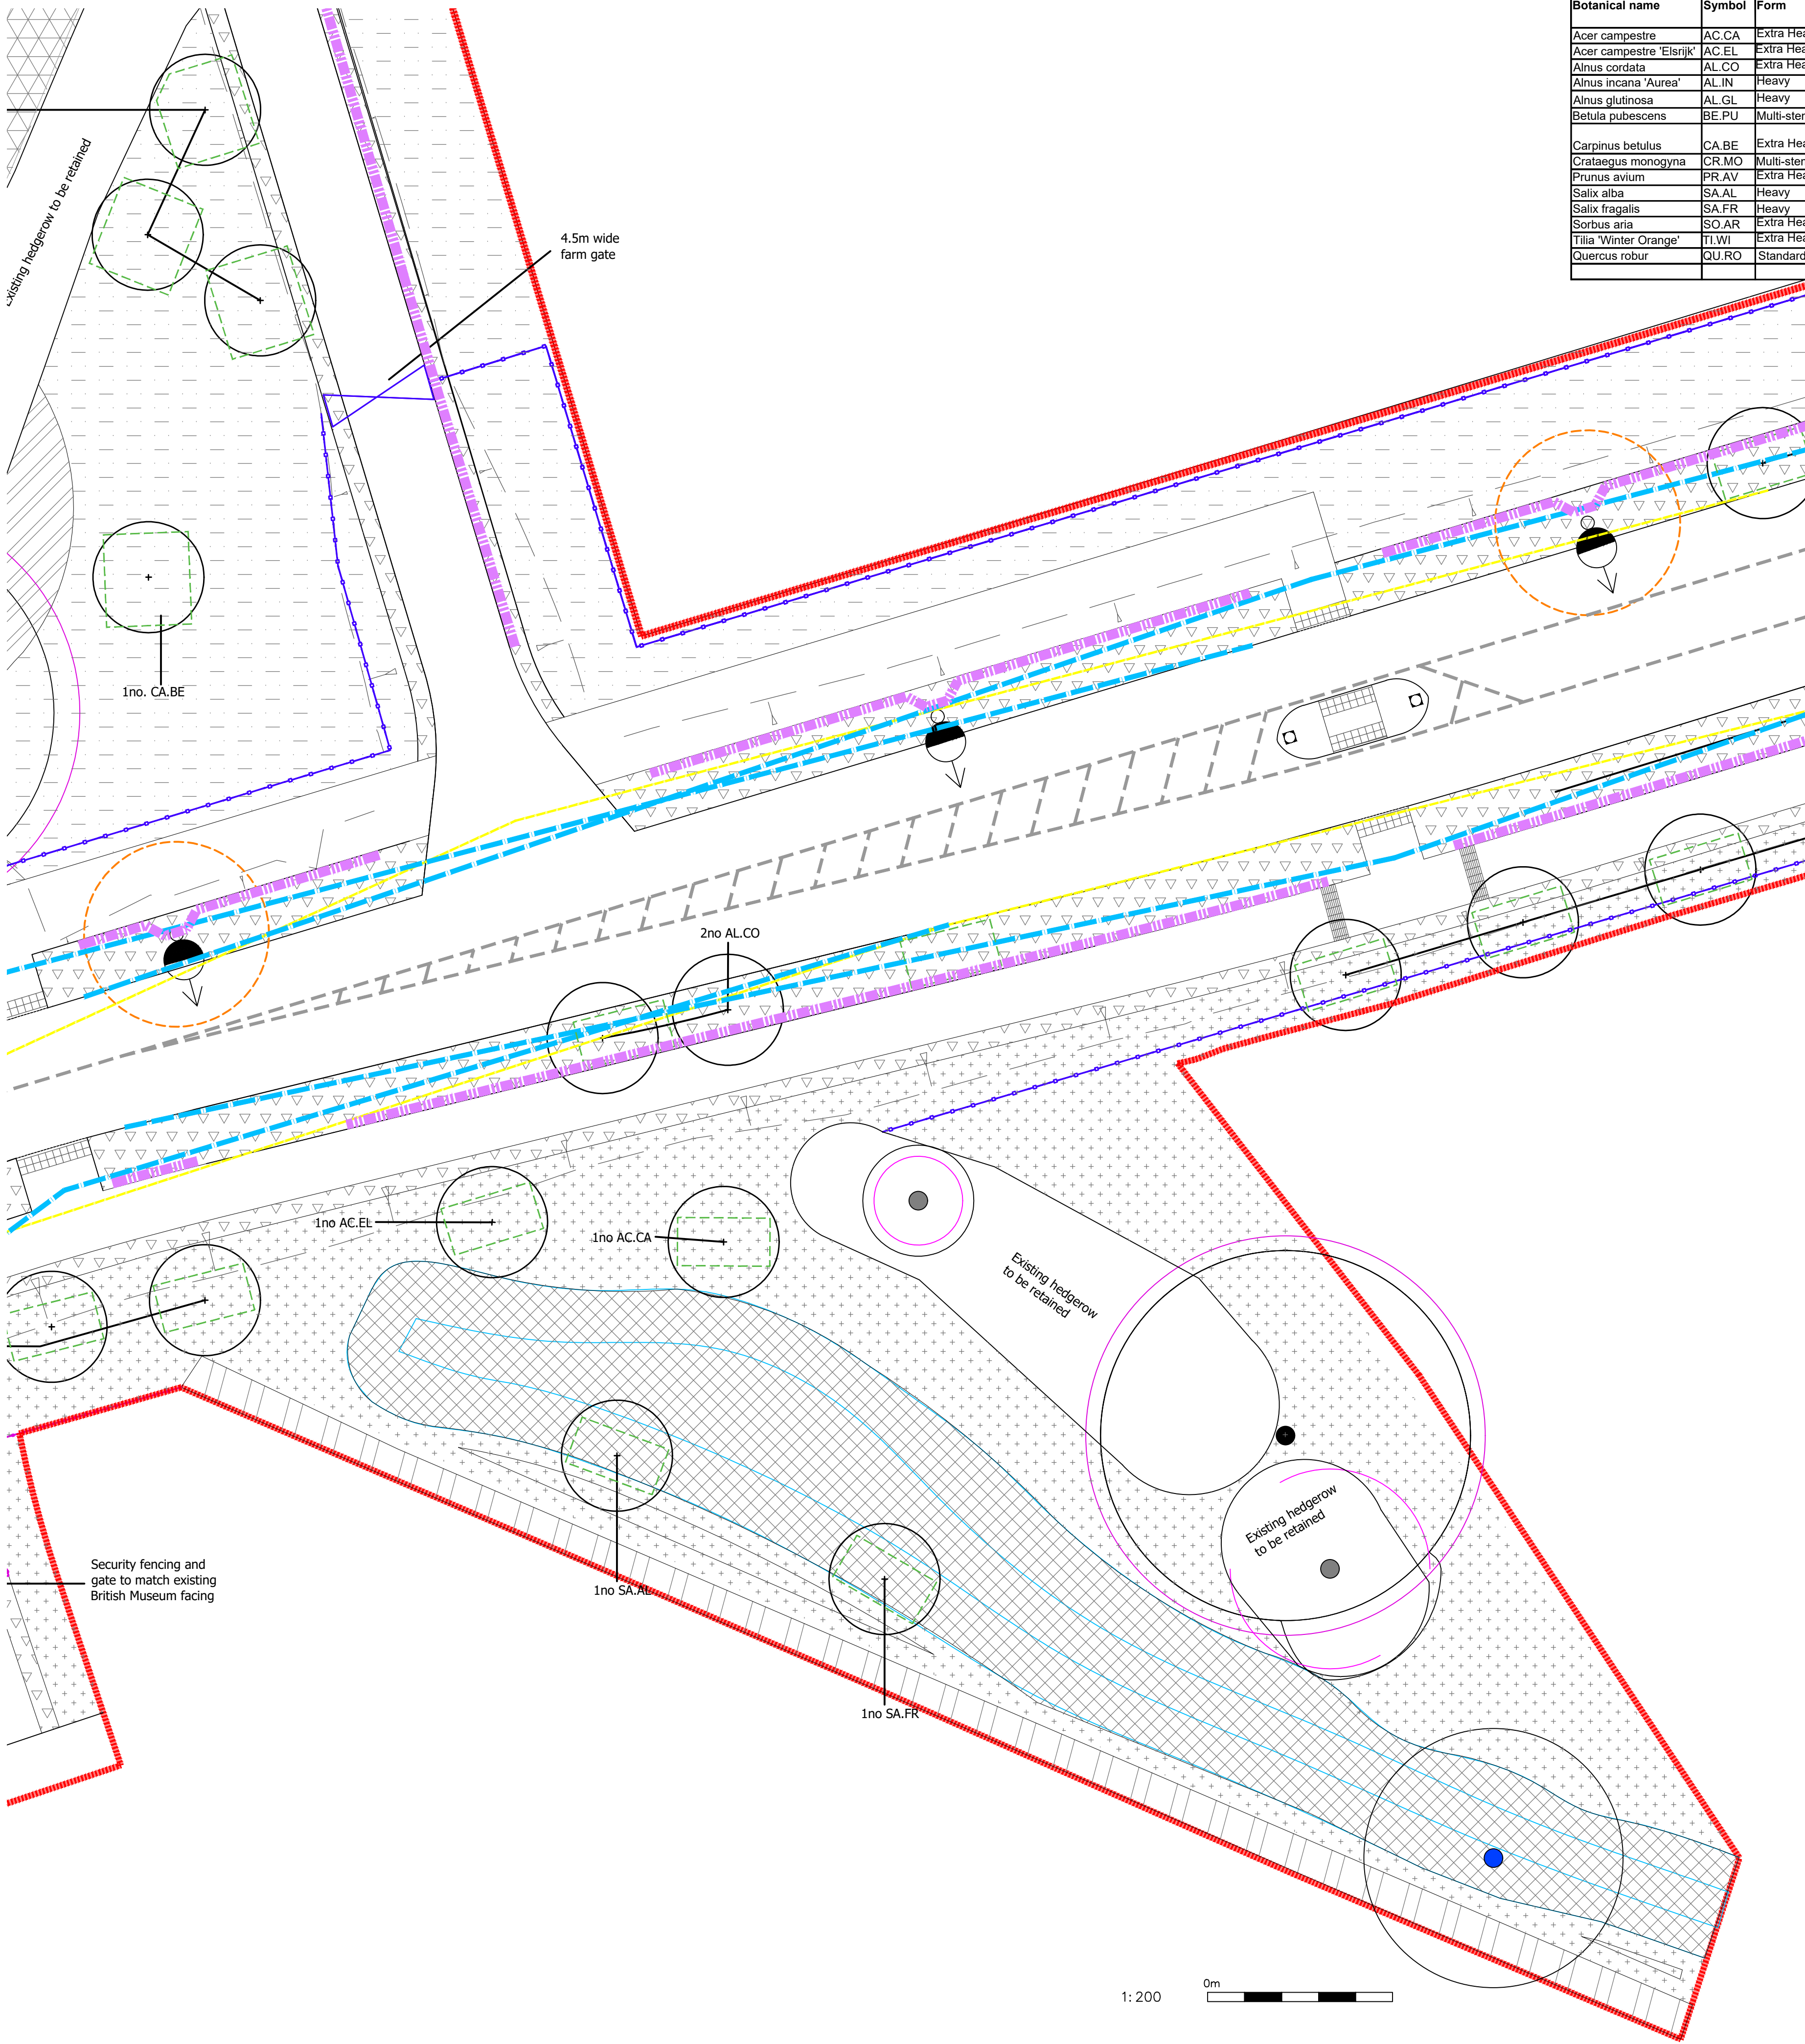

Botanical name	Symbol	Form	Min. supply size (cm)	Clear stem (cm)	Girth (cm)	Transplanted	Root condition	Total no.	Notes
Acer campestre	AC.CA	Extra Heavy	400-450	min.200	14-16	3x	Rootballed or AirPot grown	5	All new trees to have allowance for watering bag, double stake or underground guying and irrigation pipe.
Acer campestre 'Elsrijk'	AC.EL	Extra Heavy	400-450	min.200	14-16	3x		13	
Alnus cordata	AL.CO	Extra Heavy	350-400	min.200	14-16	3x		28	
Alnus incana 'Aurea'	AL.IN	Heavy	350-400	min.200	12-14	3x		1	
Alnus glutinosa	AL.GL	Heavy	350-400	min.200	12-14	3x		7	
Betula pubescens	BE.PU	Multi-stem	200-250			3x	Container	6	
Carpinus betulus	CA.BE	Extra Heavy	400-450	min.200	14-16	3x	Rootballed or AirPot grown	2	
Crataegus monogyna	CR.MO	Multi-stem	200-250			3x	Container	2	
Prunus avium	PR.AV	Extra Heavy	400-450	min.200	14-16	3x	Rootballed or AirPot grown	5	
Salix alba	SA.AL	Heavy	350-400	min.200	12-14	3x		1	
Salix fragilis	SA.FR	Heavy	350-400	min.200	12-14	3x		1	
Sorbus aria	SO.AR	Extra Heavy	400-450	min.200	14-16	3x		2	
Tilia 'Winter Orange'	TI.WI	Extra Heavy	400-450	min.200	14-16	3x		7	
Quercus robur	QU.RO	Standard	250-300	min.200	8-10	3x		1	
Total trees								81	

PL01 - Marginal Planting mix									
Species			Specification			Planting			
Botanical name	Symbol	Form	Container size	Height(cm)		Density/m2 or as noted	% Mix	Notes	
Emorsgate EP1						as specified by the supplier		25%	
PL02 - Pond Edge mix									
Botanical name	Symbol	Form	Container size	Height(cm)		Density/m2 or as noted	% Mix	Notes	
Emorsgate EP1						as specified by the supplier		25%	
AQUATIC									
Butomus umbellatus	482		basket					10%	
Dipsacus fullonum	482		2L					10%	
Hydrocharis morsus	80		2L					5%	
Lythrum salicaria	440		2L					10%	
Menyanthes trifoliata	440		2L					10%	
Nymphaea alba	50		basket					5%	
Vicia sepium			2L					10%	
GRASSES									
Carex x Elytroides	37		basket					5%	
Typha latifolia	27		2L					10%	
PL03 - Wetland Meadow mix									
Botanical name	Symbol	Form	Container size	Height(cm)		Density/m2 or as noted	% Mix	Notes	
Emorsgate EM8						as specified by the supplier			
PL04 - Buffer Scrub mix									
Botanical name	No.	Form	Container size	Height(cm)		Density/m2 or as noted	% Mix	Notes	
SCRUB MIX									
Cornus sanguinea	356		bare root	40-60		2m2	30%	Scrub mix to be planted at 1.5m centres on a grid in a single species group of 3-5	
Crataegus monogyna	149		bare root	40-60		1m2	25%		
Cytisus scoparius	59		bare root	40-60		2m2	5%		
Eucrymus europaeus	59		bare root	40-60		1m2	10%		
Ilex aquifolium	119		bare root	40-60		2m2	10%		
Ligustrum vulgare	59		bare root	40-60		2m2	5%		
Rosa canina	30		bare root	40-60		1m2	5%		
Salix caprea	119		bare root	40-60		2m2	10%		
PL05 - Native Hedgerow mix									
Botanical name	Symbol	Form	Container size	Height(cm)		Density/m2 or as noted	% Mix	Notes	
HEDGEROW MIX									
Acer campestre	92		bare root			7 plants per m	15%	Hedgerow to be planted in a double staggered row, rows, 250mm apart, at 300mm centres	
Corylus avellana	123		bare root				20%		
Crataegus monogyna	123		bare root				20%		
Eucrymus europaeus	31		bare root				5%		
Ilex aquifolium	62		bare root				10%		
Prunus spinosa	31		bare root				5%		
Rosa canina	31		bare root				5%		
Quercus robur	31		bare root				5%		
Viburnum lantana	92		bare root				15%		
PL06 - Road Verge mix									
Botanical name	Symbol	Form	Container size	Height(cm)		Density/m2 or as noted	% Mix	Notes	
Germinal A18 road verge and embankments						as specified by the supplier			
PL07 - Species Rich Lawn mix									
Botanical name	Symbol	Form	Container size	Height(cm)		Density/m2 or as noted	% Mix	Notes	
Festuca rubra commutata						as specified by the supplier	as specified by the supplier		
Festuca rubra trichophylla									
Festuca ovina									
Lolium perenne									
Phleum bertolonii									
Poa pratensis									
PL08 - Road Edge Wildflower mix									
Botanical name	Symbol	Form	Container size	Height(cm)		Density/m2 or as noted	% Mix	Notes	
Emorsgate EM3									

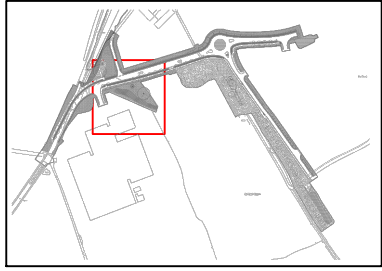

PLANTING NOTES

PREPARATION:

Planting to be undertaken into existing in-situ topsoil, if it is within the parameters of 'sandy loam' as defined in BS3882.

PLANTING:

Plant material to conform to the National Plant Specification. All plant stock to originate from within the UK. Plant handling and planting operations to be in accordance with HTA 'Handling and Establishing Landscape Plants', Parts IIII.

The roots of bare-root plants must be kept covered at all times, to prevent them drying out. Keep small bare-root plants completely within a polythene sack until the moment of planting.

Transplants- To be notch planted or pit planted depending on soil conditions and size of roots, each with 30g 'Sierrablen Flora' slow release fertiliser. Ensure notch is large enough to accommodate roots without bending or breaking. Plant at the same depth transplant was growing at previously. All plants to be fitted with Tubex tree or shrub shelters according to species, securely staked and with full ground contact.

Each tree to be protected from deer by a 1.8m x 300mm diameter weld mesh tree shelter guard. Guard to be secured to 2no. (1.8m x 75mm diameter) softwood timber stake with staples or cable ties.

Planting to be carried out late October to late March, on a mild, damp day. Avoid days with frost or strong, drying winds.

Water immediately after planting.

In case of herbicide application after planting, it should be carried out by a suitably trained person, only in periods of low winds, and with careful directional application to ensure no spray drift. Observe all precautions recommended by the manufacturer and remove containers from site immediately after they have been emptied or are no longer required.

Existing trees to be protected with fencing as specified by the Arboriculturalist.

LEGEND

Site Boundary

SOFTWORKS

Existing tree with RPA

Proposed tree - single stem

Proposed tree - multi-stem

Existing trees to be retained

Category A - High quality

Category B - Moderate quality

Category C - Low quality

PL01 - Marginal Planting mix (Emorsgate EP1 sown at 4g/m²)

PL02 - Pond Edge mix (Emorsgate EP1 sown at 4g/m² & Aquatic mix)

PL03 - Wetland Meadow mix (Emorsgate EM8 sown at 4g/m²)

PL04 - Buffer Scrub mix

PL05 - Native Hedgerow mix

PL06 - Road Verge mix

PL07 - Species Rich Lawn mix, sown at 10g/m²

PL08 - Road Edge Wildflower mix (Emorsgate EM3 - sown at 4g/m²)

Area to be left to allow natural succession. Any concrete road present to be broken up and removed from site

Existing hedge to be retained

Proposed lighting columns Refer to Engineer's drawings

Proposed V mesh security fencing (British Museum) and gate to match existing

Proposed post and 3 rail timber fence

Proposed filter drain

Indicative rootzone area shown as 26m² to provide a volume of 12cu/m

- No Dimensions are to be scaled from this drawing. All dimensions to be checked on site. Area measurements for indicative purposes only.
- Contractors must verify all figured dimensions at site before commencing any work or making any Shop drawings.
- Contractors must verify all figured dimensions at site before commencing any work or making any Shop drawings.
- Reproduced from the Ordnance Survey Map with the permission of the Controller of H.M. Stationary Office Crown copyright license number 100024244 Savills (UK) Limited. Published for the purposes of identification only and although believed to be correct accuracy is not guaranteed.

No.	Revisions	By	Date
A	Draft issue for planning	EM	02.10.23
B	Issue for planning	EM	19.10.23
C	Updates to fencing, footways, planting and key	AJL	10.11.23
D	Updates to tree locations and table	AJL	06.03.24
E	Issue to incorporate planning officers comments	EM	17.04.24
F	Tree pit extents and filter drains added	RA	11.10.24



URBAN DESIGN STUDIO

Client			
University of Reading			
Job			
Thames Valley Science Park Primary Infrastructure			
Drawing Title			
NHM Access Road: Landscape Planting Plan - Sheet 4			
Job No.		Date	
498048		02.10.2023	
Drawn By		Checked By	
EM		RB	
Scale		Drawing No.	Rev.
1:200@A1		LA051	F