




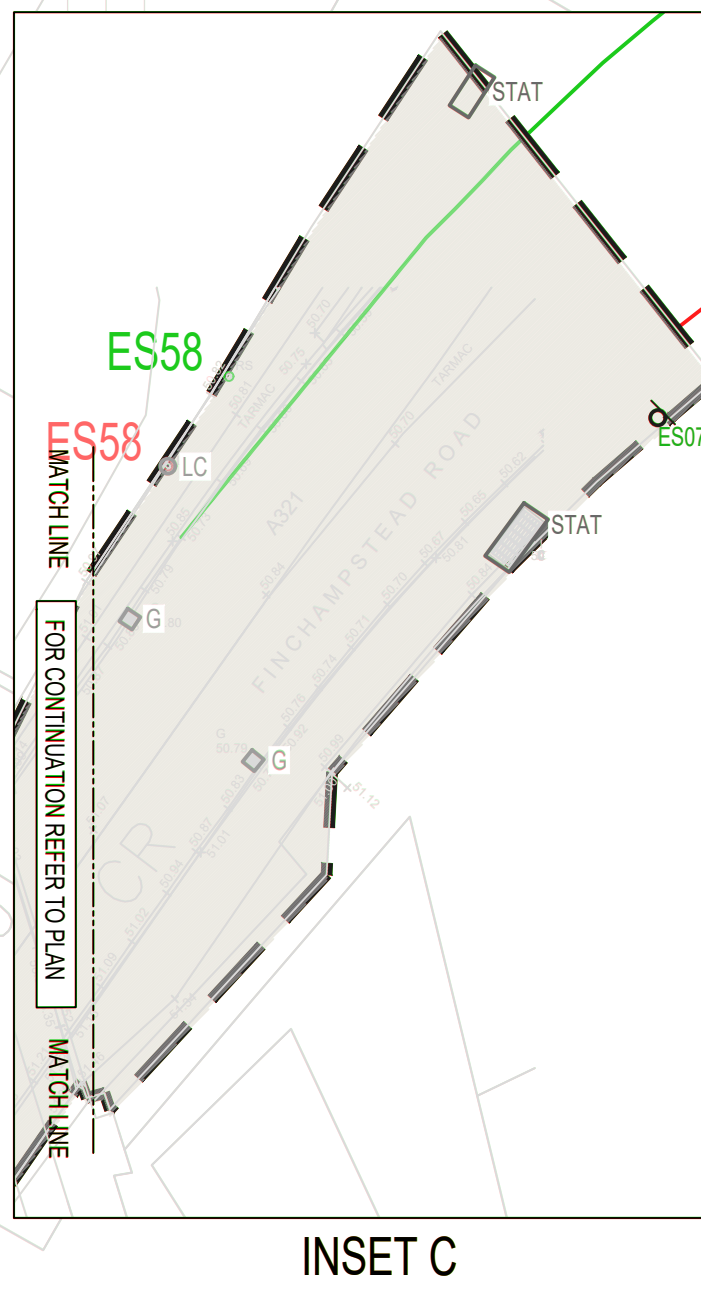

SIGNIFICANT RESIDUAL HAZARDS		
RESIDUAL HAZARD	STAGE	SUGGESTED CONTROL MEASURE
EXCAVATION COLLAPSE DURING REMOVAL OF CHAMBERS AND GULLIES	C	EACH EXCAVATION SHALL BE ASSESSED AND SOIL PROPPING TO BE PROVIDED WHERE SUITABLE TO AVOID SOIL SLIDE / COLLAPSE.
DANGER TO OPERATIVES/PUBLIC WHEN UNDERTAKING TREE FELLING AND VEGETATION CLEARANCE	C/MID	TREE FELLING/VEGETATION CLEARANCE TO BE UNDERTAKEN BY TRAINED AND CERTIFIED PERSONNEL WITH A SAFE SYSTEM OF WORK IN PLACE. NON-AUTHORISED PERSONNEL AND GENERAL PUBLIC TO BE EXCLUDED FROM CONTROLLED DROP ZONE.
STRIKING UNDERGROUND SERVICES	C	HAND DIGGING AND CAT SCANNING TECHNIQUES SHALL BE UNDERTAKEN TO LOCATE SERVICES/UTILITIES. MARK UP ON SITE IF REQUIRED. NO WORKS TO BE UNDERTAKEN WITHOUT A VALID PERMIT TO DIG.
ELECTROCUTION OF OPERATIVES DISCONNECTION ACTIVITIES.	C	ALL ELECTRICAL CIRCUITS MUST BE SUITABLY ISOLATED OR DISCONNECTED AND PROVIDED DEAD BY TRAINED AND COMPETENT WORKFORCE BEFORE COMMENCING WORK. TRAINED AND COMPETENT WORKFORCE. SUITABLE PPE MUST BE WORN.
INJURY OCCURRING DUE TO DEMOLITION OF BUILDINGS, INCLUDING FALLS FROM HEIGHT, INJURY FROM FALLING MATERIALS, UNCONTROLLED COLLAPSE, UNCONNECTED SERVICES, NOISE AND VIBRATION, FIRE AND HAZARDOUS MATERIALS INCLUDING ASBESTOS	C/D	BUILDING DEMOLITION ONLY TO BE UNDERTAKEN BY A SPECIALIST QUALIFIED DEMOLITION CONTRACTOR.
NOTE: The above hazards do not include every hazard or assumption, but identify significant residual construction hazards that are not likely to be obvious to a competent contractor and those that could be difficult to manage effectively. Refer also to the designer's risk documentation.		

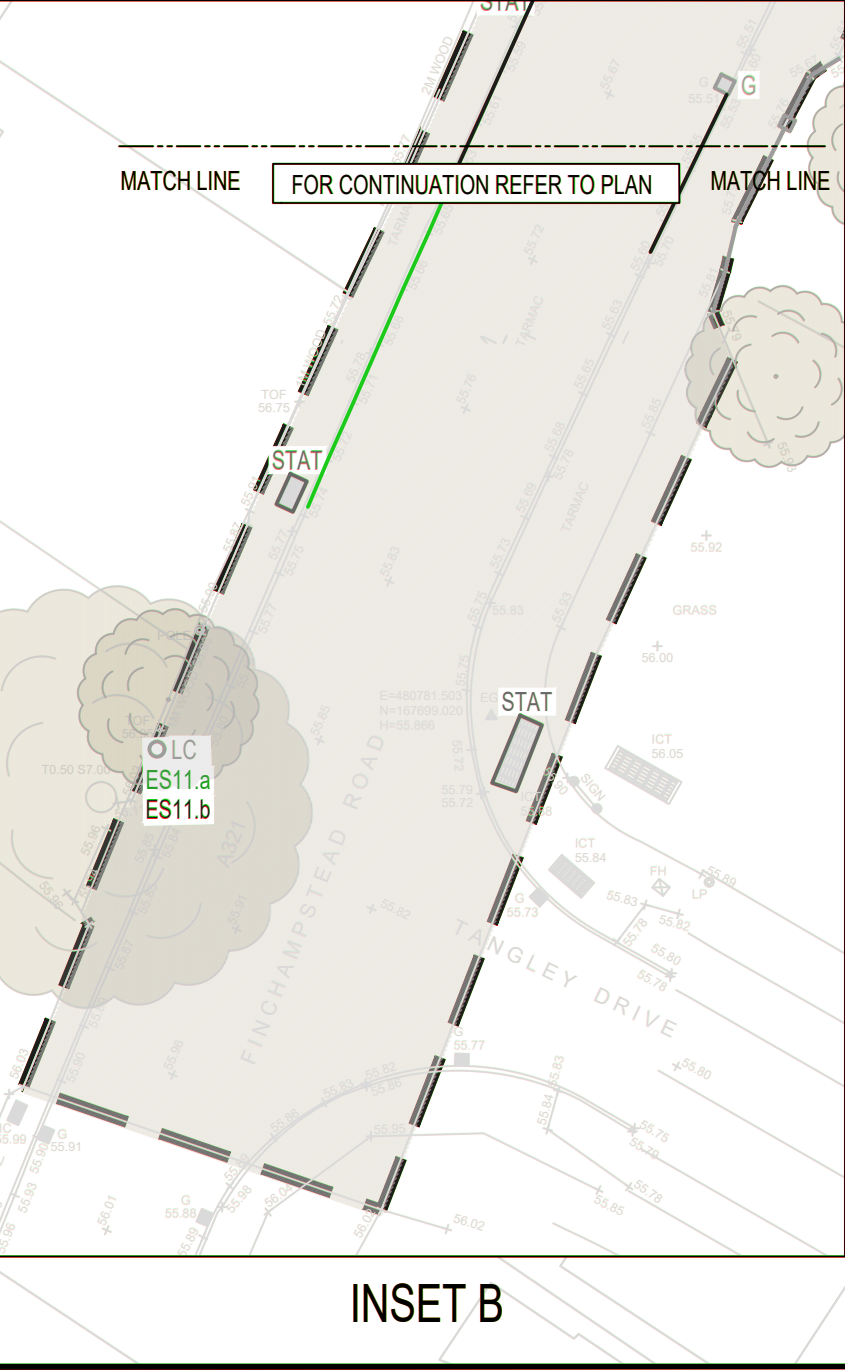

LEGEND	
	SITE BOUNDARY
	EXTENT OF SITE CLEARANCE
	TAKE UP AND REMOVE TO TIP OFF SITE PRECAST CONCRETE KERBS
	FENCING TO BE REMOVED
	FENCING TO BE RETAINED
	LIGHTING COLUMN TO BE REMOVED
	LIGHTING COLUMN TO BE RETAINED
	TRAFFIC SIGNAL HEAD, POLE OR CONNECTION INSPECTION CHAMBER TO BE REMOVED
	TAKE UP AND REMOVE TO TIP OFF SITE TRAFFIC SIGN INCLUDING POST(S)
	TAKE UP AND SET ASIDE FOR REUSE TRAFFIC SIGN, TAKE UP AND REMOVE TO TIP OFF SITE POST(S)
	TRAFFIC SIGN TO BE RETAINED
	TAKE UP AND REMOVE TO TIP OFF SITE GULLY GRATING AND FRAME
	GULLY TO BE RETAINED
	EXISTING COVER TO BE ABANDONED
	EXISTING COVER TO BE RAISED/LOWERED TO PROPOSED LEVELS
	SURFACE WATER DRAINAGE TO BE REMOVED OR FILLED
	STATUTORY PLANT - SEE APPENDIX 1/16 FOR MODIFICATIONS OF STATUTORY UNDERTAKERS EQUIPMENT.
	TAKE UP AND REMOVE TO TIP OFF SITE STREET FURNITURE
	STREET FURNITURE TO TAKEN UP AND SET ASIDE
	STREET FURNITURE TO BE RETAINED
	GATES TO BE REMOVED
	GATES TO BE RETAINED
	TREES TO BE REMOVED
	TREES TO BE RETAINED
	BUILDING WITH ALL ASSOCIATED INFRASTRUCTURE, INCLUDING GARDENS, OUTBUILDINGS, WALLS AND FENCES TO BE REMOVED/DEMOLISHED
	TREES PREVIOUSLY REMOVED TO BE RETAINED
	TREES PREVIOUSLY RETAINED TO BE REMOVED

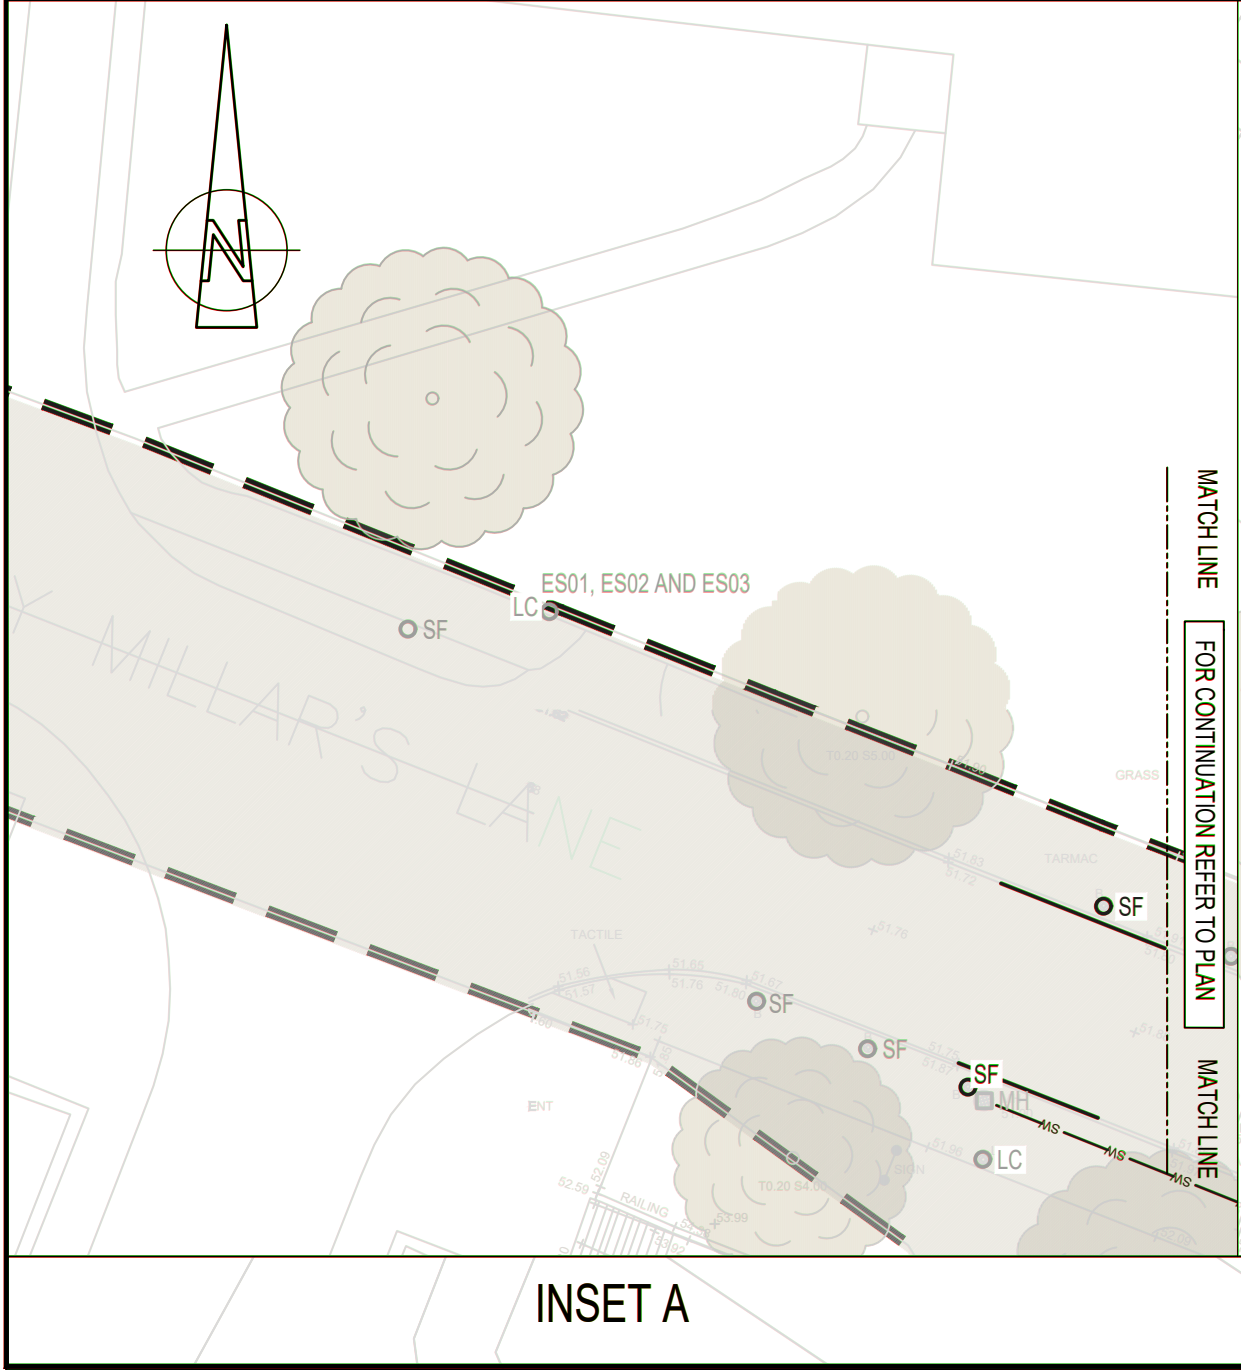

© Crown copyright and database rights 2018 OS 100005035. You are granted a non-exclusive, royalty free, revocable licence solely to view the Licensed Data for non-commercial purposes for the period during which Tony Gee and Partners LLP makes it available. You are not permitted to copy, sub-license, distribute, sell or otherwise make available the Licensed Data to third parties in any form. Third party rights to enforce the terms of this licence shall be reserved to OS.

DO NOT SCALE

NOTES:
1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.
2. ALL LEVELS ARE IN METRES AOD UNLESS NOTED OTHERWISE.
3. DRAWING TO BE READ IN CONJUNCTION WITH SPECIFICATION REFERENCE WMHP-TG-WG2-SP-HI-0201.
4. EXTENTS OF SITE CLEARANCE TO BE CONFIRMED FOLLOWING SUCCESSFUL PLANNING APPLICATION APPROVAL AND ASSOCIATED PLANNING CONDITIONS.

KEYPLAN

SWDR - WESTERN GATEWAY PHASE 2

P06	17/07/2024	JB	MINOR AMENDMENTS	DJF	JC
P05	18/07/2024	JBH	REMOVED FROM PLANNING APPLICATION FOR EASEMENTS	BH	JC
P04	05/08/2023	GMC	FAST TRACK OUTSTANDING WMHP-TG-WG2-SP-HI-0201	BH	JC
REV	DATE	BY	DESCRIPTION	CHK	APP

DRAWING STATUS:

SUITABLE FOR EXAMINATION

S8

DESIGNER:

Tony Gee
Consulting Civil, Structural and Geotechnical Engineers

Tony Gee and Partners LLP
Hardy House
140 High Street
Esher, Surrey
KT10 9QJ
Tel: 01372 461600
www.tonygee.com

CONTRACTOR:

Balfour Beatty

CLIENT:

WOKINGHAM BOROUGH COUNCIL
Shute End, Wokingham, Berkshire RG40 1BN
Tel: (0118) 974 6000 Web: www.wokingham.gov.uk

PROJECT:

WOKINGHAM MAJOR HIGHWAYS PROGRAMME
SWDR WESTERN GATEWAY PHASE 2

TITLE:

ROUNDAABOUT ENHANCEMENT
SITE CLEARANCE
PLAN

SCALE @ A1:	1:250	CHECKED:	BH	APPROVED:	JC
PROJECT NO:	C118048	DESIGNED:	MH	DRAWN:	MH
DRAWING NO:	WMHP-TG-WG2-DR-HI-0201	DATE:	March 21	REV:	

P08