


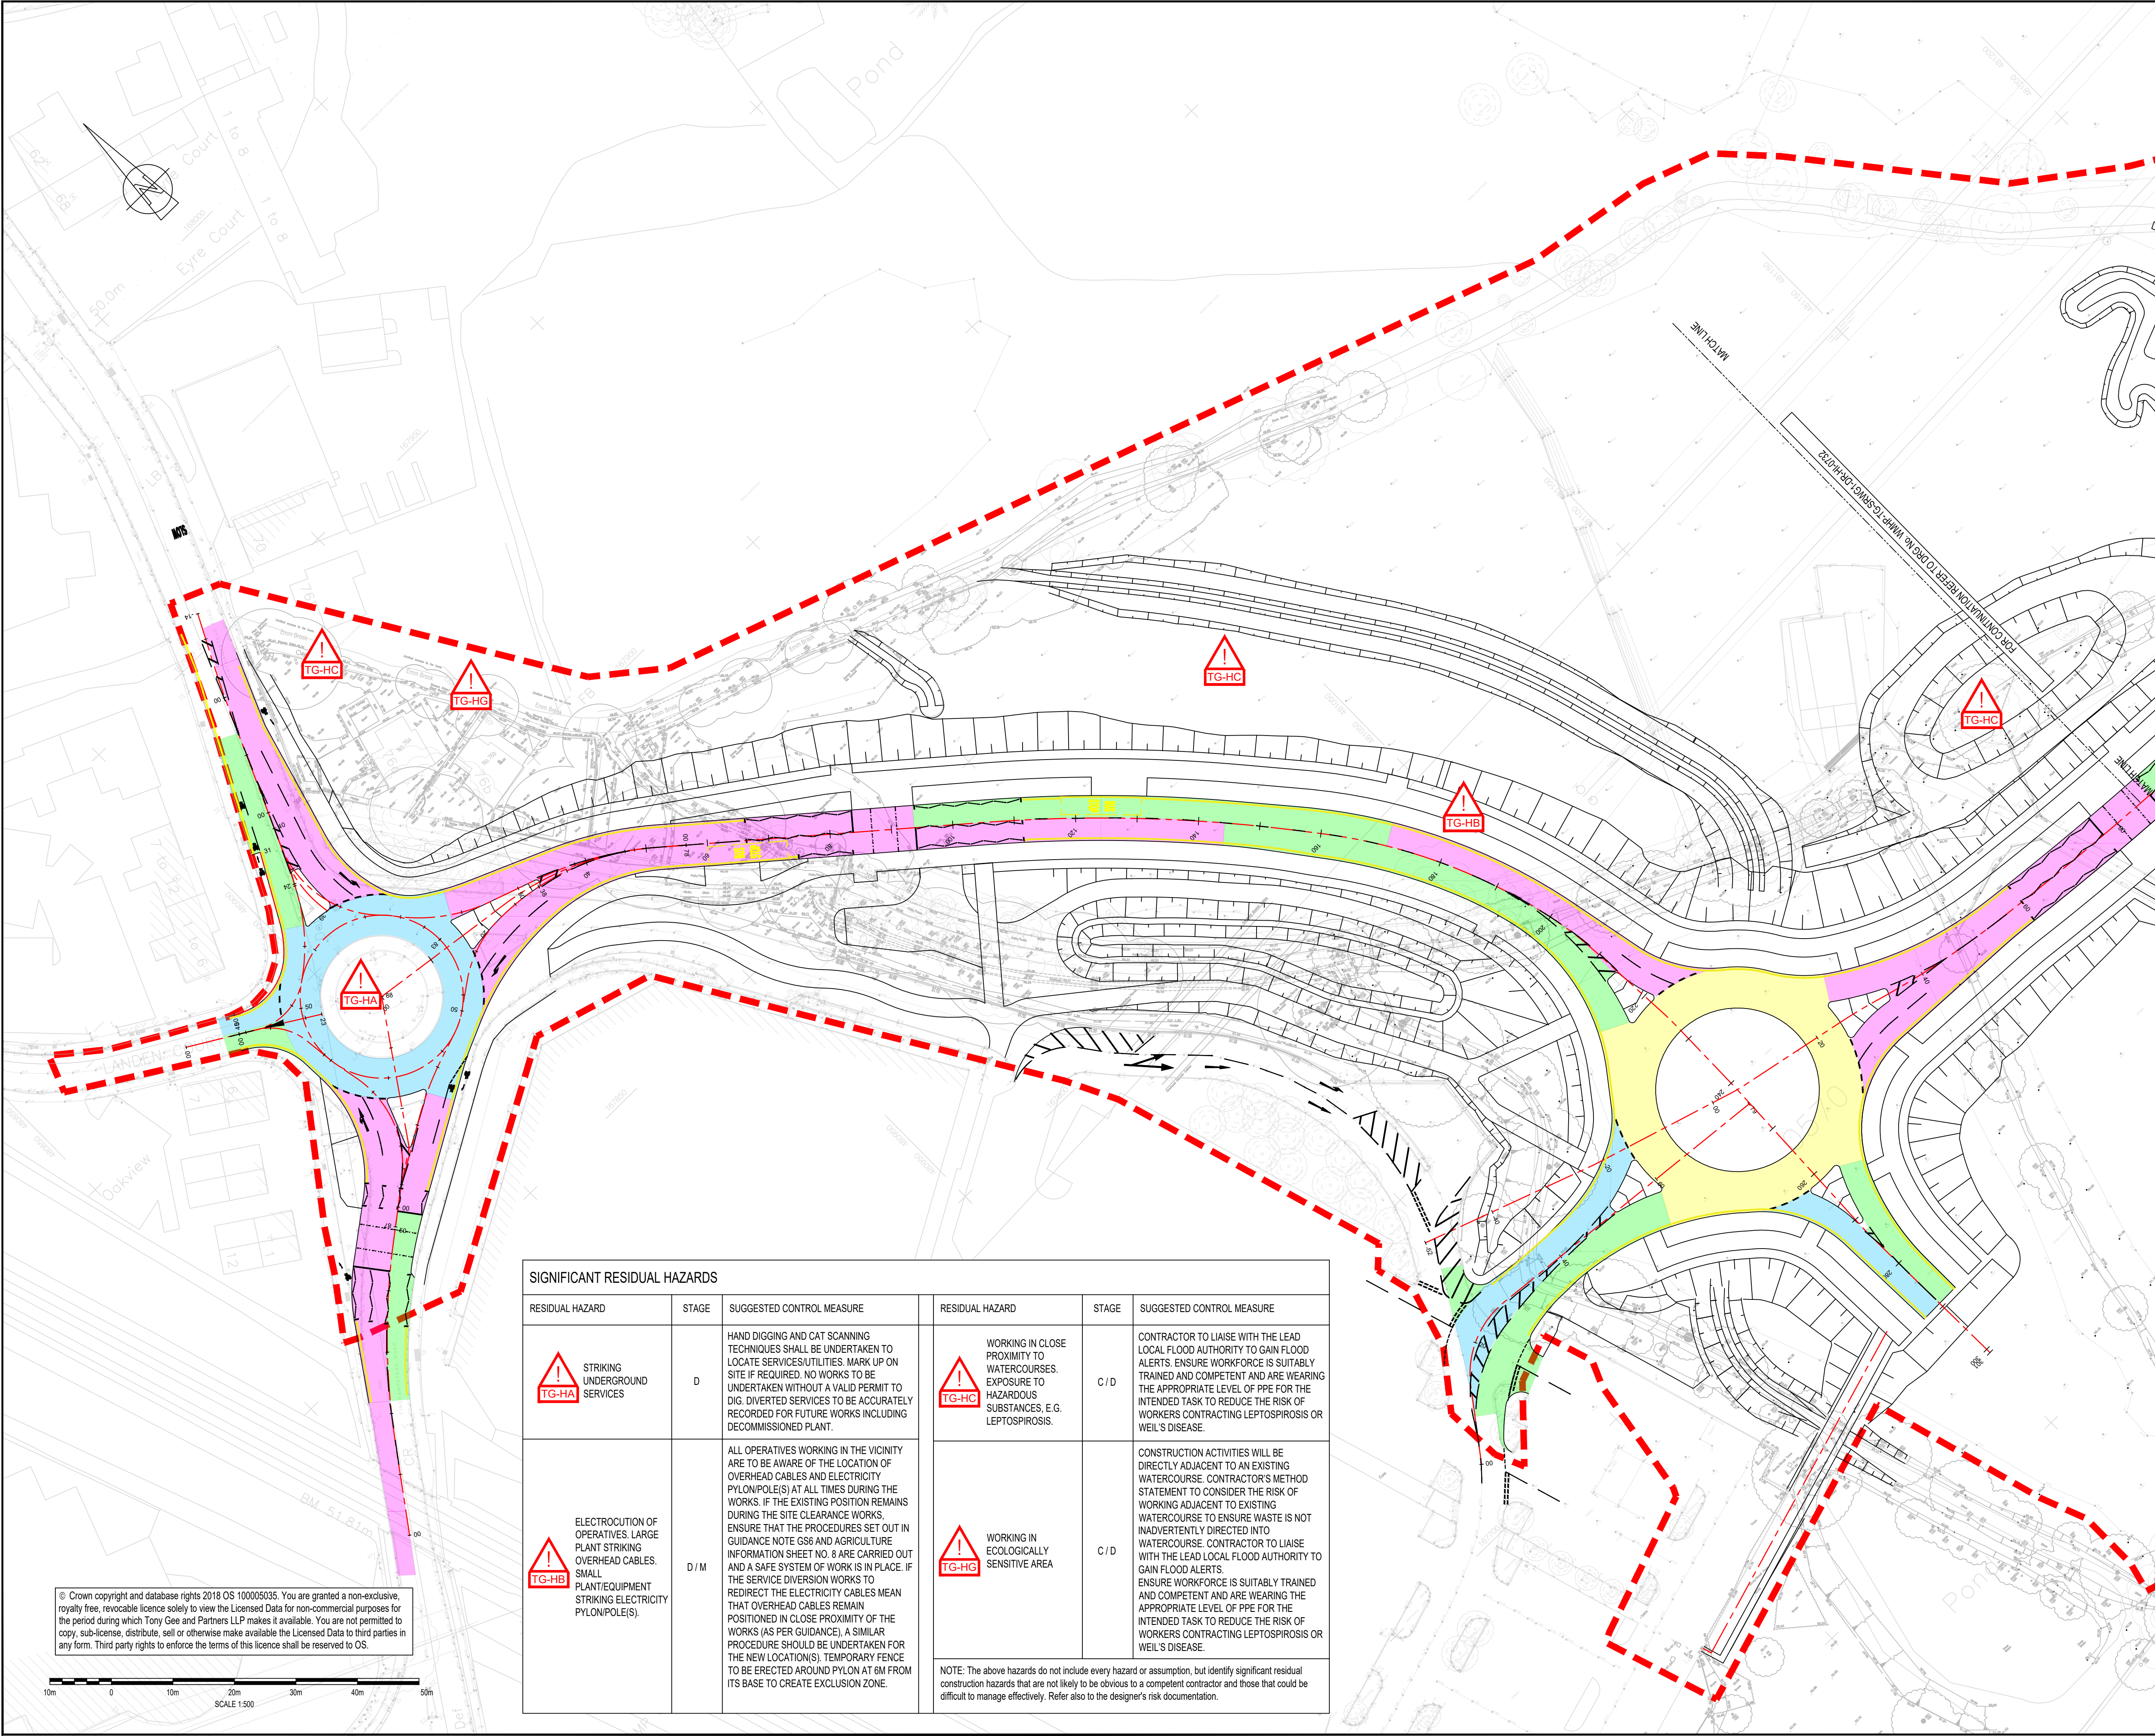

DO NOT SCALE

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.

2. ALL LEVELS ARE IN METRES AOD UNLESS NOTED OTHERWISE.

3. DRAWING TO BE READ IN CONJUNCTION WITH DETAILS DRAWING WMHP-TG-SRWG1-DR-HI-0721 AND SPECIFICATION REF: WMHP-TG-SRWG1-SP-HI-0701.

4. FOR DETAILS OF KERBS AND FOOTWAYS REFER TO DRAWINGS WMHP-TG-SRWG1-DR-HI-1101 TO WMHP-TG-SRWG1-DR-HI-1109.

LEGEND

RED LINE BOUNDARY

MAINTENANCE ACCESS NEW SURFACE COURSE (PSV 50 MIN)

MAINLINE NEW SURFACE COURSE (PSV 53 MIN)

ROUNDAABOUT NEW SURFACE COURSE (PSV 55 MIN)

ROUNDAABOUT / JUNCTION APPROACHES NEW SURFACE COURSE (PSV 60 MIN)

ROUNDAABOUT / JUNCTION APPROACHES NEW SURFACE COURSE (PSV 65 MIN)

JUNCTION NEW SURFACE COURSE (PSV 65 MIN)

JUNCTION NEW SURFACE COURSE (PSV 68+ MIN)

BENDS WITH A RADIUS < 100m NEW SURFACE COURSE (PSV 68+ MIN)

FUEL RESISTANT SURFACING

1 2 3 4 5 6 7 8 9

INSET

SHEET LOCATION PLAN

N.T.S

KEYPLAN:

SWOR - SPINE ROAD AND WESTERN GATEWAY PHASE 1

P08	18/06/2025	NL	UPDATED TO ADDRESS PLANNING COMMENTS	DJF	JC
REV	DATE	BY	DESCRIPTION	CHK	APP

DRAWING STATUS: SUITABLE FOR APPROVAL S5

DESIGNER:

Tony Gee

Consulting Civil, Structural and Geotechnical Engineers

Tony Gee and Partners LLP

Hardy House

140 High Street

Esher, Surrey

KT10 9QJ

Tel: 01372 461600

www.tonygee.com

CLIENT:

WOKINGHAM

BOROUGH COUNCIL

Shute End, Wokingham, Berkshire RG40 1BN

Tel: (0118) 974 6000 Web: www.wokingham.gov.uk

PROJECT:

SPINE ROAD AND WESTERN GATEWAY PHASE 1

TITLE:

HIGHWAYS SURFACING PLAN LAYOUT

SHEET 1

SCALE @ A1: 1:500

CHECKED: DJF

APPROVED: JC

PROJECT NO: C118047

DESIGNED: DJF

DRAWN: TCH

DATE: APRIL 21

DRAWING No: WMHP-TG-SRWG1-DR-HI-0731

REV: P08

SIGNIFICANT RESIDUAL HAZARDS					
RESIDUAL HAZARD	STAGE	SUGGESTED CONTROL MEASURE	RESIDUAL HAZARD	STAGE	SUGGESTED CONTROL MEASURE
STRIKING UNDERGROUND SERVICES	D	HAND DIGGING AND CAT SCANNING TECHNIQUES SHALL BE UNDERTAKEN TO LOCATE SERVICES/UTILITIES. MARK UP ON SITE IF REQUIRED. NO WORKS TO BE UNDERTAKEN WITHOUT A VALID PERMIT TO DIG. DIVERTED SERVICES TO BE ACCURATELY RECORDED FOR FUTURE WORKS INCLUDING DECOMMISSIONED PLANT.	WORKING IN CLOSE PROXIMITY TO WATERCOURSES. EXPOSURE TO HAZARDOUS SUBSTANCES, E.G. LEPTOSPIROSIS.	C/D	CONTRACTOR TO LIAISE WITH THE LEAD LOCAL FLOOD AUTHORITY TO GAIN FLOOD ALERTS. ENSURE WORKFORCE IS SUITABLY TRAINED AND COMPETENT AND ARE WEARING THE APPROPRIATE LEVEL OF PPE FOR THE INTENDED TASK TO REDUCE THE RISK OF WORKERS CONTRACTING LEPTOSPIROSIS OR WEIL'S DISEASE.
ELECTROCUTION OF OPERATIVES. LARGE PLANT STRIKING OVERHEAD CABLES. SMALL PLANT/EQUIPMENT STRIKING ELECTRICITY PYLON/POLE(S).	D / M	ALL OPERATIVES WORKING IN THE VICINITY ARE TO BE AWARE OF THE LOCATION OF OVERHEAD CABLES AND ELECTRICITY PYLON/POLE(S) AT ALL TIMES DURING THE WORKS. IF THE EXISTING POSITION REMAINS DURING THE SITE CLEARANCE WORKS, ENSURE THAT THE PROCEDURES SET OUT IN GUIDANCE NOTE GS6 AND AGRICULTURE INFORMATION SHEET NO. 8 ARE CARRIED OUT AND A SAFE SYSTEM OF WORK IS IN PLACE. IF THE SERVICE DIVERSION WORKS TO REDIRECT THE ELECTRICITY CABLES MEAN THAT OVERHEAD CABLES REMAIN POSITIONED IN CLOSE PROXIMITY OF THE WORKS (AS PER GUIDANCE), A SIMILAR PROCEDURE SHOULD BE UNDERTAKEN FOR THE NEW LOCATION(S). TEMPORARY FENCE TO BE ERRECTED AROUND PYLON AT 6M FROM ITS BASE TO CREATE EXCLUSION ZONE.	WORKING IN ECOLOGICALLY SENSITIVE AREA	C/D	CONSTRUCTION ACTIVITIES WILL BE DIRECTLY ADJACENT TO AN EXISTING WATERCOURSE. CONTRACTOR'S METHOD STATEMENT TO CONSIDER THE RISK OF WORKING ADJACENT TO EXISTING WATERCOURSE TO ENSURE WASTE IS NOT INADVERTENTLY DIRECTED INTO WATERCOURSE. CONTRACTOR TO LIAISE WITH THE LEAD LOCAL FLOOD AUTHORITY TO GAIN FLOOD ALERTS. ENSURE WORKFORCE IS SUITABLY TRAINED AND COMPETENT AND ARE WEARING THE APPROPRIATE LEVEL OF PPE FOR THE INTENDED TASK TO REDUCE THE RISK OF WORKERS CONTRACTING LEPTOSPIROSIS OR WEIL'S DISEASE.
NOTE: The above hazards do not include every hazard or assumption, but identify significant residual construction hazards that are not likely to be obvious to a competent contractor and those that could be difficult to manage effectively. Refer also to the designer's risk documentation.					

File name: IP:\A\DATA\PROJECTS\2018\C118047\BIM\01-WIP\DRAWINGS\WMHP-TG-SRWG1-DR-HI-0731.DWG, printed on: 17 June 2025 12:26:02, by: David Flampdon