



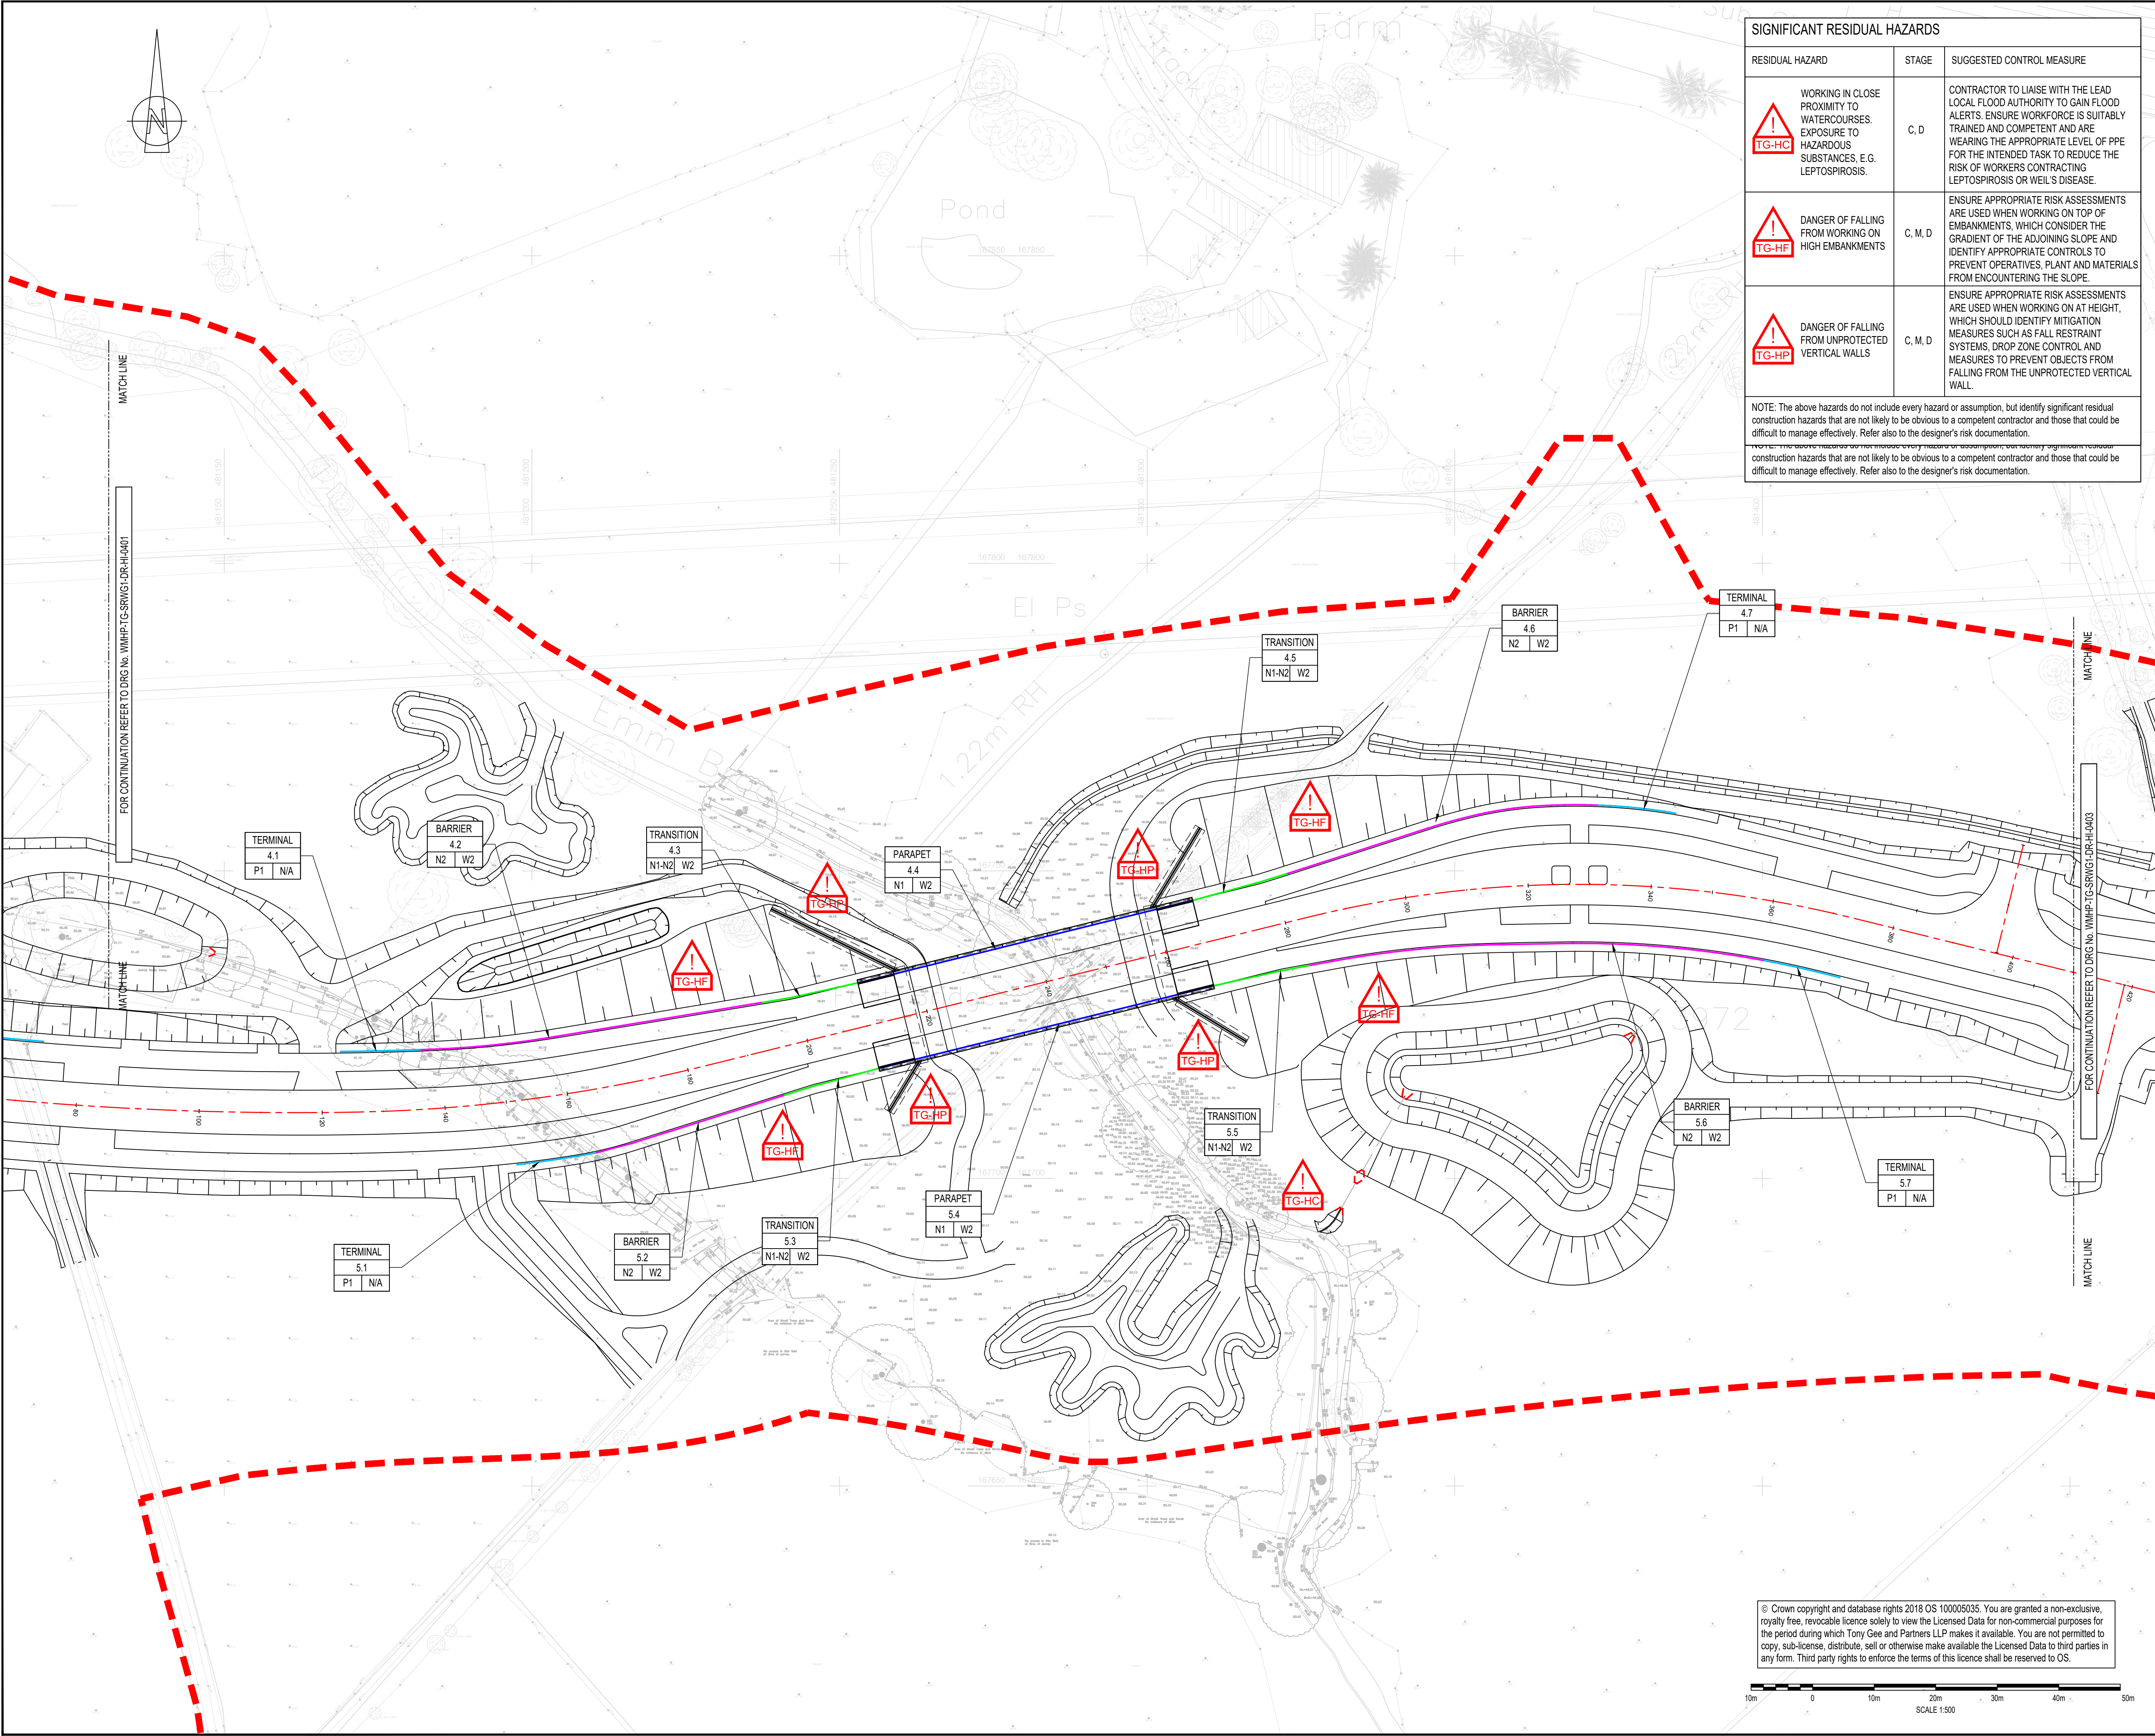


SIGNIFICANT RESIDUAL HAZARDS		
RESIDUAL HAZARD	STAGE	SUGGESTED CONTROL MEASURE
 WORKING IN CLOSE PROXIMITY TO WATERCOURSES. EXPOSURE TO HAZARDOUS SUBSTANCES, E.G. LEPTOSPIROSIS.	C, D	CONTRACTOR TO LIAISE WITH THE LEAD LOCAL FLOOD AUTHORITY TO GAIN FLOOD ALERTS. ENSURE WORKFORCE IS SUITABLY TRAINED AND COMPETENT AND ARE WEARING THE APPROPRIATE LEVEL OF PPE FOR THE INTENDED TASK TO REDUCE THE RISK OF WORKERS CONTRACTING LEPTOSPIROSIS OR WEIL'S DISEASE.
 DANGER OF FALLING FROM WORKING ON HIGH EMBANKMENTS	C, M, D	ENSURE APPROPRIATE RISK ASSESSMENTS ARE USED WHEN WORKING ON TOP OF EMBANKMENTS, WHICH CONSIDER THE GRADIENT OF THE ADJOINING SLOPE AND IDENTIFY APPROPRIATE CONTROLS TO PREVENT OPERATIVES, PLANT AND MATERIALS FROM ENCOUNTERING THE SLOPE.
 DANGER OF FALLING FROM UNPROTECTED VERTICAL WALLS	C, M, D	ENSURE APPROPRIATE RISK ASSESSMENTS ARE USED WHEN WORKING ON AT HEIGHT, WHICH SHOULD IDENTIFY MITIGATION MEASURES SUCH AS FALL RESTRAINT SYSTEMS, DROP ZONE CONTROL AND MEASURES TO PREVENT OBJECTS FROM FALLING FROM THE UNPROTECTED VERTICAL WALL.
NOTE: The above hazards do not include every hazard or assumption, but identify significant residual construction hazards that are not likely to be obvious to a competent contractor and those that could be difficult to manage effectively. Refer also to the designer's risk documentation.		

DO NOT SCALE

NOTES:
1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.
2. ALL LEVELS ARE IN METRES AOD UNLESS NOTED OTHERWISE.
3. DRAWING TO BE READ IN CONJUNCTION WITH SPECIFICATION REFERENCE WMHP-TG-SRWG1-SP-HI-0401 AND ROAD RESTRAINT DETAILS DRAWING WMHP-TG-SRWG1-DR-HI-0421.

LEGEND
--- PLANNING APPLICATION 192928 RED LINE BOUNDARY
--- N2 PARAPET - SAFETY BARRIER TRANSITION
--- N1 PARAPET
--- SAFETY BARRIER
--- TERMINAL
--- OFF STRUCTURE PEDESTRIAN GUARDRAIL
--- INDICATIVE LOCATION OF ON STRUCTURE PEDESTRIAN PARAPET (SEE RELEVANT STRUCTURES DRAWINGS)
--- INDICATIVE LOCATION OF ON STRUCTURE PEDESTRIAN GUARDRAIL (SEE RELEVANT STRUCTURES DRAWINGS)

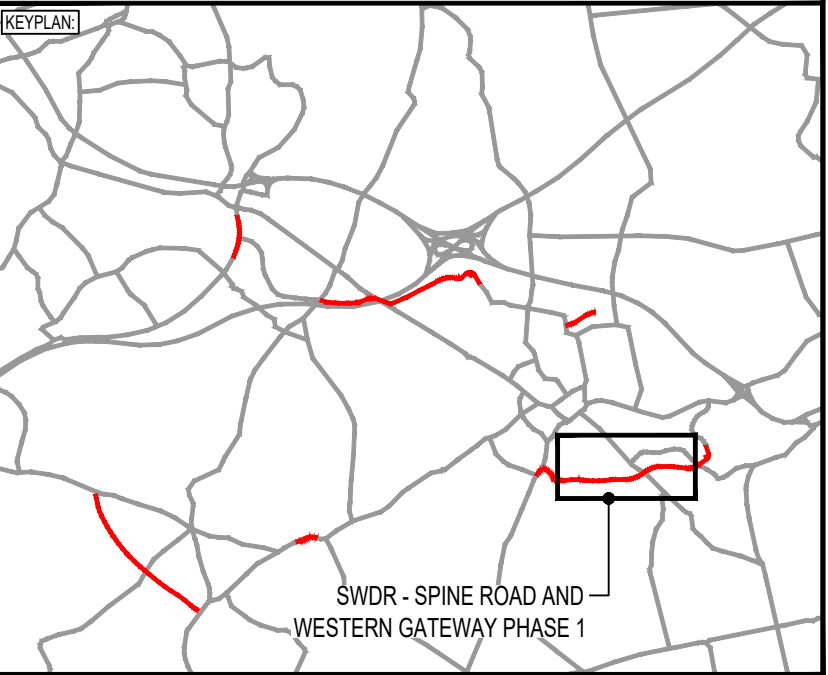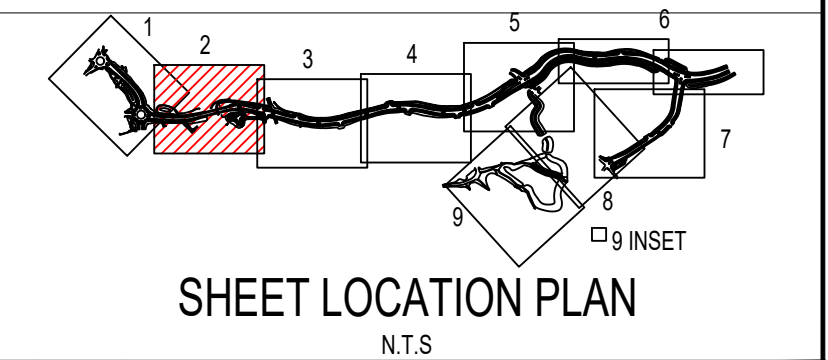

P06	18/06/2025	GR	UPDATED FOR PLANNING CONDITION DISCHARGE	DJF	JC
REV	DATE	BY	DESCRIPTION	CHK	APP
DRAWING STATUS:					S5
SUITABLE FOR APPROVAL					
DESIGNER:					Tony Gee and Partners LLP Hardy House 140 High Street Esher, Surrey KT10 9QJ Tel: 01372 461600 www.tonygee.com Consulting Civil, Structural and Geotechnical Engineers
CONTRACTOR:					

CLIENT:

**WOKINGHAM**
BOROUGH COUNCIL
Shute End, Wokingham, Berkshire RG40 1BN
Tel: (0118) 974 6000 Web: www.wokingham.gov.uk

PROJECT:

WOKINGHAM MAJOR HIGHWAYS PROGRAMME
SPINE ROAD AND WESTERN GATEWAY PHASE 1

TITLE:

HIGHWAYS
ROAD RESTRAINTS
PLAN LAYOUT

SHEET 2

SCALE @ A1: 1:500

CHECKED: BH

APPROVED: JC

PROJECT NO: C118047

DESIGNED: MH

DRAWN: MH

DATE: March 21

DRAWING No:

WMHP-TG-SRWG1-DR-HI-0402

REV: P06

© Crown copyright and database rights 2018 OS 100005035. You are granted a non-exclusive, royalty free, revocable licence solely to view the Licensed Data for non-commercial purposes for the period during which Tony Gee and Partners LLP makes it available. You are not permitted to copy, sub-license, distribute, sell or otherwise make available the Licensed Data to third parties in any form. Third party rights to enforce the terms of this licence shall be reserved to OS.

10m 0 10m 20m 30m 40m 50m
SCALE 1:500