


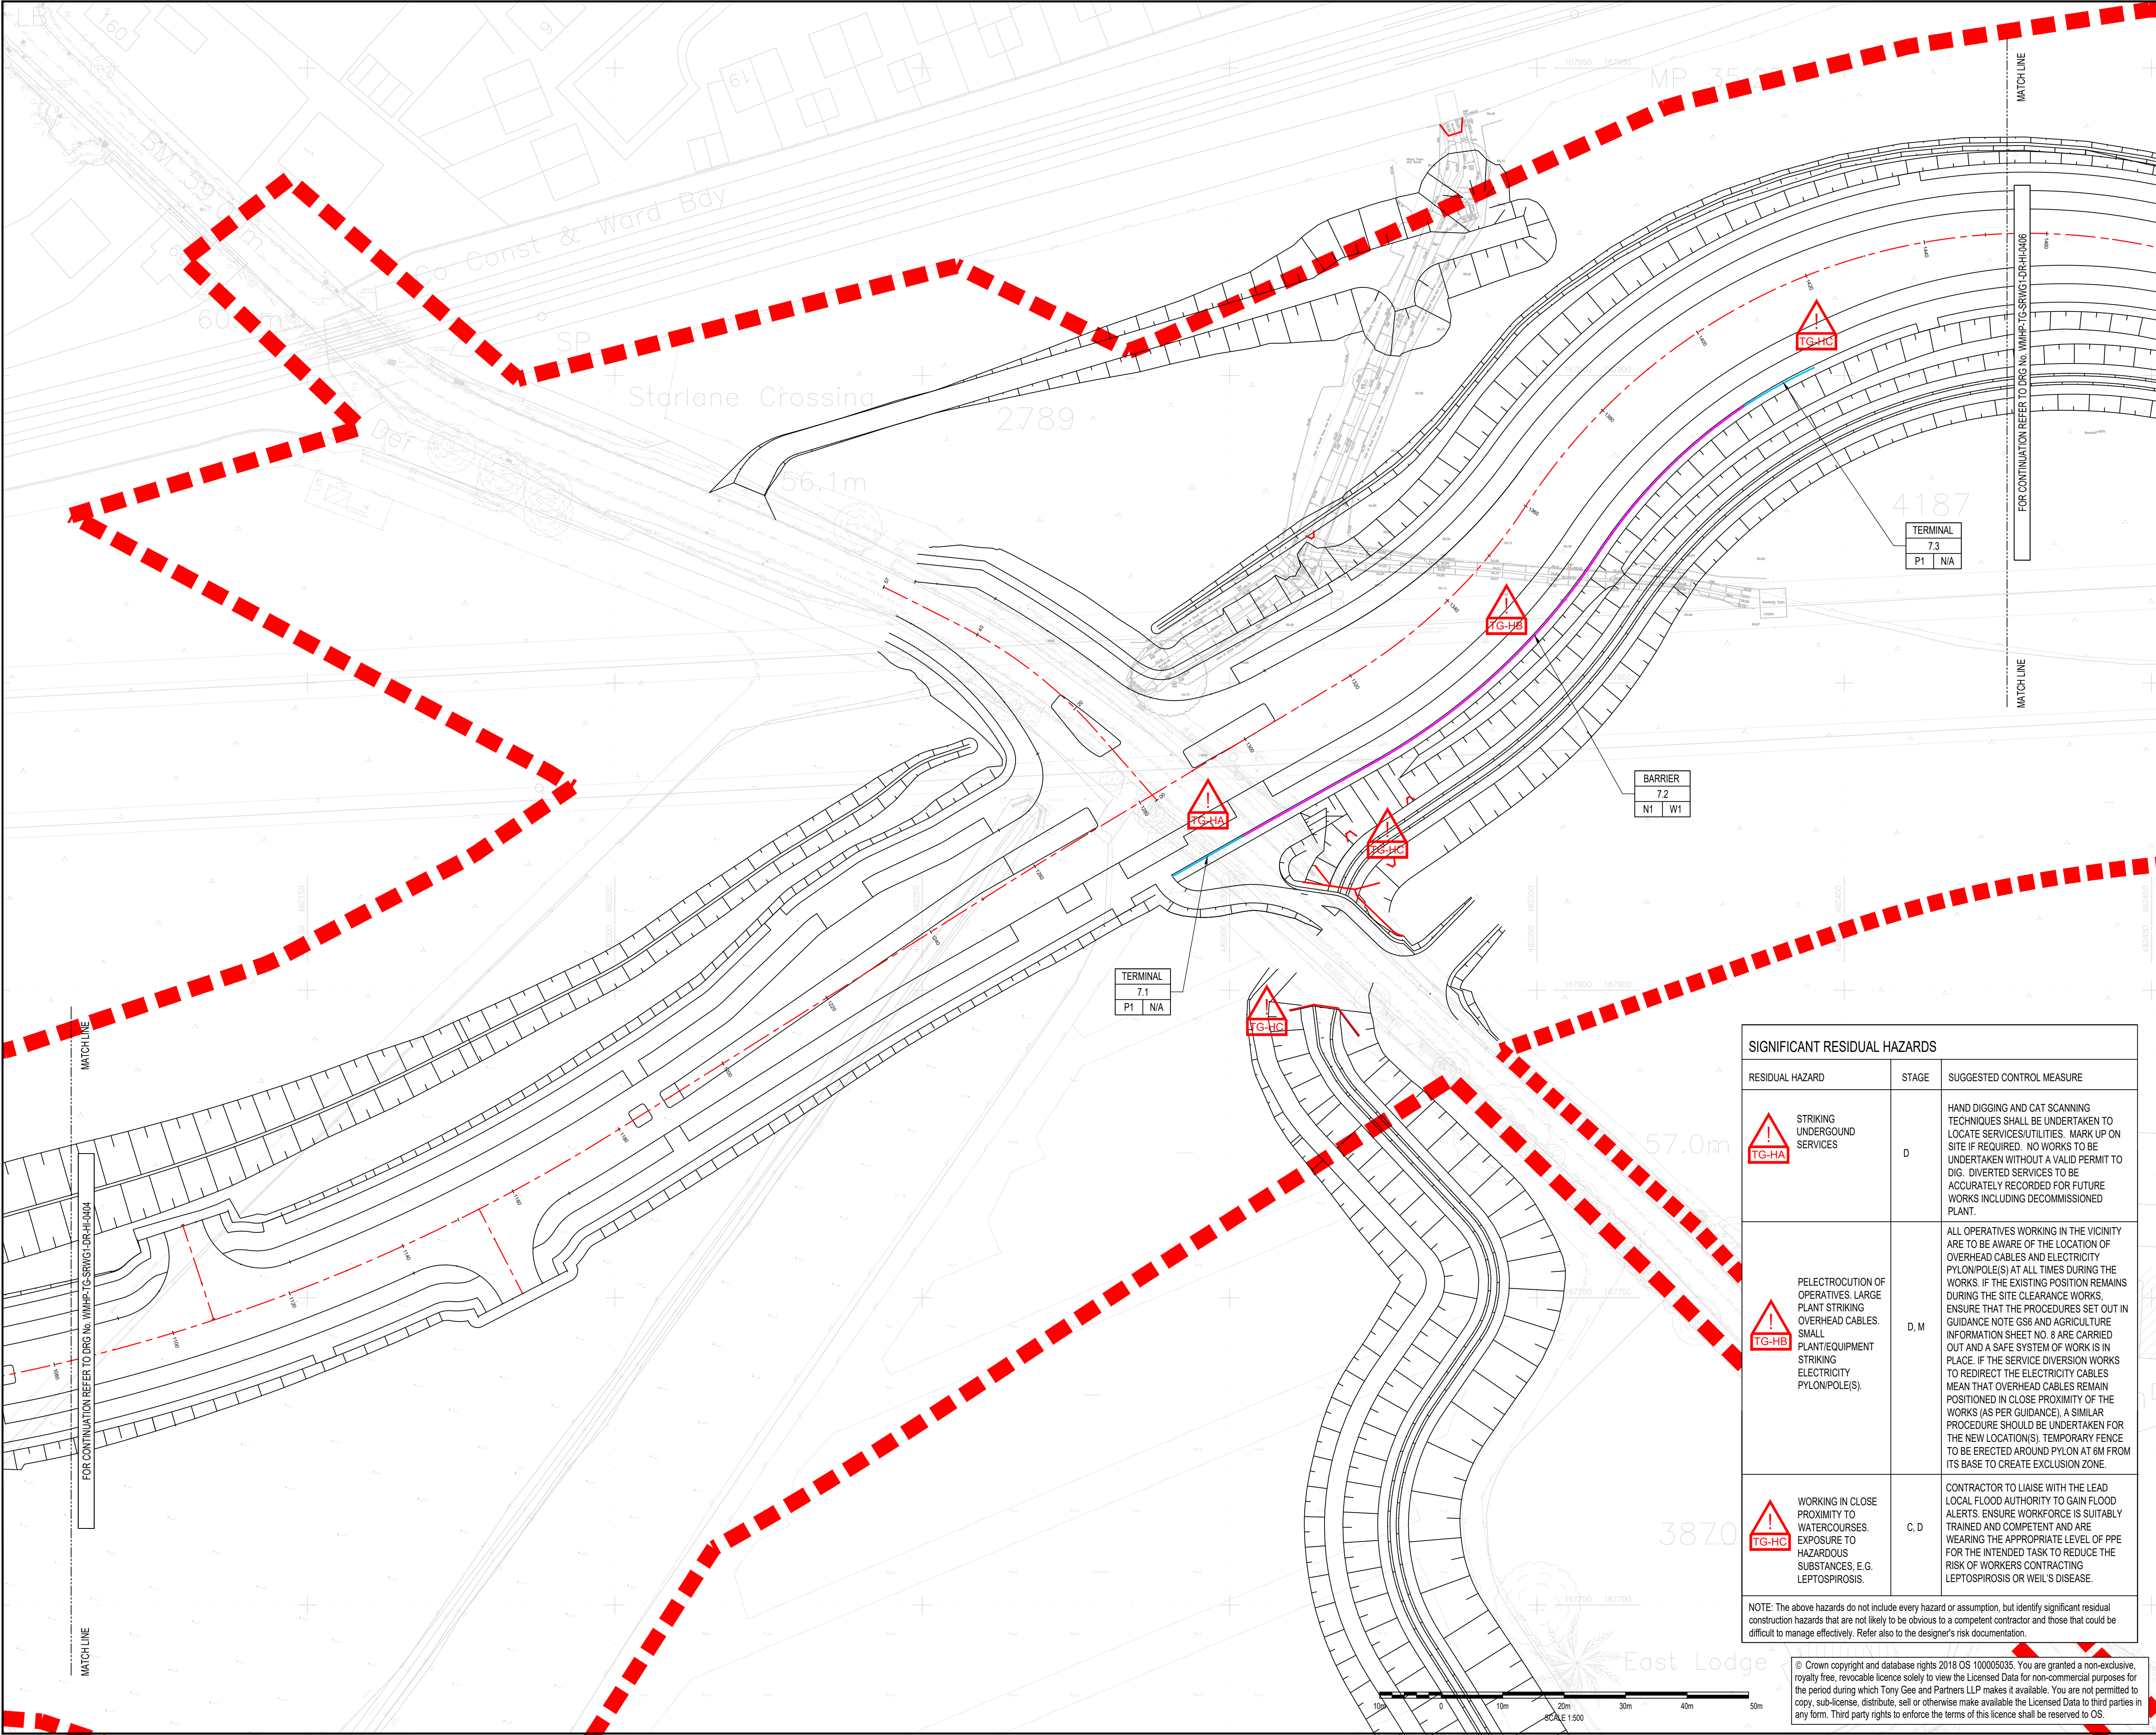

DO NOT SCALE

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.

2. ALL LEVELS ARE IN METRES AOD UNLESS NOTED OTHERWISE.

3. DRAWING TO BE READ IN CONJUNCTION WITH SPECIFICATION REFERENCE WMHP-TG-SRWG1-SP-HI-0401 AND ROAD RESTRAINT DETAILS DRAWING WMHP-TG-SRWG1-DR-HI-0421.

LEGEND

PLANNING APPLICATION 192928 RED LINE BOUNDARY

N2 PARAPET - SAFETY BARRIER TRANSITION

N1 PARAPET

SAFETY BARRIER

TERMINAL

OFF STRUCTURE PEDESTRIAN GUARDRAIL

INDICATIVE LOCATION OF ON STRUCTURE PEDESTRIAN PARAPET (SEE RELEVANT STRUCTURES DRAWINGS)

INDICATIVE LOCATION OF ON STRUCTURE PEDESTRIAN GUARDRAIL (SEE RELEVANT STRUCTURES DRAWINGS)

1

2

3

4

5

6

7

8

9

INSET

SHEET LOCATION PLAN

N.T.S.

KEYPLAN

SWDR - SPINE ROAD AND WESTERN GATEWAY PHASE 1

PO3	29/09/2021	BH	REVISED FOR SCO COMMENTS	JC	ARL
PO2	20/08/2021	JF	REVISED FOR PLANNING DISCHARGE AND SCO COMMENTS	BH	JC
PO1	12/05/2021	MH	DETAILED DESIGN ISSUE	BH	JC
REV	DATE	BY	DESCRIPTION	CHK	APP

DRAWING STATUS:

SUITABLE FOR REVIEW & COMMENT

S3

DESIGNER:

Tony Gee

Consulting Civil, Structural and Geotechnical Engineers

CONTRACTOR:

Balfour Beatty

CLIENT:

WOKINGHAM BOROUGH COUNCIL

PROJECT:

WOKINGHAM MAJOR HIGHWAYS PROGRAMME

SPINE ROAD AND WESTERN GATEWAY PHASE 1

TITLE:

HIGHWAYS

ROAD RESTRAINTS

PLAN LAYOUT

SHEET 5

SCALE @ A1:

1:500

CHECKED:

BH

APPROVED:

JC

PROJECT NO:

C118047

DESIGNED:

MH

DRAWN:

MH

DATE:

March 21

DRAWING NO:

WMHP-TG-SRWG1-DR-HI-0405

REV:

P03

RESIDUAL HAZARD

STAGE

SUGGESTED CONTROL MEASURE

STRIKING UNDERGROUND SERVICES

D

HAND DIGGING AND CAT SCANNING TECHNIQUES SHALL BE UNDERTAKEN TO LOCATE SERVICES/UTILITIES. MARK UP ON SITE IF REQUIRED. NO WORKS TO BE UNDERTAKEN WITHOUT A VALID PERMIT TO DIG. DIVERTED SERVICES TO BE ACCURATELY RECORDED FOR FUTURE WORKS INCLUDING DECOMMISSIONED PLANT.

PELECTROCUTION OF OPERATIVES. LARGE PLANT STRIKING OVERHEAD CABLES. SMALL PLANT/EQUIPMENT STRIKING ELECTRICITY PYLON/POLE(S).

D, M

ALL OPERATIVES WORKING IN THE VICINITY ARE TO BE AWARE OF THE LOCATION OF OVERHEAD CABLES AND ELECTRICITY PYLON/POLE(S) AT ALL TIMES DURING THE WORKS. IF THE EXISTING POSITION REMAINS DURING THE SITE CLEARANCE WORKS, ENSURE THAT THE PROCEDURES SET OUT IN GUIDANCE NOTE GS6 AND AGRICULTURE INFORMATION SHEET NO. 8 ARE CARRIED OUT AND A SAFE SYSTEM OF WORK IS IN PLACE. IF THE SERVICE DIVERSION WORKS TO REDIRECT THE ELECTRICITY CABLES MEAN THAT OVERHEAD CABLES REMAIN POSITIONED IN CLOSE PROXIMITY OF THE WORKS (AS PER GUIDANCE). A SIMILAR PROCEDURE SHOULD BE UNDERTAKEN FOR THE NEW LOCATION(S). TEMPORARY FENCE TO BE ERRECTED AROUND PYLON AT 6M FROM ITS BASE TO CREATE EXCLUSION ZONE.

WORKING IN CLOSE PROXIMITY TO WATERCOURSES. EXPOSURE TO HAZARDOUS SUBSTANCES, E.G. LEPTOSPIROSIS.

C, D

CONTRACTOR TO LIAISE WITH THE LEAD LOCAL FLOOD AUTHORITY TO GAIN FLOOD ALERTS. ENSURE WORKFORCE IS SUITABLY TRAINED AND COMPETENT AND ARE WEARING THE APPROPRIATE LEVEL OF PPE FOR THE INTENDED TASK TO REDUCE THE RISK OF WORKERS CONTRACTING LEPTOSPIROSIS OR WEIL'S DISEASE.

NOTE: The above hazards do not include every hazard or assumption, but identify significant residual construction hazards that are not likely to be obvious to a competent contractor and those that could be difficult to manage effectively. Refer also to the designer's risk documentation.

© Crown copyright and database rights 2018 OS 100005035. You are granted a non-exclusive, royalty free, revocable licence solely to view the Licensed Data for non-commercial purposes for the period during which Tony Gee and Partners LLP makes it available. You are not permitted to copy, sub-license, distribute, sell or otherwise make available the Licensed Data to third parties in any form. Third party rights to enforce the terms of this licence shall be reserved to OS.