


File name: S:\PROJECTS\2018\18047\BIM\01\WIP\DRAWINGS\WMHP-TG-SRWG1-DR-HI-0406.DWG, printed on 30 September 2021, 20:55:18, by Ben Hawkins

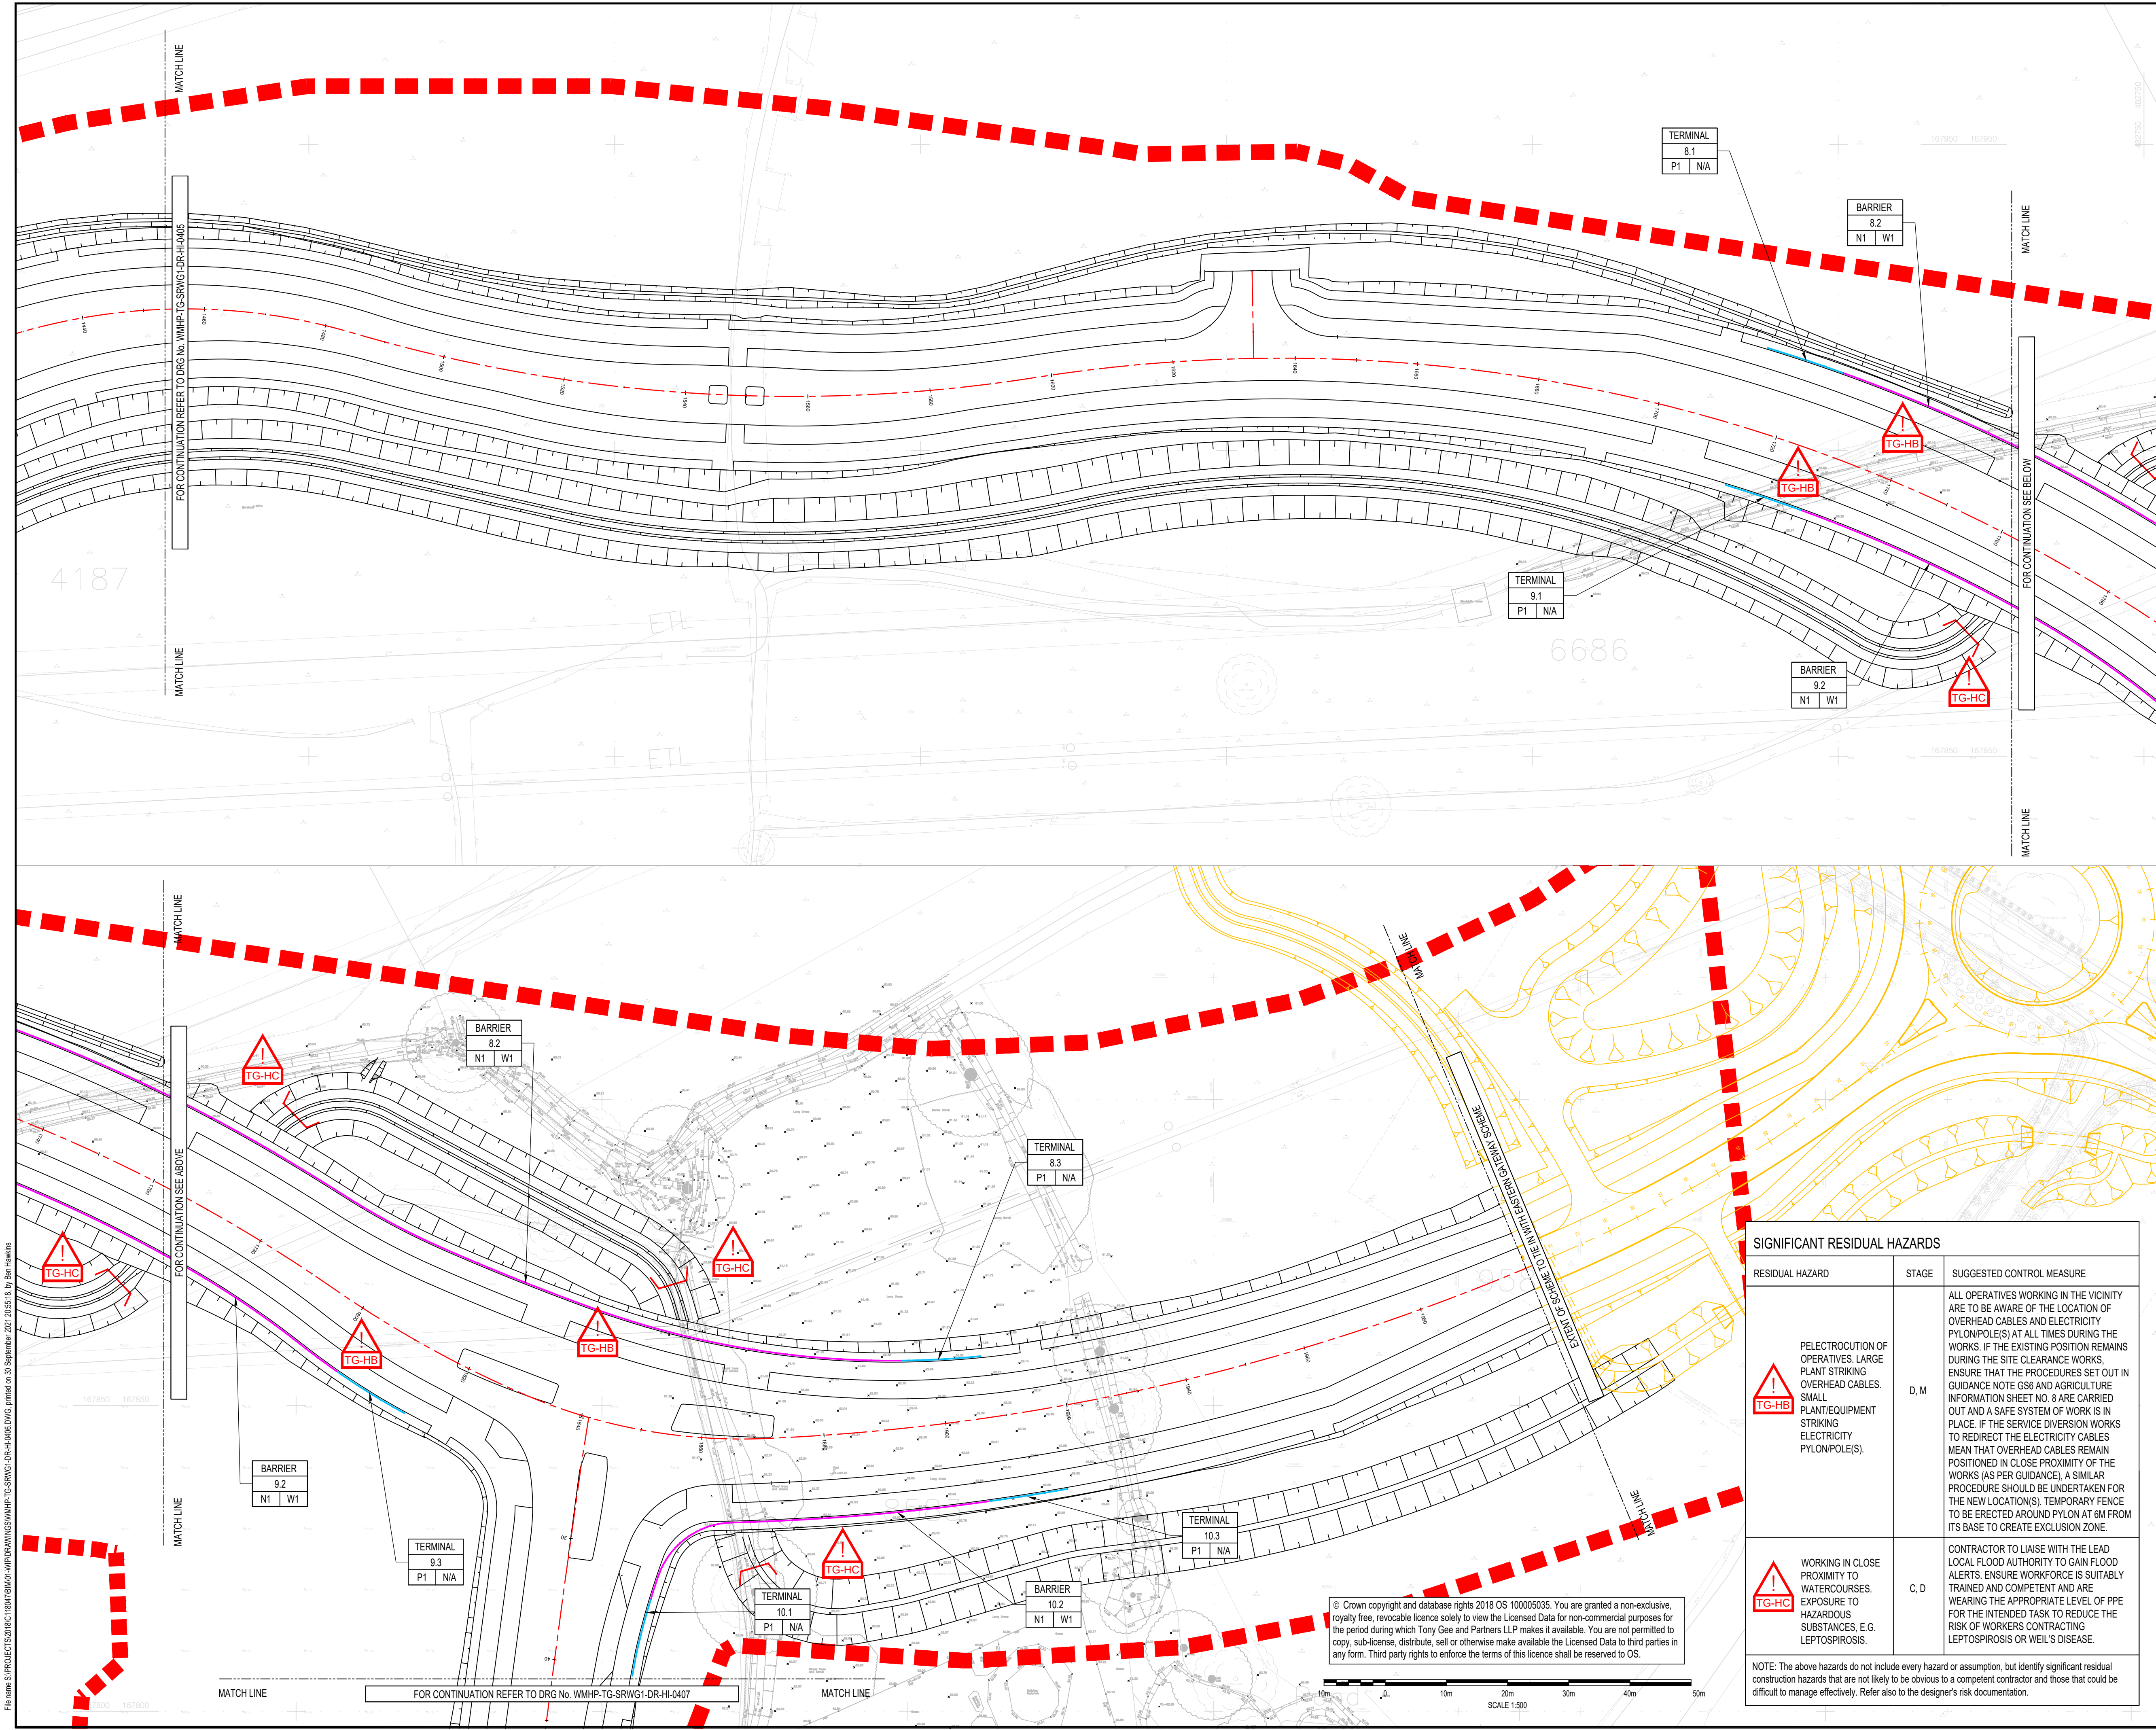

DO NOT SCALE

NOTES:
1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.
2. ALL LEVELS ARE IN METRES AOD UNLESS NOTED OTHERWISE.
3. DRAWING TO BE READ IN CONJUNCTION WITH SPECIFICATION REFERENCE WMHP-TG-SRWG1-SP-HI-0401 AND ROAD RESTRAINT DETAILS DRAWING WMHP-TG-SRWG1-DR-HI-0421.

LEGEND
--- PLANNING APPLICATION 192928 RED LINE BOUNDARY
--- N2 PARAPET - SAFETY BARRIER TRANSITION
--- N1 PARAPET
--- SAFETY BARRIER
--- TERMINAL
--- OFF STRUCTURE PEDESTRIAN GUARDRAIL
--- INDICATIVE LOCATION OF ON STRUCTURE PEDESTRIAN PARAPET (SEE RELEVANT STRUCTURES DRAWINGS)
--- INDICATIVE LOCATION OF ON STRUCTURE PEDESTRIAN GUARDRAIL (SEE RELEVANT STRUCTURES DRAWINGS)

SHEET LOCATION PLAN
N.T.S.

KEYPLAN

P03	28/09/2021	BH	REVISED FOR SCO COMMENTS	JC	ARL
P02	20/08/2021	JF	REVISED FOR PLANNING DISCHARGE AND SCO COMMENTS	BH	JC
P01	12/05/2021	MH	DETAILED DESIGN ISSUE	BH	JC
REV	DATE	BY	DESCRIPTION	CHK	APP

DRAWING STATUS:
SUITABLE FOR REVIEW & COMMENT
S3

DESIGNER:

Tony Gee
Consulting Civil, Structural and Geotechnical Engineers

Tony Gee and Partners LLP
Hardy House
140 High Street
Esher, Surrey
KT10 9QJ
Tel: 01372 461600
www.tonygee.com

CONTRACTOR:
Balfour Beatty

CLIENT:

WOKINGHAM BOROUGH COUNCIL
Shute End, Wokingham, Berkshire RG40 1BN
Tel: (0118) 974 6000 Web: www.wokingham.gov.uk

PROJECT:
WOKINGHAM MAJOR HIGHWAYS PROGRAMME
SPINE ROAD AND WESTERN GATEWAY PHASE 1

TITLE:
HIGHWAYS
ROAD RESTRAINTS
PLAN LAYOUT
SHEET 6

SCALE @ A1: 1:500	CHECKED: BH	APPROVED: JC
PROJECT NO: C118047	DESIGNED: MH	DRAWN: MH
DRAWING No: WMHP-TG-SRWG1-DR-HI-0406	DATE: March 21	REV: P03

© Crown copyright and database rights 2018 OS 100005035. You are granted a non-exclusive, royalty free, revocable licence solely to view the Licensed Data for non-commercial purposes for the period during which Tony Gee and Partners LLP makes it available. You are not permitted to copy, sub-license, distribute, sell or otherwise make available the Licensed Data to third parties in any form. Third party rights to enforce the terms of this licence shall be reserved to OS.

SIGNIFICANT RESIDUAL HAZARDS		
RESIDUAL HAZARD	STAGE	SUGGESTED CONTROL MEASURE
 PELECTROCUTION OF OPERATIVES, LARGE PLANT STRIKING OVERHEAD CABLES, SMALL PLANT/EQUIPMENT STRIKING ELECTRICITY PYLONPOLE(S).	D, M	ALL OPERATIVES WORKING IN THE VICINITY ARE TO BE AWARE OF THE LOCATION OF OVERHEAD CABLES AND ELECTRICITY PYLONPOLE(S) AT ALL TIMES DURING THE WORKS. IF THE EXISTING POSITION REMAINS DURING THE SITE CLEARANCE WORKS, ENSURE THAT THE PROCEDURES SET OUT IN GUIDANCE NOTE GS6 AND AGRICULTURE INFORMATION SHEET NO. 8 ARE CARRIED OUT AND A SAFE SYSTEM OF WORK IS IN PLACE. IF THE SERVICE DIVERSION WORKS TO REDIRECT THE ELECTRICITY CABLES MEAN THAT OVERHEAD CABLES REMAIN POSITIONED IN CLOSE PROXIMITY OF THE WORKS (AS PER GUIDANCE), A SIMILAR PROCEDURE SHOULD BE UNDERTAKEN FOR THE NEW LOCATION(S). TEMPORARY FENCE TO BE ERRECTED AROUND PYLON AT 6M FROM ITS BASE TO CREATE EXCLUSION ZONE.
 WORKING IN CLOSE PROXIMITY TO WATERCOURSES. EXPOSURE TO HAZARDOUS SUBSTANCES, E.G. LEPTOSPIROSIS.	C, D	CONTRACTOR TO LIAISE WITH THE LEAD LOCAL FLOOD AUTHORITY TO GAIN FLOOD ALERTS. ENSURE WORKFORCE IS SUITABLY TRAINED AND COMPETENT AND ARE WEARING THE APPROPRIATE LEVEL OF PPE FOR THE INTENDED TASK TO REDUCE THE RISK OF WORKERS CONTRACTING LEPTOSPIROSIS OR WELL'S DISEASE.
NOTE: The above hazards do not include every hazard or assumption, but identify significant residual construction hazards that are not likely to be obvious to a competent contractor and those that could be difficult to manage effectively. Refer also to the designer's risk documentation.		