


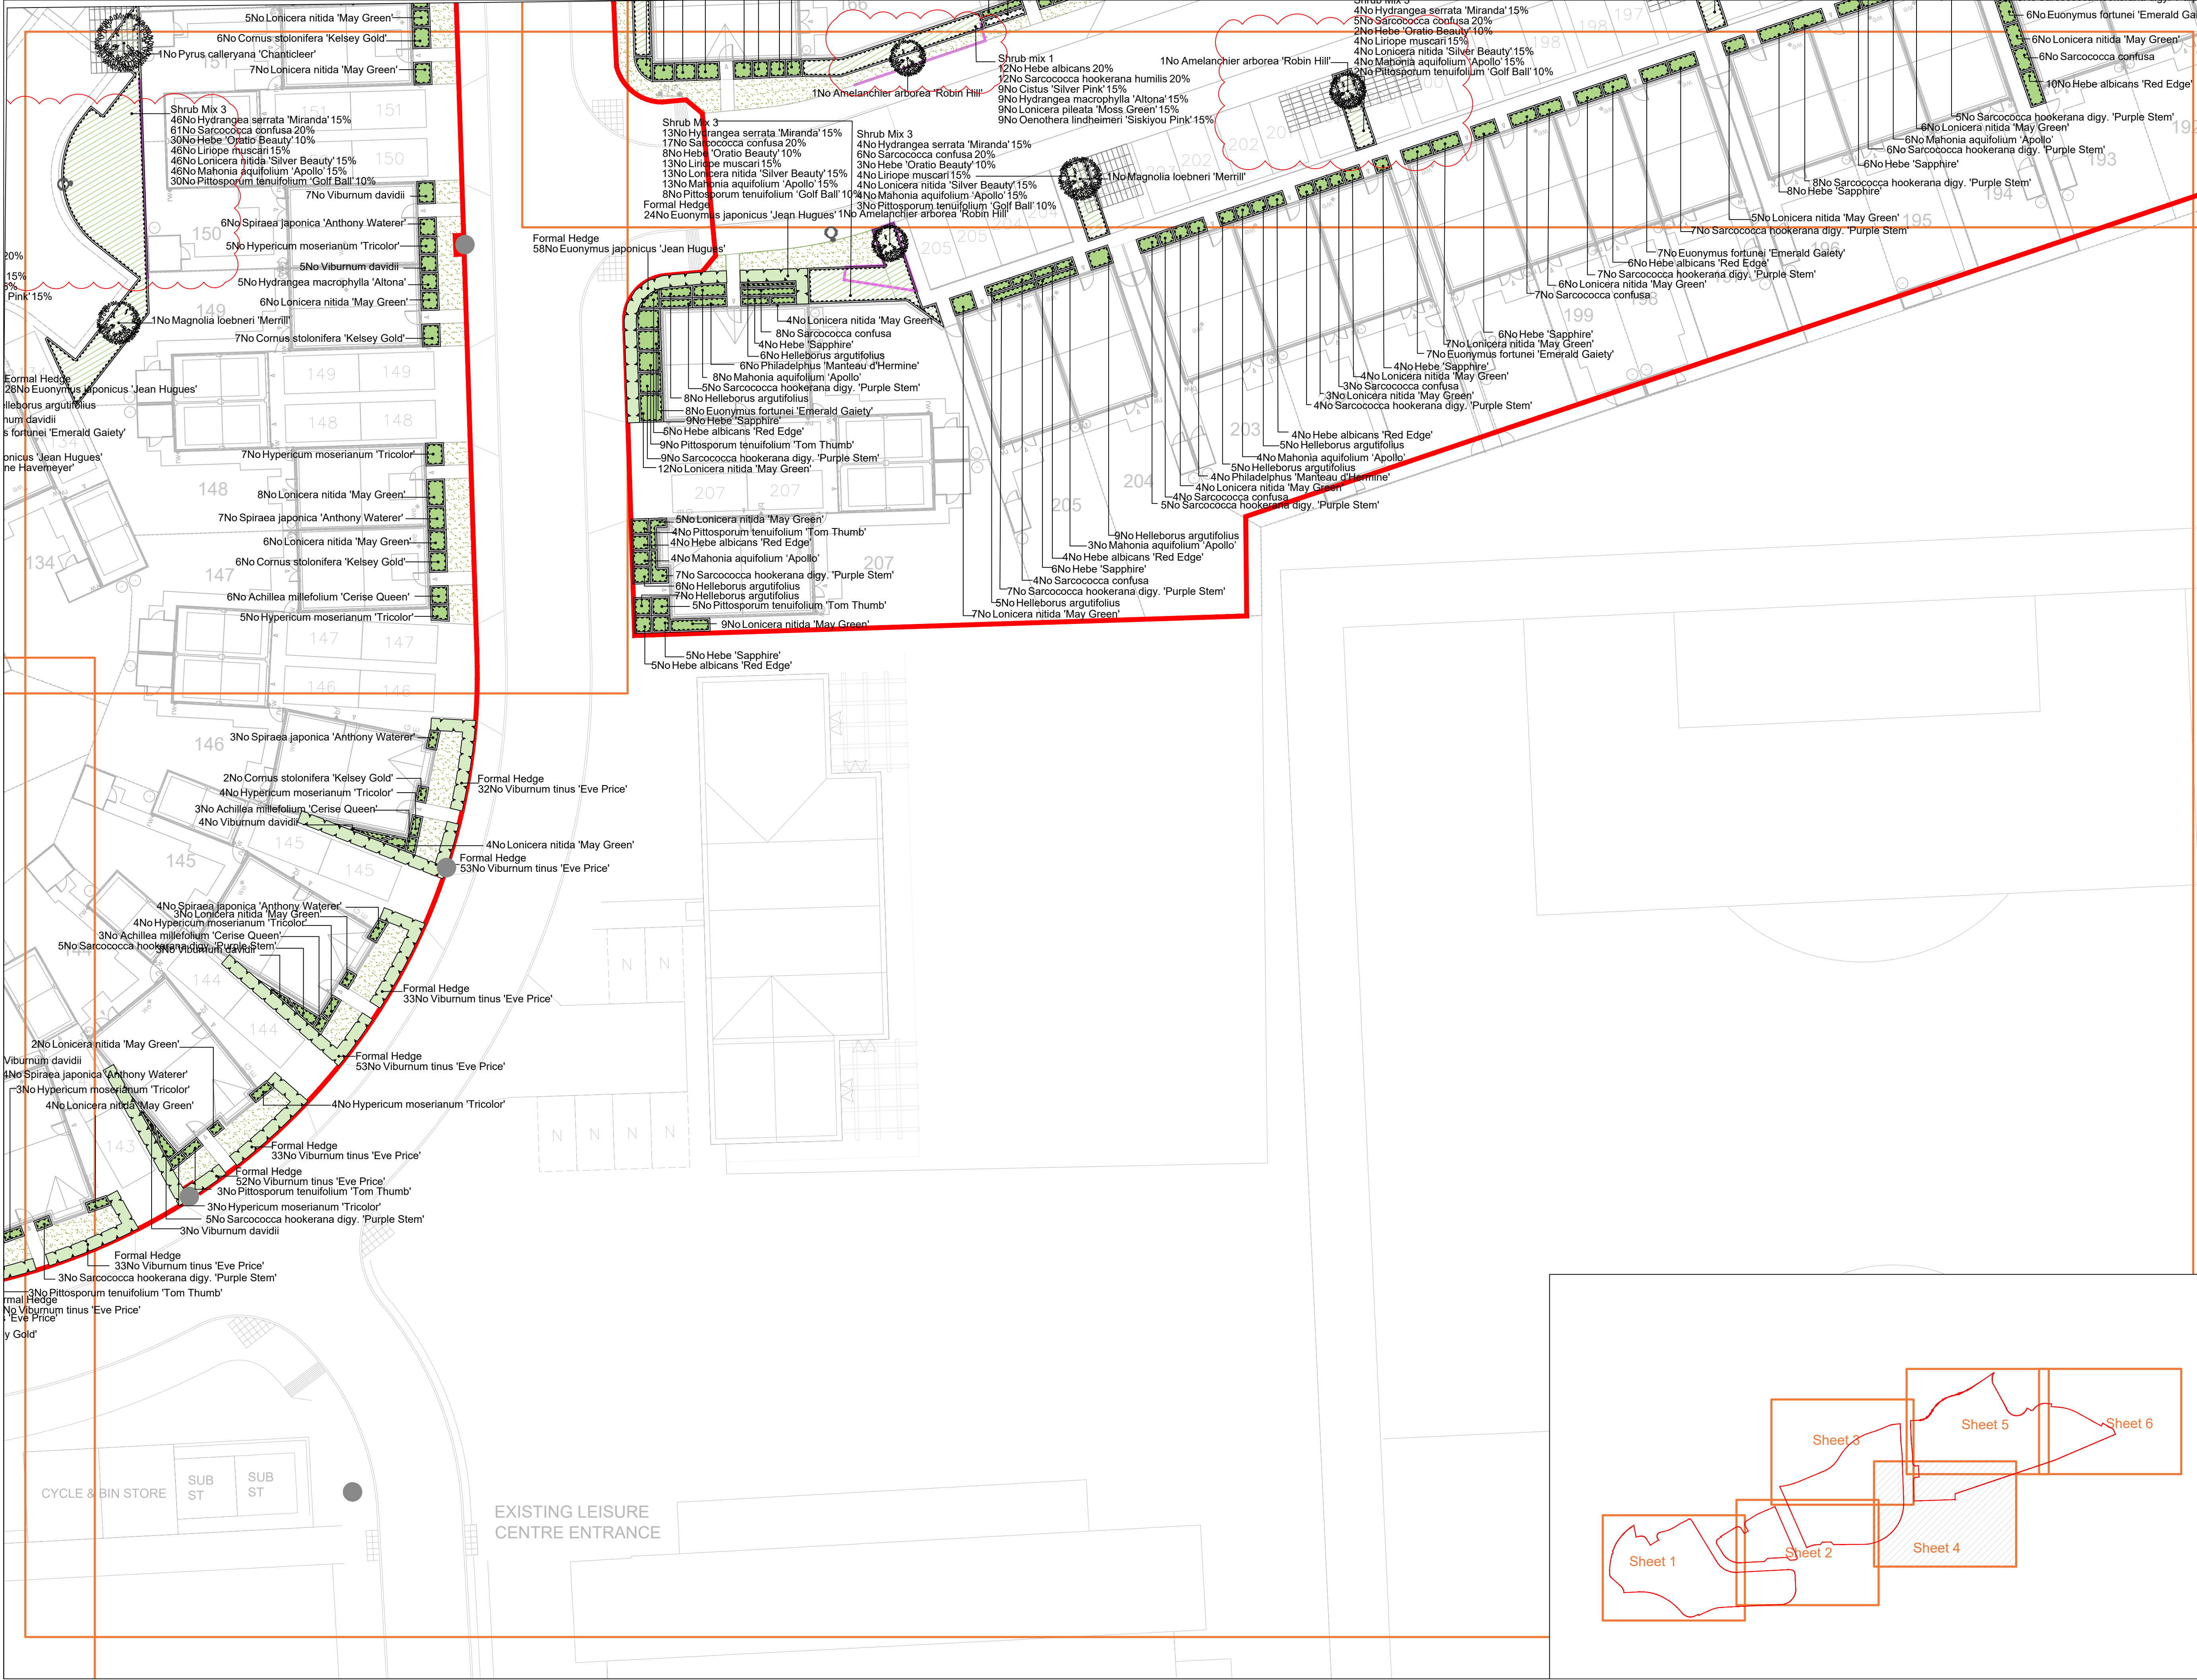

SPECIFICATION
All works generally, to comply with the written Soft Landscape Specification.

NOTES:
DO NOT SCALE FROM DRAWING
NOT FOR CONSTRUCTION, FOR PLANNING PURPOSES ONLY

Legend

- Existing trees to be retained and protected during construction
- Proposed tree planting within verges of soft landscape with cell root system, as provided by Polypipe T-PRE-PR109183-KT-D2-Rev E
- Proposed tree planting within soft landscape. See tree pit detail on sheet 2
- Proposed specimen shrub planting to receive short angular staking on half standards with expandable tree ties.
- Proposed *Viburnum* and *Euonymus* hedge planting to be planted in a double staggered row 300mm apart and at 400mm centres in each row. To be maintained at 1m height.
- Proposed mixed native hedge planting to be planted in a double staggered row 300mm apart and at 400mm centres in each row. To be maintained at 1m height and 1.8m height adjacent to site boundaries
- Proposed shrub planting to receive 75mm bark mulch after planting operations
- Proposed decorative mix shrub planting to be planted in groups of 5-7no. of each species and as above
- Proposed grass areas to receive good quality amenity grass turves laid in line with good horticultural practices
- Proposed areas of angular chippings for top dressing. Laid over a weed proof membrane
- Proposed root barrier
- Indicative locations of private street lighting bollards, extents TBC by TWWL and subject to specialist design.
- Indicative adoptable street lighting designed by TBC specialist.
- Cut lines

Please see Planting Schedule on sheet