

DUCKWORTHS
ARBORICULTURE LTD.

ARBORICULTURAL REPORT

TREE CONDITION SURVEY

NINE MILE RIDE PRIMARY SCHOOL
430 FINCHAMPSTEAD RD
FINCHAMPSTEAD
BERKSHIRE
RG40 3RB

CLIENT: RACHEL TASKER / THE CIRCLE TRUST

NOVEMBER 2025
Ref: 06846 / 2025

REPORT BY: SARAH DUCKWORTH

DipArb(RFS), TechCert(ArborA), M. Arbor.A, BA (Hons)
LANTRA Professional Tree Inspector

E: sarahcduckworth@hotmail.com
M: 07810 440546



Prepared by:	Sarah Duckworth
Position:	Arboricultural Consultant
Qualifications:	DipArb(RFS),TechCert(ArborA),M. Arbor.A, BA (Hons), LANTRA Professional Tree Inspector

File ref:	06846 / 2025
Date Issued:	12 th November 2025

CONTENTS

1	INTRODUCTION	4
1.1	Instruction.....	4
1.2	Inspection information.....	4
1.3	Access.....	5
1.4	Qualifications.....	5
1.5	Insurance.....	5
2	STATUTORY TREE PROTECTION	6
2.1	Tree Preservation Orders.....	6
2.2	Conservation Areas	6
2.3	Felling Licences	6
3	GENERAL GUIDANCE.....	7
3.1	Tree Work Good Practice.....	7
3.2	Protected Species	7
3.3	Management of Deadwood	8
3.4	Ivy.....	8
4	SCOPE & LIMITATIONS	9
4.1	Scope	9
4.2	Caveats.....	9
5	TREE SURVEY DATA	11
6	TREE WORKS IN PRIORITY ORDER.....	23
7	SITE PLAN.....	28

1 INTRODUCTION

1.1 Instruction

This Arboricultural Report has been commissioned by Rachel Tasker on behalf of The Circle Trust. I have been asked to carry out a health and safety assessment of trees within the grounds of Nine Mile Ride Primary School, 430 Finchampstead Rd, Finchampstead, RG40 3RB.

This report is to specify any necessary remedial tree works to address identified hazards from the trees whilst acknowledging and respecting their significance to amenity and ecology of the local area.

1.2 Inspection information

The trees were inspected on Monday 27th October 2025 by Sarah Duckworth, Arboricultural Consultant. On the day of the survey the weather was clear. Visibility was good.

Trees were inspected from ground level only. Non-invasive inspection equipment (mallet and metal probe) were used to assess the structural integrity at the base and trunk of individual trees where the visual inspection identified the need.

The extent of the survey was limited to a survey of trees in the grounds of Nine Mile Ride Primary School as requested by the client. Fences present on site have been taken as the presumed site boundary. Neighbouring properties were not entered into or included in the survey.



Figure 1 – Survey Boundary

It is the client's responsibility to ensure that this report covers all areas under the brief of the tree inspection and refer any concerns regarding this matter back to the Arboricultural Consultant.

1.3 Access

The school grounds are accessed by pupils and staff throughout the year. Trees are therefore growing in areas considered to be growing in a moderate to high usage (occupancy) area.

1.4 Qualifications

Surveyor: Sarah Duckworth

- Royal Forestry Society's Professional Diploma
- Arboricultural Association's Technicians Certificate (with Distinction)
- LANTRA qualified Professional Tree Inspector
- Arboricultural Association Professional Member

1.5 Insurance

Sarah Duckworth t/a Duckworths Arboriculture Limited is insured with Hiscox Insurance.

- Public Liability £10,000,000
- Professional Indemnity £2,000,000

Copies of the insurance documents are available on request.

2 STATUTORY TREE PROTECTION

2.1 Tree Preservation Orders

I have confirmed on the Wokingham Borough Council website that at the time of this report, a number of trees along the northeast boundary and within the survey area are protected by Tree Preservation Orders (ref TPO-0512-1989 and TPO-0091-1975).

No works should be undertaken to any trees on site without the prior written consent of the Local Planning Authority – Wokingham Borough Council.

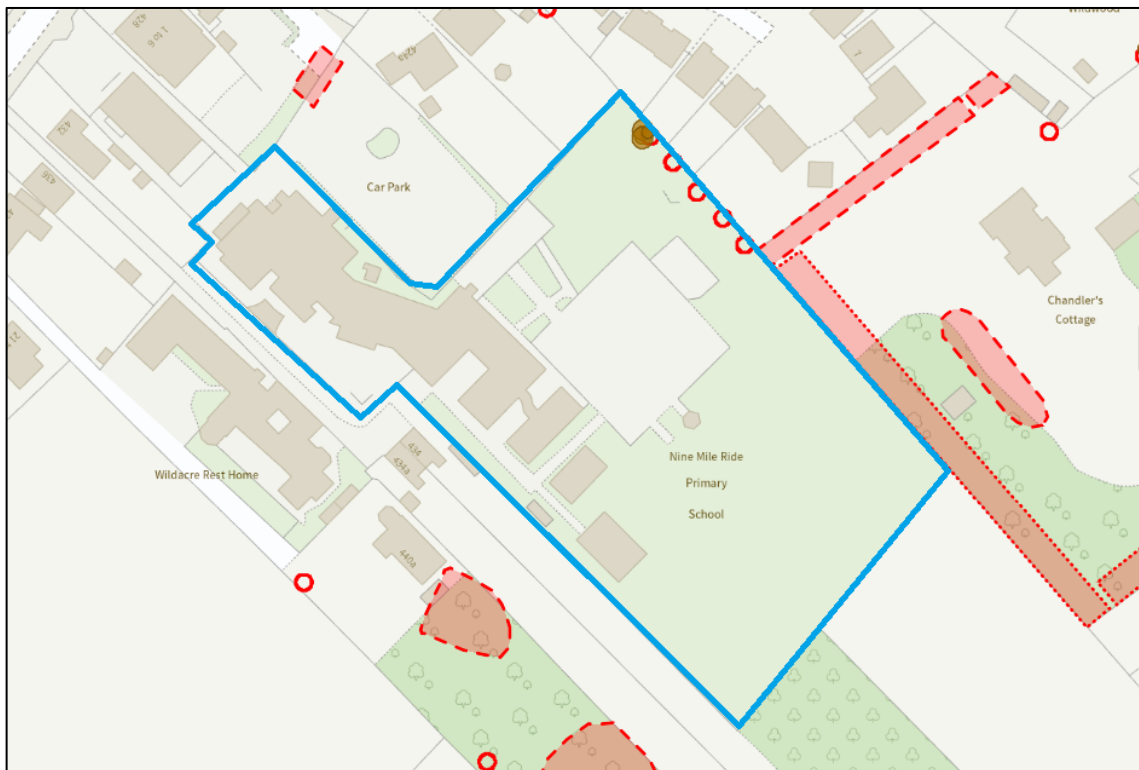


Figure 2 - Wokingham Borough Council Tree Preservation Order Map

2.2 Conservation Areas

Nine Mile Ride Primary School is not within a Conservation Area.

2.3 Felling Licences

Outside of domestic gardens, you must first apply to the Forestry Commission for a felling licence if you want to cut down trees containing more than five cubic metres of wood in any calendar quarter. However, there are exceptions to this rule. For example, you do not need a licence to fell trees in enclosed gardens or removing dead or dangerous trees.

The Forestry Commission usually requires felled trees to be restocked and does not normally grant licences to clear woodland permanently.

3 GENERAL GUIDANCE

3.1 Tree Work Good Practice

All tree works specified should be undertaken in accordance with BS:3998 2010 'Tree Work Recommendations'.

In order to limit the harm to trees caused by the pruning operations, pruning work on live trees (aside from trees to be felled) should be undertaken in the summer months (July and August) avoiding periods of drought. No tree pruning work is advisable during the period immediately before or after leaf break (February to June) when the trees' energy reserves are most depleted.

Chippings arising from the work should not be piled around the bases of trees on or off the site. Wood, brash and any other arisings from the tree work should not be burnt on site.

You are advised to use a properly qualified and experienced company who carry Public and Products Liability Insurance with a minimum of £2,000,000 cover and the relevant Employers Liability Insurance. A List of approved contractors is available from the Arboricultural Association – www.trees.org.uk.

3.2 Protected Species

In accordance with the Wildlife and Countryside Act - 1981, Conservation - Natural Habitats - Regulations 1994 and Countryside Rights of Way Act - 2000, you must consider the timing and type of tree work operations including hedge pruning to avoid causing disturbance to any nesting or breeding birds or bat roosts that may be present within trees and hedgerows.

It is an offence (subject to exceptions) to intentionally kill, injure, or take, possess, or trade in any wild animal listed, and prohibits interference with places used for shelter or protection, or intentionally disturbing animals occupying such places.

Non-urgent major tree work involving tree removal or reduction and hedge cutting operations should not be undertaken during the bird nesting or breeding season, which is considered to be from 1 March to 31 July. However, depending on seasonal temperatures, some birds continue breeding into August and September.

All wild birds, their young, their eggs and active nests are protected under law. It is an offence to damage a nest intentionally while it is in use or being built and hedge cutting is highly likely to damage nests or cause them to be deserted.

3.3 Management of Deadwood

Dead and decaying trees are vital components of a properly functioning wooded ecosystem and play a key role in sustaining biodiversity and soil fertility. A balanced and healthy tree ecosystem features deadwood in various locations both on the ground and in the canopy. It is therefore undesirable to remove all areas of dead or decaying wood from the tree groups as this would harm the natural ecosystem. Standing deadwood, dead branches and other defects with ecological value have been retained where it is considered reasonable and safe to do so.

Where trees are removed, it will benefit the local ecology to leave a high stump (ideally 2-3m) as a standing monolith where it is safe and reasonable to do so, a percentage of the wood, (particularly wood that is already decayed) should be stacked and left on site for habitat value where possible (taking care not to restrict access for future surveys).

3.4 Ivy

Ivy is an attractive habitat for insects and invertebrates and consequently bird and animal life can benefit as a result of an increase in available food source. Bats, which are rare and protected by law regularly roost amongst ivy, as well as inside small cavities in suitable trees. Ivy growth is not a threat to the health of otherwise healthy trees; however, it does obscure the base, trunk and forks of trees.

Defects present on trees can be hidden by ivy and dense vegetation. It was beyond the scope of this survey to clear ivy and vegetation from around all trees and the client is advised that where present, climbing plants and dense vegetation may obscure trunk defects.

When severing ivy it is important to use sharp hand tools only. Ivy stems should be cut at ground level and 1.5m, taking care not to damage the tree bark. Cut stems should then be removed to height of 1.5m. The ivy growth above 1.5m can be left in the canopy (unless it obscures another necessary point of inspection) from where it will die back and eventually fall from the tree.

4 SCOPE & LIMITATIONS

4.1 Scope

Trees within the school grounds have been looked at in detail using the 'Diagnosis of Ill Health in trees' and Inspecting Trees for Signs of Decay' methodologies described by R.G. Strouts and T.G. Winter¹.

A visual assessment is a non-invasive method of examining the health and structural condition of an individual tree. The trees were assessed from ground level only and were not climbed.

Non-invasive inspection equipment (plastic-headed mallet and metal probe) were used to make an assessment of the structural integrity at the base and trunk of each tree where the visual inspection identified the need. The lower stems of trees were tapped with a plastic-headed mallet to check for indications of internal decay. The differing sound intonation can often reveal some types of decay or hollow trunks. Any cavities in the base of the stem were probed with a steel rod to record depth and condition of residual wood.

The report is to identify visible defects on trees and to specify any necessary remedial tree works which may be required to address identified hazards from the trees whilst acknowledging and respecting their local significance to the amenity of the residential development biodiversity of the wider landscape.

4.2 Caveats

Trees are dynamic living organisms subject to change, whose health and condition can be subject to significant change influenced by internal and external factors. The assessment, conclusions and recommendations from the report are based on the condition of the trees and surrounding ground conditions at the time of my visit. If the condition of the trees evidently changes or where tree(s) are subject to development or ground works within their rooting areas or extreme weather conditions, further inspection may be required.

The survey looks for defects which may make the failure of all or part of the tree foreseeable. The report then makes recommendations for remedial works which would reduce the probability of failure where the hazard presented poses an unacceptable risk to persons or property. Healthy trees or parts of healthy trees may fail in normal weather situations, although the risk increases with storm conditions and, as the consequences of such weather events are unforeseeable, Sarah Duckworth (trading as Duckworths Arboriculture Limited) cannot be held liable for any such failures.

It was beyond the scope of this survey to sever and remove ivy or clear dense vegetation. Reasonable effort was made to access the base of each tree, however in some areas, dense vegetation and ivy prevented a full visual inspection of some trees - tree canopies and physiological health were still appraised.

¹ R.G Strouts & T.G. Winter, 'Diagnosis of Ill Health in Trees' Published for the Office of the Deputy Prime Minister, under license from the Controller of her Majesty's Stationery Office, Crown Copyright 1994.

The report is for the sole use of the client and its reproduction or use by anyone else is forbidden unless written consent is given by the author.

This report is valid for two years from the survey date. Specifications for remedial works are based on an assumed reinspection within two years. A follow-on inspection of trees is due before 27th October 2027.

Trees can never be guaranteed 100% safe. Regular inspections by competent and / or suitably qualified arboriculturists will help identify potential problems before they become acute.

5 TREE SURVEY DATA

Ref:	Species	Measurements	Survey Notes	Condition	Other Data	Recommendations
T001	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 18 Crown Radius (m): 8 DBH (cm): 68 Life Stage: Mature Life Exp.: 40+ Years	Mature ivy clad oak within 1.5m of school building. Within gated area. No access to base. Growing as a pair. Asymmetrical crown. Some deadwood in canopy. Bud density normal.	Fair	Public Amenity Value: Good Wildlife Value: Good Inspection Limitations: Access	Sever ivy and remove any deadwood. Timescale: 27-Apr-2026 (6 Months)
T002	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 18 Crown Radius (m): 8 DBH (cm): 68 Life Stage: Mature Life Exp.: 40+ Years	Mature ivy clad oak within 1.5m of school building. Within gated area. No access to base. Growing as a pair. Asymmetrical crown. Some deadwood in canopy. Bud density normal.	Fair	Public Amenity Value: Good Wildlife Value: Good Inspection Limitations: Access	Sever ivy and remove any deadwood. Timescale: 27-Apr-2026 (6 Months)
T003	Sycamore (<i>Acer pseudoplatanus</i>)	Height (m): 9 Crown Radius (m): 5 DBH (cm): 15 Stems: 3 Life Stage: Semi Mature Life Exp.: 20+ Years	Twin stem from 0.2m. multi-stem tree with metal railings between stems. Included bark between two larger trunks. Swept stems. Ivy clad. Suppressed, asymmetrical crown. Foliage density normal.	Fair	Public Amenity Value: Moderate Wildlife Value: Low	No works identified.
T004	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 14 Crown Radius (m): 7 DBH (cm): 50 Life Stage: Mature Life Exp.: 40+ Years	Base clear, bark intact. Rooting area mostly tarmac. Swept stem, adaptive growth at base. Three way stem fork at 4m. Superficial bark damage to one low branch probably from vehicle strikes. Small to medium sized deadwood throughout crown. Foliage density on live growth normal.	Fair	Public Amenity Value: Good Wildlife Value: Good	Remove deadwood. Timescale: 27-Jan-2026 (3 Months)
T005	Flowering cherry (<i>Prunus Serrulata</i>)	Height (m): 5.5 Crown Radius (m): 2.5 DBH (cm): 15 Life Stage: Early Mature Life Exp.: 40+ Years	Small ornamental tree. Manhole cover and services close to trunk. Twin stem from 1m. Cup union forming in weak fork structure. Small tree, not an immediate health and safety concern. Foliage dense and even. Good vitality	Fair	Public Amenity Value: Low Wildlife Value: Low	No works identified.
T006	Silver birch (<i>Betula pendula</i>)	Height (m): 11 Crown Radius (m): 2.5 DBH (cm): 20 Life Stage: Mature Life Exp.: 40+ Years	Slender ornamental tree. Twin stem from 1.6m. Cup union forming. Foliage dense and even. Good vitality.	Fair	Public Amenity Value: Moderate Wildlife Value: Low	No works identified.
T007	Flowering cherry (<i>Prunus Serrulata</i>)	Height (m): 5 Crown Radius (m): 2 DBH (cm): 7 Life Stage: Early Mature Life Exp.: 40+ Years	Small ornamental tree. Suppressed, asymmetrical crown. Foliage dense and even. Good vitality.	Fair	Public Amenity Value: Low Wildlife Value: Low	No works identified.
T008	Silver birch (<i>Betula pendula</i>)	Height (m): 13 Crown Radius (m): 2 DBH (cm): 16 Life Stage: Mature Life Exp.: 40+ Years	Slender ornamental tree. Asymmetrical crown. Foliage slightly sparse. Fair form and vitality.	Fair	Public Amenity Value: Moderate Wildlife Value: Low	No works identified.

Ref:	Species	Measurements	Survey Notes	Condition	Other Data	Recommendations
T009	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 17 Crown Radius (m): 7 DBH (cm): 75 Life Stage: Mature Life Exp.: 40+ Years	Base partially obscured by ivy and vegetation. Where accessible base clear, bark intact. Rooting area mostly tarmac - roots lifting tarmac. Asymmetrical uneven lower trunk. Small to large sized deadwood throughout crown. Foliage density on live growth normal.	Fair	Public Amenity Value: Good Wildlife Value: Good	Remove deadwood. Sever ivy. Timescale: 27-Jan-2026 (3 Months)
T010	Common holly (<i>Ilex aquifolium</i>)	Height (m): 10 Crown Radius (m): 2.5 DBH (cm): 20 Stems: 2 Life Stage: Mature Life Exp.: 40+ Years	Small tree. Swept stem. Entwined branches and areas of bark inclusion. Foliage dense. Good vitality.	Fair	Public Amenity Value: Low Wildlife Value: Moderate	No works identified.
T011	Cultivar apple (<i>Malus domestica</i>)	Height (m): 2 Crown Radius (m): 1 DBH (cm): 2 Life Stage: Young Life Exp.: 20+ Years	Small fruit tree. Slender stem vulnerable to damage.	Fair	Public Amenity Value: Low Wildlife Value: Low	No works identified.
T012	Common holly (<i>Ilex aquifolium</i>)	Height (m): 7 Crown Radius (m): 2 DBH (cm): 10 Life Stage: Mature Life Exp.: 40+ Years	Small tree. Epicormic growth from base. Ivy clad. Foliage dense. Good vitality.	Fair	Public Amenity Value: Low Wildlife Value: Moderate	No works identified.
T013	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 11 Crown Radius (m): 4 DBH (cm): 13 Stems: 2 Life Stage: Early Mature Life Exp.: 40+ Years	Small ivy clad tree. Base obscured by dense vegetation. Twin stem. Suppressed, asymmetrical crown. Foliage dense and even. Good vitality.	Fair	Public Amenity Value: Low Wildlife Value: Low Inspection Limitations: Dense vegetation	No works identified.
T014	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 20 Crown Radius (m): 9 DBH (cm): 100 Life Stage: Mature Life Exp.: 40+ Years	Base partially obscured by holly and close board boundary fence. Old wire fence around trunk. Where accessible base clear, bark intact. Sound intonation even and satisfactory. Single stem with large lateral branches. Broad low crown. Unusually formed fork around 10m above ground level. Major deadwood in crown including a large limb in advanced decline over neighbouring gardens. Scars from previous branch failure in upper crown. Foliage dense and heavily weighted towards tips. Good vitality. Low branches close to neighbouring outbuilding.	Fair	Public Amenity Value: Good Wildlife Value: Good Inspection Limitations: Wire and dense vegetation	Remove deadwood and large declining branch back to healthy growth. Cut and remove 2x wire around lower trunk. Reduce height and northeast side of crown over neighbouring gardens by 2-2.5m and crown lift to create 2m canopy clearance over neighbouring outbuilding. Inspect structure of fork at the top of the vertical stem when climbing tree. Timescale: 27-Nov-2025 (1 Month)

Ref:	Species	Measurements	Survey Notes	Condition	Other Data	Recommendations
T015	Common holly (<i>Ilex aquifolium</i>)	Height (m): 5 Crown Radius (m): 2 DBH (cm): 10 Life Stage: Mature Life Exp.: 40+ Years	Multi-stem boundary tree with feathered crown and low branches to ground level. Foliage dense. Good vitality.	Fair	Public Amenity Value: Low Wildlife Value: Moderate Inspection Limitations: Dense low crown	No works identified.
T016	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 20 Crown Radius (m): 7 DBH (cm): 45 Stems: 3 Life Stage: Mature Life Exp.: 40+ Years	Three stems from ground level. Two stems fully fused together. Access to base restricted by dense holly and close board boundary fence. Scar on central trunk where wire fence included into trunk. Where accessible bases clear, bark intact. Leaf litter built up around base from neighbouring property. Where accessible, sound intonation even and satisfactory. Broad crown cut back over neighbouring garden. Foliage dense. Good vitality.	Fair	Public Amenity Value: Good Wildlife Value: Good Inspection Limitations: Fence and dense vegetation	No works identified.
G017	Blackthorn x4 (<i>Prunus spinosa</i>)	Height (m): 5 Crown Radius (m): 2.5 DBH (cm): 8 Trees: 4 Life Stage: Mature Life Exp.: 20+ Years	Ivy clad tree group of varying heights and trunk diameters. Lapsed hedge group. Poor form. Foliage density good.	Fair	Public Amenity Value: Low Wildlife Value: Moderate	No works identified.
T018	Sweet gum (<i>Liquidambar styraciflua</i>)	Height (m): 9 Crown Radius (m): 2 DBH (cm): 15 Life Stage: Early Mature Life Exp.: 40+ Years	Multiple leaders in upper crown. Slender tree. Foliage density good.	Fair	Public Amenity Value: Moderate Wildlife Value: Low	No works identified.
T019	Flowering cherry (<i>Prunus Serrulata</i>)	Height (m): 3 Crown Radius (m): 2 DBH (cm): 10 Life Stage: Dead	Small standing dead tree.	Dead	Public Amenity Value: Low Wildlife Value: Low	Fell to ground level. Timescale: 27-Jan-2026 (3 Months)
T020	Cultivar apple (<i>Malus domestica</i>)	Height (m): 5.5 Crown Radius (m): 3 DBH (cm): 13 Life Stage: Mature Life Exp.: 40+ Years	Small fruit tree. Dense suckering from base and epicormic growth throughout crown. Swept stem. Foliage density normal.	Fair	Public Amenity Value: Low Wildlife Value: Low	No works identified.
T021	Swedish whitebeam (<i>Sorbus intermedia</i>)	Height (m): 6 Crown Radius (m): 2.5 DBH (cm): 13 Life Stage: Mature Life Exp.: 40+ Years	Small tree. Epicormic growth around base. Small crown suppressed by adjacent trees. Foliage density normal.	Fair	Public Amenity Value: Low Wildlife Value: Low	No works identified.
T022	Cultivar apple (<i>Malus domestica</i>)	Height (m): 6 Crown Radius (m): 4 DBH (cm): 35 Life Stage: Mature Life Exp.: 40+ Years	Large ivy clad fruit tree. Epicormic growth from base, prolific ivy throughout crown. Foliage density normal.	Fair	Public Amenity Value: Low Wildlife Value: Low Inspection Limitations: Prolific ivy	Sever ivy prior to next inspection. Timescale: 27-Oct-2026 (1 Year)

Ref:	Species	Measurements	Survey Notes	Condition	Other Data	Recommendations
T023	Caucasian fir (<i>Abies nordmanniana</i>)	Height (m): 7 Crown Radius (m): 1.5 DBH (cm): 20 Life Stage: Early Mature Life Exp.: 40+ Years	Small tree within significant growth potential. Foliage dense - good vitality.	Good	Public Amenity Value: Low Wildlife Value: Low	No works identified.
T024	Silver birch (<i>Betula pendula</i>)	Height (m): 11 Crown Radius (m): 2 DBH (cm): 10 Stems: 2 Life Stage: Mature Life Exp.: 40+ Years	Slender ornamental tree. Twin stem from 1m. Form structure satisfactory. Bark damage where kids have stripped outer bark layers. Foliage density normal. Good vitality.	Fair	Public Amenity Value: Moderate Wildlife Value: Low	No works identified.
T025	Silver birch (<i>Betula pendula</i>)	Height (m): 13 Crown Radius (m): 2 DBH (cm): 10 Life Stage: Mature Life Exp.: 40+ Years	Slender ornamental tree. Asymmetrical crown. Foliage density normal. Fair form and vitality.	Fair	Public Amenity Value: Moderate Wildlife Value: Low	No works identified.
T026	Norway maple (<i>Acer platanoides</i>)	Height (m): 15 Crown Radius (m): 4 DBH (cm): 35 Life Stage: Mature Life Exp.: 40+ Years	Girdling root. Base clear, bark intact. Twin stem from 2m. Included bark in fork. Structure not optimal but currently satisfactory. Minor deadwood in central canopy. Bud density normal.	Fair	Public Amenity Value: Good Wildlife Value: Moderate	No works identified.
T027	Tulip tree (<i>Liriodendron tulipifera</i>)	Height (m): 15 Crown Radius (m): 5 DBH (cm): 40 Life Stage: Mature Life Exp.: 20+ Years	Base clear, bark intact. Single stem to 3.5m. Wide fork currently satisfactory. Several dead branches in lower crown. Upper crown autumnal. Foliage in upper crown stunted.	Fair	Public Amenity Value: Good Wildlife Value: Moderate	Remove deadwood. Timescale: 27-Apr-2026 (6 Months)
G028	Osier x10 (<i>Salix viminalis</i>)	Height (m): 6 Crown Radius (m): 4 DBH (cm): 10 Trees: 10 Life Stage: Mature Life Exp.: 20+ Years	Lapsed willow sculpture formed of linear groups of trees. Past reductions have created poor structural form. Several broken branches in group.	Fair	Public Amenity Value: Low Wildlife Value: Low	Restructure willow sculpture with removal of deadwood and removal /reduction of large woody stems and retraining younger, more pliable stems to form archway. Timescale: 27-Oct-2026 (1 Year)
T029	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 17 Crown Radius (m): 7 DBH (cm): 70 Life Stage: Mature Life Exp.: 40+ Years	Access to base restricted by dense holly and close board boundary fence. Where accessible base clear, bark intact. Leaf litter built up around base from neighbouring property. Where accessible, sound intonation even and satisfactory. Oval crown suppressed by adjacent trees. Deadwood over neighbouring garden. Foliage density normal.	Fair	Public Amenity Value: Good Wildlife Value: Good Inspection Limitations: Fence and dense vegetation	Remove deadwood over neighbouring garden. Timescale: 27-Apr-2026 (6 Months)
T030	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 4 Crown Radius (m): 4 DBH (cm): 20 Life Stage: Mature Life Exp.: 40+ Years	Access to base restricted by dense holly and close board boundary fence. Short tree growing over low occupancy storage area. Suppressed, low crown	Poor	Public Amenity Value: Low Wildlife Value: Low Inspection Limitations: Ivy and dense vegetation	No works identified.

Ref:	Species	Measurements	Survey Notes	Condition	Other Data	Recommendations
T031	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 19 Crown Radius (m): 7 DBH (cm): 85 Stems: 2 Life Stage: Mature Life Exp.: 40+ Years	Access to base restricted by dense holly and close board boundary fence. Twin stem or two large trees from single growth points. Where accessible bases clear, bark intact. Included bark between stems but no sign of separation. Where accessible, sound intonation even and satisfactory. Broad, asymmetrical crown. Foliage density normal.	Fair	Public Amenity Value: Good Wildlife Value: Good Inspection Limitations: Fence and dense vegetation	No works identified.
T032	Common holly (<i>Ilex aquifolium</i>)	Height (m): 10 Crown Radius (m): 3.5 DBH (cm): 20 Stems: 2 Life Stage: Mature Life Exp.: 20+ Years	Small tree, twin stem from ground level. Foliage density normal.	Fair	Public Amenity Value: Low Wildlife Value: Moderate	No works identified.
T033	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 19 Crown Radius (m): 7 DBH (cm): 90 Life Stage: Mature Life Exp.: 40+ Years	Old bankside tree with pronounced, stilted buttress roots. Ivy stems directly at base of tree. Access to base restricted by dense holly and boundary fence. Where accessible base clear, bark intact. Where accessible, sound intonation even and satisfactory. No fungal fruiting bodies evident. Broad, asymmetrical crown. Foliage density normal.	Fair	Public Amenity Value: Good Wildlife Value: Good Inspection Limitations: Fence and dense vegetation	No works identified.
T034	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 11 Crown Radius (m): 7 DBH (cm): 45 Life Stage: Mature Life Exp.: 40+ Years	Medium sized oak. Base clear, bark intact. Swept low trunk. Adaptive buttress roots at base. Asymmetrical crown. Foliage density normal.	Fair	Public Amenity Value: Moderate Wildlife Value: Moderate	No works identified.
T035	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 20 Crown Radius (m): 8 DBH (cm): 90 Life Stage: Mature Life Exp.: 40+ Years	Base clear, bark intact. No fungal fruiting bodies evident or audible decay. Single stem with several pruning cuts in trunk where lower branches have been removed. Poor rates of wound wood growth. High crown. Deadwood in crown including large branch over neighbouring garden Foliage density slightly sparse and clustered towards tips.	Fair	Public Amenity Value: Good Wildlife Value: Good Inspection Limitations: Fence and dense vegetation	Remove deadwood over neighbouring garden. Timescale: 27-Jan-2026 (3 Months)
T036	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 9 Crown Radius (m): 7 DBH (cm): 40 Life Stage: Mature Life Exp.: 40+ Years	Medium sized oak. Base clear, bark intact. Swept low trunk. Adaptive buttress roots at base. Asymmetrical crown. Foliage density normal.	Fair	Public Amenity Value: Moderate Wildlife Value: Moderate	No works identified.
T037	Silver birch (<i>Betula pendula</i>)	Height (m): 16 Crown Radius (m): 4 DBH (cm): 40 Life Stage: Mature Life Exp.: 40+ Years	Single stem tree. Base clear, bark intact. Swept trunk away from dense tree cover. Adaptive buttress roots at base. Cables tied around trunk. Asymmetrical crown. Minor deadwood. Foliage density normal.	Fair	Public Amenity Value: Moderate Wildlife Value: Moderate	No works identified.
T038	Silver birch (<i>Betula pendula</i>)	Height (m): 11 Crown Radius (m): 1.5 DBH (cm): 13 Life Stage: Mature Life Exp.: 20+ Years	Single stem slender tree. Base clear, bark intact. Cables tied around trunk. Suppressed, asymmetrical crown. Minor deadwood. Foliage slightly sparse.	Fair	Public Amenity Value: Moderate Wildlife Value: Moderate	No works identified.

Ref:	Species	Measurements	Survey Notes	Condition	Other Data	Recommendations
T039	Silver birch (<i>Betula pendula</i>)	Height (m): 13 Crown Radius (m): 5 DBH (cm): 40 Life Stage: Mature Life Exp.: 20+ Years	Single stem tree. Base clear, bark intact. Swept low trunk away from dense tree cover. Adaptive buttress roots at base. Cables tied around trunk. Asymmetrical crown. Minor deadwood. Foliage density normal.	Fair	Public Amenity Value: Moderate Wildlife Value: Moderate	No works identified.
T040	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 9 Crown Radius (m): 5 DBH (cm): 35 Life Stage: Mature Life Exp.: 40+ Years	Medium sized oak. Base clear, bark intact. Swept low trunk. Adaptive buttress roots at base. Asymmetrical, suppressed crown. Foliage density normal.	Fair	Public Amenity Value: Moderate Wildlife Value: Moderate	No works identified.
G041	Pedunculate oak x2 (<i>Quercus robur</i>) Common hawthorn (<i>Crataegus monogyna</i>)	Height (m): 9 Crown Radius (m): 3 DBH (cm): 20 Life Stage: Early Mature Life Exp.: 20+ Years	Three small trees. Multi-stem. Suppressed form. Asymmetrical canopies.	Fair	Public Amenity Value: Low Wildlife Value: Low	No works identified.
T042	Silver birch (<i>Betula pendula</i>)	Height (m): 13 Crown Radius (m): 5 DBH (cm): 43 Life Stage: Mature Life Exp.: 20+ Years	Single stem tree. Base clear, bark intact. Swept low trunk away from dense tree cover. Adaptive buttress roots at base. Twin stem from 2m. Fork satisfactory. Cables tied around trunk. Asymmetrical crown. Minor deadwood. Foliage density normal.	Fair	Public Amenity Value: Moderate Wildlife Value: Moderate	No works identified.
T043	Poplar (<i>Populus sp.</i>)	Height (m): 11 Crown Radius (m): 2 DBH (cm): 10 Stems: 3 Life Stage: Mature Life Exp.: 40+ Years	Mechanical damage to long exposed surface roots. Three stems from ground level. Slender crown. Foliage density normal.	Fair	Public Amenity Value: Moderate Wildlife Value: Low	No works identified.
T044	Crab apple (<i>Malus sylvestris</i>)	Height (m): 9 Crown Radius (m): 3 DBH (cm): 12 Life Stage: Mature Life Exp.: 20+ Years	Compaction at base. Small ornamental tree. Swept stem. No significant defects.	Fair	Public Amenity Value: Low Wildlife Value: Low	No works identified.
T045	Flowering cherry (<i>Prunus Serrulata</i>)	Height (m): 10 Crown Radius (m): 4 DBH (cm): 40 Life Stage: Mature Life Exp.: 20+ Years	Compaction at base. Mechanical damage to exposed surface roots. Small ornamental tree. Swept stem. Included bark in forks 2m above ground level. No significant defects.	Fair	Public Amenity Value: Low Wildlife Value: Low	No works identified.
T046	Flowering cherry (<i>Prunus Serrulata</i>)	Height (m): 9 Crown Radius (m): 4 DBH (cm): 30 Life Stage: Mature Life Exp.: 20+ Years	Compaction at base. Small ornamental tree. Trunk forks 3m above ground level. No significant defects.	Fair	Public Amenity Value: Low Wildlife Value: Low	No works identified.
T047	Common hawthorn (<i>Crataegus monogyna</i>)	Height (m): 3 Crown Radius (m): 2 DBH (cm): 9 Life Stage: Mature Life Exp.: 20+ Years	Small ornamental tree. Broken hanging branch low in short crown. Suppressed, low crown. Foliage density normal.	Fair	Public Amenity Value: Low Wildlife Value: Low	No works identified.

Ref:	Species	Measurements	Survey Notes	Condition	Other Data	Recommendations
T048	Silver birch (<i>Betula pendula</i>)	Height (m): 6 Crown Radius (m): 3.5 DBH (cm): 13 Life Stage: Mature Life Exp.: 20+ Years	Compaction at base. Stocky small tree. Broad low crown. Decurrent form. No significant defects.	Fair	Public Amenity Value: Low Wildlife Value: Low	No works identified.
T049	West Himalayan birch (<i>Betula utilis</i> ' <i>Jacquemontii</i> ')	Height (m): 8 Crown Radius (m): 5 DBH (cm): 25 Life Stage: Mature Life Exp.: 20+ Years	Compaction at base. Multiple branching from 1m. Broad low crown. Decurrent form. Stripped bark on trunk. Foliage density normal. No significant defects.	Fair	Public Amenity Value: Low Wildlife Value: Low	No works identified.
T050	Caucasian ash (<i>Fraxinus oxycarpa</i>)	Height (m): 5.5 Crown Radius (m): 3 DBH (cm): 20 Life Stage: Mature Life Exp.: 20+ Years	Compaction at base. Girdling root. Small ornamental tree. Multiple branching from 2m. Compact round crown. Decurrent form. Bud density normal. No significant defects.	Fair	Public Amenity Value: Low Wildlife Value: Low	No works identified.
T051	Sycamore (<i>Acer pseudoplatanus</i>)	Height (m): 9 Crown Radius (m): 4.5 DBH (cm): 25 Life Stage: Mature Life Exp.: 20+ Years	Small tree. Broad low crown. Foliage slightly stunted. Minor deadwood. Outer branch tips 0.3m from wooden building. No significant defects.	Fair	Public Amenity Value: Low Wildlife Value: Low	No works identified.
T052	Flowering cherry (<i>Prunus Serrulata</i>)	Height (m): 4.5 Crown Radius (m): 3.5 DBH (cm): 42 Life Stage: Mature Life Exp.: 20+ Years	Small tree. Broad low crown. Three way stem fork at 1.5m above ground level. Outer branch tips touching wooden building. Bud density normal.	Fair	Public Amenity Value: Low Wildlife Value: Low	Cut back lateral branches to create 1m canopy clearance to building. Timescale: 27-Jan-2026 (3 Months)
T053	Paperbark cherry (<i>Prunus serrula</i>)	Height (m): 3.5 Crown Radius (m): 2.5 DBH (cm): 15 Life Stage: Early Mature Life Exp.: 40+ Years	Multi-stem ornamental tree. Manhole cover and services close to base. Twin stem from 0.4m. shrubby form, bud density normal. Satisfactory clearance to adjacent building at present.	Fair	Public Amenity Value: Low Wildlife Value: Low	No works identified.
T054	Flowering cherry (<i>Prunus Serrulata</i>)	Height (m): 4.5 Crown Radius (m): 2.5 DBH (cm): 25 Life Stage: Early Mature Life Exp.: 40+ Years	Small ornamental tree. Multiple branches from 1m with included bark between stems. Small tree, not an health and safety concern. Bud distribution dense and even. Good vitality	Fair	Public Amenity Value: Low Wildlife Value: Low	No works identified.
T055	Cultivar apple (<i>Malus domestica</i>)	Height (m): 5.5 Crown Radius (m): 4.5 DBH (cm): 35 Life Stage: Mature Life Exp.: 20+ Years	Small tree. Broad low crown. Multiple branching from 2m. Outer branch tips touching adjacent building. Fair form and vitality. Bud density normal.	Fair	Public Amenity Value: Low Wildlife Value: Low	Cut back lateral branches to create 1m canopy clearance to building. Timescale: 27-Jan-2026 (3 Months)
T056	Snowy mespilus (<i>Amelanchier lamarckii</i>)	Height (m): 4 Crown Radius (m): 1.5 DBH (cm): 5 Life Stage: Mature Life Exp.: 20+ Years	Multi-stem large shrub /small tree. Three entwined stems. Bud density normal.	Fair	Public Amenity Value: Low Wildlife Value: Low	No works identified.

Ref:	Species	Measurements	Survey Notes	Condition	Other Data	Recommendations
T057	Laurel cherry (<i>Prunus laurocerasus</i>)	Height (m): 4 Crown Radius (m): 3 DBH (cm): 10 Life Stage: Mature Life Exp.: 20+ Years	Large shrub physically separated by new boundary fence. Roots impacted by wet pour play surface and may have been cut during installation. Multiple pruning cuts on trunk. Canopy lacks vitality. Further decline likely.	Poor	Public Amenity Value: Low Wildlife Value: Low	Fell to ground level. Timescale: 27-Oct-2026 (1 Year)
G058	Lawson cypress x5 (<i>Chamaecyparis lawsoniana</i>)	Height (m): 11 Crown Radius (m): 4.5 DBH (cm): 50 Life Stage: Mature Life Exp.: 20+ Years	Five trees within all off-site lapsed hedging group. Branches low over wooden outbuilding within school site.	Fair	Public Amenity Value: Moderate Wildlife Value: Moderate Inspection Limitations: Access	No works identified.
G059	Hazel x5 (<i>Corylus avellana</i>)	Height (m): 6 Crown Radius (m): 3.5 DBH (cm): 9 Trees: 5 Life Stage: Mature Life Exp.: 40+ Years	Large, lapsed coppice stools. Decay on lower stumps. Foliage clustered at tips. Concerns have been raised regarding nuts present in school. Coppicing trees will prevent nuts developing for several years. Cut stools should be protected from damage by deer / pupils to support regenerative growth.	Fair	Public Amenity Value: Low Wildlife Value: Moderate	Coppice all stems just above ground level - see notes. Timescale: 27-Oct-2026 (1 Year)
T060	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 10 Crown Radius (m): 3 DBH (cm): 20 Life Stage: Semi Mature Life Exp.: 20+ Years	Young tree in sheltered location. Base clear, bark intact. Twin stem from 2.5m. Suppressed, asymmetrical crown. Foliage density normal.	Fair	Public Amenity Value: Low Wildlife Value: Moderate	No works identified.
T061	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 18 Crown Radius (m): 7 DBH (cm): 50 Life Stage: Mature Life Exp.: 40+ Years	Access to base restricted by dense holly and boundary fence. Ivy clad tree. Where visible, base clear, bark intact. Swept stem over school play area due to suppression from adjacent trees. Broad, asymmetrical crown. Minor deadwood and one larger dead branch over playground (passes behind T062). Small broken hanging branch over low occupancy area. Foliage density normal.	Fair	Public Amenity Value: Good Wildlife Value: Good Inspection Limitations: Fence and dense vegetation	Remove large dead branch behind T062. Timescale: 27-Jan-2026 (3 Months)
T062	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 18 Crown Radius (m): 7 DBH (cm): 30 Life Stage: Mature Life Exp.: 40+ Years	Access to base restricted by dense holly and boundary fence. Ivy clad tree. Where visible, base clear, bark intact. Swept stem over school play area due to suppression from adjacent trees. Slender etiolated form. Foliage density normal.	Fair	Public Amenity Value: Good Wildlife Value: Good Inspection Limitations: Ivy and dense vegetation	No works identified.
T063	Silver birch (<i>Betula pendula</i>)	Height (m): 18 Crown Radius (m): 5 DBH (cm): 35 Life Stage: Mature Life Exp.: 20+ Years	Light ivy growth on trunk. Base clear, bark intact. Twin stem from 5m with wide fork. Oval suppressed crown due to off-site trees. Foliage density normal. Medium sized dead branch (approximately 40mm diameter, 2.2m long) in crown over low occupancy area.	Fair	Public Amenity Value: Moderate Wildlife Value: Moderate	No works identified.
T064	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 15 Crown Radius (m): 5.5 DBH (cm): 35 Life Stage: Mature Life Exp.: 40+ Years	Medium sized oak. Base clear, bark intact. Suppressed oval crown. Epicormic shoots on all branches. Foliage slightly sparse. Deadwood in crown.	Fair	Public Amenity Value: Moderate Wildlife Value: Moderate	Remove deadwood. Timescale: 27-Jan-2026 (3 Months)

Ref:	Species	Measurements	Survey Notes	Condition	Other Data	Recommendations
T065	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 17 Crown Radius (m): 7 DBH (cm): 50 Life Stage: Mature Life Exp.: 40+ Years	Light ivy growth. Small volume of concrete dumped at base also chippings and soil. Where accessible, base clear, bark intact. Swept stem due to suppression from adjacent trees. Broad, asymmetrical crown. Sizeable deadwood over playground. Foliage density normal.	Fair	Public Amenity Value: Good Wildlife Value: Good Inspection Limitations: Fence and dense vegetation	Remove deadwood. Timescale: 27-Jan-2026 (3 Months)
T066	Lime (<i>Tilia sp.</i>)	Height (m): 17 Crown Radius (m): 5 DBH (cm): 35 Stems: 2 Life Stage: Mature Life Exp.: 40+ Years	Light ivy growth. Wood chippings and soil built up around base. Mature epicormic growth around base. Where accessible, base clear, bark intact. Twin stem from 0.6m. Broad, low crown. Foliage dense and even.	Fair	Public Amenity Value: Good Wildlife Value: Good Inspection Limitations: Fence and vegetation	No works identified.
T067	Scots pine (<i>Pinus sylvestris</i>)	Height (m): 16 Crown Radius (m): 3 DBH (cm): 35 Life Stage: Mature Life Exp.: 40+ Years	Compaction within rooting area. Base clear, bark intact. Single, vertical trunk. Asymmetrical crown due to suppression from adjacent trees. Slender etiolated form. Needle density good.	Good	Public Amenity Value: Good Wildlife Value: Good	No works identified.
T068	Poplar (<i>Populus sp.</i>)	Height (m): 16 Crown Radius (m): 2.5 DBH (cm): 30 Life Stage: Mature Life Exp.: 40+ Years	Compaction at base. Mechanical damage to exposed surface roots. Single stem. Significant area of stripped bark on trunk. Slender crown. Foliage density normal.	Fair	Public Amenity Value: Moderate Wildlife Value: Low	Install protection around trunk to prevent children from stripping bark to allow tree time to callus over exposed wound site. Timescale: 27-Jan-2026 (3 Months)
T069	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 17 Crown Radius (m): 7 DBH (cm): 60 Life Stage: Mature Life Exp.: 40+ Years	Base clear, bark intact. Single stem Swept stem due to suppression from adjacent trees. Broad, asymmetrical crown. Sizeable deadwood over playground. Foliage density normal.	Fair	Public Amenity Value: Good Wildlife Value: Good	Remove deadwood. Timescale: 27-Jan-2026 (3 Months)
T070	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 16 Crown Radius (m): 7 DBH (cm): 60 Life Stage: Mature Life Exp.: 40+ Years	Pronounced buttress roots. Base clear, bark intact. Where accessible, base clear, bark intact. Single stem to 2m. Fork satisfactory. Plastic straps around trunk. Low, asymmetrical crown. Sizeable deadwood over accessible play area. Foliage density normal.	Fair	Public Amenity Value: Good Wildlife Value: Good	Remove deadwood. Timescale: 27-Apr-2026 (6 Months)
T071	Silver birch (<i>Betula pendula</i>)	Height (m): 14 Crown Radius (m): 2 DBH (cm): 28 Life Stage: Mature Life Exp.: 20+ Years	Single stem tree. Base clear, bark intact. Swept low trunk away from dense tree cover. Adaptive growth at base. Slender suppressed crown. Etiolated form. Foliage density normal.	Fair	Public Amenity Value: Moderate Wildlife Value: Moderate	No works identified.
T072	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 10 Crown Radius (m): 8 DBH (cm): 30 Life Stage: Mature Life Exp.: 20+ Years	Logs stacked at base. Previously twin stem. Low decayed stump from second trunk at base. Rope tied around trunk. Standing stem forks 4m above ground level. Main crown extends low over picnic bench within school grounds. Suppressed, asymmetrical crown. Foliage density normal.	Fair	Public Amenity Value: Moderate Wildlife Value: Moderate Inspection Limitations: Wood stack	No works identified.


Ref:	Species	Measurements	Survey Notes	Condition	Other Data	Recommendations
T073	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 19 Crown Radius (m): 8 DBH (cm): 60 Life Stage: Mature Life Exp.: 40+ Years	Stump of felled smaller side trunk at base. Stilted buttress roots. Base clear, bark intact. No fungal fruiting bodies evident or audible decay. High crown. Historic wounds on branch in crown over shrub area in neighbouring garden. Foliage density normal.	Fair	Public Amenity Value: Good Wildlife Value: Good	No works identified.
G074	Common beech x3 (<i>Fagus sylvatica</i>)	Height (m): 11 Crown Radius (m): 3 DBH (cm): 20 Life Stage: Semi Mature Life Exp.: 40+ Years	Three young beech trees. Feathered form. One small tree topped at 1m. Good foliage density. Long term potential.	Good	Public Amenity Value: Moderate Wildlife Value: Low	No works identified.
T075	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 20 Crown Radius (m): 8 DBH (cm): 90 Life Stage: Mature Life Exp.: 40+ Years	Tree straddles fenced boundary line. Fence nailed to trunk. Where accessible, stilted buttress roots. Base clear, bark intact. No fungal fruiting bodies evident or audible decay. High crown. Historic wounds on trunk where large lower branches have been removed. Mature epicormic growth on trunk and branches - this should be protected and retained to sustain the tree's health. Foliage density slightly sparse. Deadwood in crown.	Fair	Public Amenity Value: Good Wildlife Value: Good Inspection Limitations: Access	Remove deadwood. Timescale: 27-Jan-2026 (3 Months)
T076	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 20 Crown Radius (m): 8 DBH (cm): 60 Life Stage: Mature Life Exp.: 40+ Years	Wide, stilted buttress roots. Base clear, bark intact. No fungal fruiting bodies evident or audible decay. Single stem. Pruning cuts on trunk. High, suppressed oval crown. No major deadwood. Foliage density normal.	Fair	Public Amenity Value: Good Wildlife Value: Good	No works identified.
T077	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 20 Crown Radius (m): 10 DBH (cm): 130 Life Stage: Mature Life Exp.: 40+ Years	Large oak. kids den built at base. Where accessible, base clear, bark intact. No fungal fruiting bodies evident or audible decay. Single stem to 1.5m. Fork structure satisfactory. Elongated limbs over school woodland play area. High, suppressed, asymmetrical crown. No major deadwood. Foliage density good.	Fair	Public Amenity Value: Good Wildlife Value: Good Inspection Limitations: Wood store / den	No works identified.
T078	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 16 Crown Radius (m): 2 DBH (cm): 35 Life Stage: Mature Life Exp.: 40+ Years	Slender tree consisting of single stem and no major branches. Stilted buttress roots. Stump of felled second stem at base. Foliage on multiple small branches off main trunk. Historic linear wound 1m above ground level where wire fence occluded into trunk. Apical Dieback / deadwood at top of trunk.	Fair	Public Amenity Value: Moderate Wildlife Value: Moderate	Remove deadwood. Timescale: 27-Jan-2026 (3 Months)
T079	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 19 Crown Radius (m): 5 DBH (cm): 60 Life Stage: Mature Life Exp.: 40+ Years	Restricted access to base due to dense holly. Ivy clad tree. Where accessible, base clear, bark intact. Swept stem to northeast over neighbouring residential gardens. Adaptive buttress roots at base. Asymmetrical, suppressed crown. Foliage density normal.	Fair	Public Amenity Value: Moderate Wildlife Value: Moderate	Sever ivy. Timescale: 27-Apr-2026 (6 Months)
T080	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 19 Crown Radius (m): 5 DBH (cm): 60 Life Stage: Mature Life Exp.: 40+ Years	Restricted access to base due to dense vegetation. Ivy clad tree. Where accessible, base clear, bark intact. Swept stem to northeast over neighbouring residential gardens. Adaptive growth at base. Asymmetrical, slender suppressed crown. Foliage density normal.	Fair	Public Amenity Value: Moderate Wildlife Value: Moderate	Sever ivy. Timescale: 27-Apr-2026 (6 Months)


Ref:	Species	Measurements	Survey Notes	Condition	Other Data	Recommendations
T081	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 20 Crown Radius (m): 8 DBH (cm): 85 Life Stage: Mature Life Exp.: 40+ Years	Base clear, bark intact. Swept stem to south west. Adaptive buttress roots at base. Base clear, bark intact. No fungal fruiting bodies evident or audible decay. Asymmetrical crown. Three large low branches over woodland play area. Lowest branch is dead and has old pruning cut at base. Foliage density normal - clustered towards tips.	Fair	Public Amenity Value: Moderate Wildlife Value: Moderate	Remove deadwood. Timescale: 27-Jan-2026 (3 Months)
T082	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 20 Crown Radius (m): 4 DBH (cm): 60 Life Stage: Mature Life Exp.: 40+ Years	Vegetation at base. Light ivy growth on trunk. Where accessible, base clear, bark intact. Single vertical stem. Large low dead branches over neighbouring residential gardens. High, slender suppressed crown. Foliage density normal.	Fair	Public Amenity Value: Moderate Wildlife Value: Moderate	Remove deadwood over neighbouring garden. Timescale: 27-Apr-2026 (6 Months)
G083	Pedunculate oak x3 (<i>Quercus robur</i>)	Height (m): 19 Crown Radius (m): 6 DBH (cm): 60 Trees: 3 Life Stage: Mature Life Exp.: 40+ Years	Group consists of two mature twin stem oak. Concrete beam in ground at base. Stilted buttress roots. Wire fence occluding into trunk. Bases clear, bark intact. No fungal fruiting bodies evident or audible decay. Pruning cuts on trunk from canopy lift. Light epicormic growth on trunks and branches. One trunk topped at 6m. Asymmetrical crown. Minor deadwood. Foliage density normal.	Fair	Public Amenity Value: Good Wildlife Value: Good	No works identified.
T084	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 19 Crown Radius (m): 10 DBH (cm): 60 Stems: 3 Life Stage: Mature Life Exp.: 40+ Years	Restricted access to base due to dense vegetation. Where accessible, base clear, bark intact. No fungal fruiting bodies evident. Three large stems from 1m. Pruning cuts on stems with good wound wood formation. High suppressed oval crown. Major deadwood over pupil accessible area. Foliage slightly sparse.	Fair	Public Amenity Value: Moderate Wildlife Value: Moderate	Remove deadwood. Timescale: 27-Jan-2026 (3 Months)
T085	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 17 Crown Radius (m): 4.5 DBH (cm): 55 Life Stage: Mature Life Exp.: 40+ Years	Mature oak with stilted roots. Vertical rib on lower trunk perhaps associated with old split in trunk. Good wound wood formation. Base clear, bark intact. No fungal fruiting bodies evident or audible decay. Single stem tree. High slender, suppressed crown. Pruning cuts on trunk associated with canopy lift. Sheltered location. Foliage density normal.	Fair	Public Amenity Value: Moderate Wildlife Value: Moderate	No works identified.
T086	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 17 Crown Radius (m): 6 DBH (cm): 55 Life Stage: Mature Life Exp.: 40+ Years	Mature oak. Base clear, bark intact. No fungal fruiting bodies evident or audible decay. Single stem tree. Swept stem to northeast. Adaptive growth at base. Slender, asymmetrical crown over neighbouring residential gardens. Pruning cuts with localised decay pockets on trunk associated with canopy lift. Sheltered location. Foliage density normal.	Fair	Public Amenity Value: Moderate Wildlife Value: Moderate	No works identified.
T087	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 17 Crown Radius (m): 7 DBH (cm): 75 Life Stage: Mature Life Exp.: 40+ Years	Bankside tree with pronounced, stilted buttress roots. Stump of felled tree at base. Base clear, bark intact. No fungal fruiting bodies evident or audible decay. Prolific epicormic growth on trunk. High, asymmetrical crown. Sizeable deadwood over playground. Foliage density normal.	Fair	Public Amenity Value: Good Wildlife Value: Good Inspection Limitations: Dense vegetation	Remove deadwood. Timescale: 27-Jan-2026 (3 Months)


Ref:	Species	Measurements	Survey Notes	Condition	Other Data	Recommendations
T088	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 17 Crown Radius (m): 7 DBH (cm): 55 Stems: 2 Life Stage: Mature Life Exp.: 40+ Years	Bankside tree with stilted buttress roots. Twin stem from 1m. Cup union fork. Where accessible, base clear, bark intact. No fungal fruiting bodies evident or audible decay. Prolific epicormic growth on trunk. High, asymmetrical crown. Sizeable deadwood over playground. Foliage density normal.	Fair	Public Amenity Value: Good Wildlife Value: Good Inspection Limitations: Dense vegetation	Remove deadwood. Timescale: 27-Jan-2026 (3 Months)
T089	Silver birch (<i>Betula pendula</i>)	Height (m): 8 Crown Radius (m): 0 DBH (cm): 32 Life Stage: Dead	Standing dead tree. Off-site tree. Decay present. Within falling distance of school. Fungus: Honey Fungus (<i>Armillaria mellea</i>)	Dead	Public Amenity Value: Low Wildlife Value: Good Inspection Limitations:	Fell to ground level. Timescale: 27-Jan-2026 (3 Months)
T090	Corkscrew willow (<i>Salix matsudana</i> ' <i>Tortuosa</i> ')	Height (m): 10 Crown Radius (m): 3 DBH (cm): 32 Life Stage: Dead	Standing dead tree. Swept stem. Asymmetrical crown. Within falling distance of school.	Dead	Public Amenity Value: Low Wildlife Value: Good Inspection Limitations: Access	Fell to ground level. Timescale: 27-Jan-2026 (3 Months)
T091	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 11 Crown Radius (m): 3 DBH (cm): 30 Life Stage: Early Mature Life Exp.: 40+ Years	Small oak within 2.5m of school building. Within gated area. No access to base. Swept stem. Asymmetrical crown. Minor deadwood in canopy. Foliage dense and even. Branch tips close to building.	Fair	Public Amenity Value: Moderate Wildlife Value: Moderate Inspection Limitations: Access	Cut back to create 1m canopy clearance to building. Timescale: 27-Oct-2026 (1 Year)
T092	Pedunculate oak (<i>Quercus robur</i>)	Height (m): 14 Crown Radius (m): 5 DBH (cm): 55 Life Stage: Dead	Standing ivy clad dead tree. Off-site tree. Decay present. Within falling distance of school.	Dead	Public Amenity Value: Low Wildlife Value: Good Inspection Limitations: Ivy	Fell to ground level. Timescale: 27-Jan-2026 (3 Months)

6 TREE WORKS IN PRIORITY ORDER

Ref:	Species	what3words (Location Identifier)	Recommendations	Work Timescale	Thumbnail
T014	Pedunculate oak (Quercus robur)	///cooks.issue.verbs	Remove deadwood and large declining branch back to healthy growth. Cut and remove 2x wire around lower trunk. Reduce height and northeast side of crown over neighbouring gardens by 2-2.5m and crown lift to create 2m canopy clearance over neighbouring outbuilding. Inspect structure of fork at the top of the vertical stem when climbing tree.	27-Nov-2025 (1 Month)	
T004	Pedunculate oak (Quercus robur)	///scare.pouch.indeed	Remove deadwood.	27-Jan-2026 (3 Months)	
T009	Pedunculate oak (Quercus robur)	///lied.talent.wells	Remove deadwood. Sever ivy.	27-Jan-2026 (3 Months)	
T019	Flowering cherry (Prunus Serrulata)	///stamp.middle.string	Fell to ground level.	27-Jan-2026 (3 Months)	
T035	Pedunculate oak (Quercus robur)	///lawn.quite.lodge	Remove deadwood over neighbouring garden.	27-Jan-2026 (3 Months)	
T052	Flowering cherry (Prunus Serrulata)	///decide.trips.grabs	Cut back lateral branches to create 1m canopy clearance to building.	27-Jan-2026 (3 Months)	

Ref:	Species	what3words (Location Identifier)	Recommendations	Work Timescale	Thumbnail
T055	Cultivar apple (Malus domestica)	///scarf.lovely.assist	Cut back lateral branches to create 1m canopy clearance to building.	27-Jan-2026 (3 Months)	
T061	Pedunculate oak (Quercus robur)	///mistaking.mainframe .suddenly	Remove large dead branch behind T062.	27-Jan-2026 (3 Months)	
T064	Pedunculate oak (Quercus robur)	///transmitted.intend.c hains	Remove deadwood.	27-Jan-2026 (3 Months)	
T065	Pedunculate oak (Quercus robur)	///puzzle.grew.lower	Remove deadwood.	27-Jan-2026 (3 Months)	
T068	Poplar (Populus sp.)	///beast.given.saints	Install protection around trunk to prevent children from stripping bark to allow tree time to callus over exposed wound site.	27-Jan-2026 (3 Months)	
T069	Pedunculate oak (Quercus robur)	///sounds.skinny.sake	Remove deadwood.	27-Jan-2026 (3 Months)	
T075	Pedunculate oak (Quercus robur)	///took.weeks.dined	Remove deadwood.	27-Jan-2026 (3 Months)	

Ref:	Species	what3words (Location Identifier)	Recommendations	Work Timescale	Thumbnail
T078	Pedunculate oak (Quercus robur)	///define.clubs.button	Remove deadwood.	27-Jan-2026 (3 Months)	
T081	Pedunculate oak (Quercus robur)	///quit.free.stages	Remove deadwood.	27-Jan-2026 (3 Months)	
T084	Pedunculate oak (Quercus robur)	///plus.rank.crib	Remove deadwood.	27-Jan-2026 (3 Months)	
T087	Pedunculate oak (Quercus robur)	///vanish.adults.others	Remove deadwood.	27-Jan-2026 (3 Months)	
T088	Pedunculate oak (Quercus robur)	///left.exists.port	Remove deadwood.	27-Jan-2026 (3 Months)	
T089	Silver birch (Betula pendula)	///risk.frost.skill	Fell to ground level.	27-Jan-2026 (3 Months)	
T090	Corkscrew willow (Salix matsudana 'Tortuosa')	///nuns.ideal.neat	Fell to ground level.	27-Jan-2026 (3 Months)	

Ref:	Species	what3words (Location Identifier)	Recommendations	Work Timescale	Thumbnail
T092	Pedunculate oak (Quercus robur)	///video.excuse.video	Fell to ground level.	27-Jan-2026 (3 Months)	
T001	Pedunculate oak (Quercus robur)	///punk.couch.asking	Sever ivy and remove any deadwood.	27-Apr-2026 (6 Months)	
T002	Pedunculate oak (Quercus robur)	///punk.couch.asking	Sever ivy and remove any deadwood.	27-Apr-2026 (6 Months)	
T027	Tulip tree (Liriodendron tulipifera)	///bowls.weedy.other	Remove deadwood.	27-Apr-2026 (6 Months)	
T029	Pedunculate oak (Quercus robur)	///jumpy.reward.listed	Remove deadwood over neighbouring garden.	27-Apr-2026 (6 Months)	
T070	Pedunculate oak (Quercus robur)	///odds.undulation.guards	Remove deadwood.	27-Apr-2026 (6 Months)	
T079	Pedunculate oak (Quercus robur)	///fines.unrealistic.drive	Sever ivy.	27-Apr-2026 (6 Months)	

Ref:	Species	what3words (Location Identifier)	Recommendations	Work Timescale	Thumbnail
T080	Pedunculate oak (Quercus robur)	///grow.sobs.forest	Sever ivy.	27-Apr-2026 (6 Months)	
T082	Pedunculate oak (Quercus robur)	///slice.closes.saves	Remove deadwood over neighbouring garden.	27-Apr-2026 (6 Months)	
T022	Cultivar apple (Malus domestica)	///king.melt.bound	Sever ivy prior to next inspection.	27-Oct-2026 (1 Year)	
T028	Osier x10 (Salix viminalis)	///tolls.update.fixed	Restructure willow sculpture with removal of deadwood and removal /reduction of large woody stems and retraining younger, more pliable stems to form archway.	27-Oct-2026 (1 Year)	
T057	Laurel cherry (Prunus laurocerasus)	///local.unless.bucks	Fell to ground level.	27-Oct-2026 (1 Year)	
T059	Hazel x5 (Corylus avellana)	///chairs.headings.chins	Coppice all stems just above ground level - see notes in survey data.	27-Oct-2026 (1 Year)	
T091	Pedunculate oak (Quercus robur)	///nuns.ideal.neat	Cut back to create 1m canopy clearance to building.	27-Oct-2026 (1 Year)	

7 SITE PLAN

