


External view of property damage



Impact point of Vehicle, 14m² of brickwork to be replaced

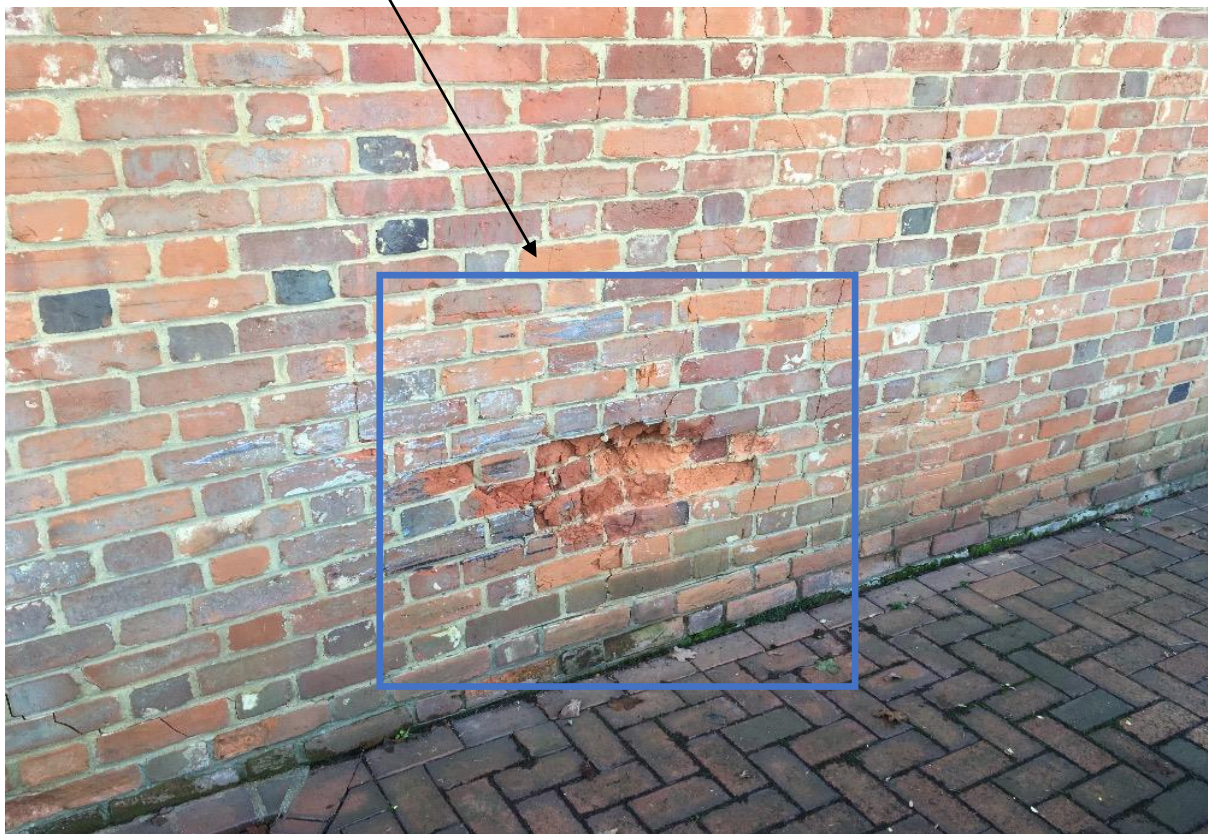

Proposed Schedule of Works for Masonry

- Arrange for warning signs, safety barriers and cones where necessary to segregate the area whilst the repairs are being carried out.
- Provide protections to flooring where required whilst the works are being carried out (throughout all working rooms and externally)
- Obtain all necessary permissions from the local heritage department.
- Take delivery of and site Portaloo, skip and materials, flooring to be protected as required.
- Erect and install necessary access equipment to side elevation to damaged area.
- Remove no more than 12m² of vertical hanging tiles, set aside for later reinstatement.
- Examine masonry to rear of exposed tiled area, and report back for any unseen damages.
- Install all necessary props and strongboys to damaged elevation.
- Deconstruct no more than 14m² of damaged masonry on the external elevation, set aside bricks for disposal.
- Remove any insulation and set aside for future reinstatement.
- Inspect any blockwork to rear of exposed 9inch wall, report back for any repairs needed.
- Rebuild previously taken down brickwork, in a lime mortar using newly sourced reclaimed bricks to match the existing style, colour and dimensions as close as reasonably possible, incl. supply and install of all necessary wall ties. Brickwork to match existing Flemish bond.
- Rake out any remaining cracks to return wall, and install helibars as per manufacturer instructions and point up.
- Reinstatement previously set aside vertical hanging tiles to previous location, sourcing newly acquired reclaimed tiles to match existing