

Side Elevation | Front Elevation | Side Elevation

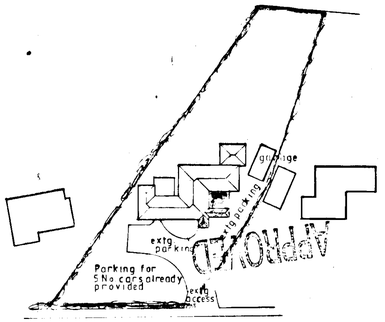

School Road

Block Plan Scale 1-500

15.MAR2001 • 3571

Note.
2 No. extg. Bedrooms in Bungalow
1 No. extg. Bedroom in
Granny Annex

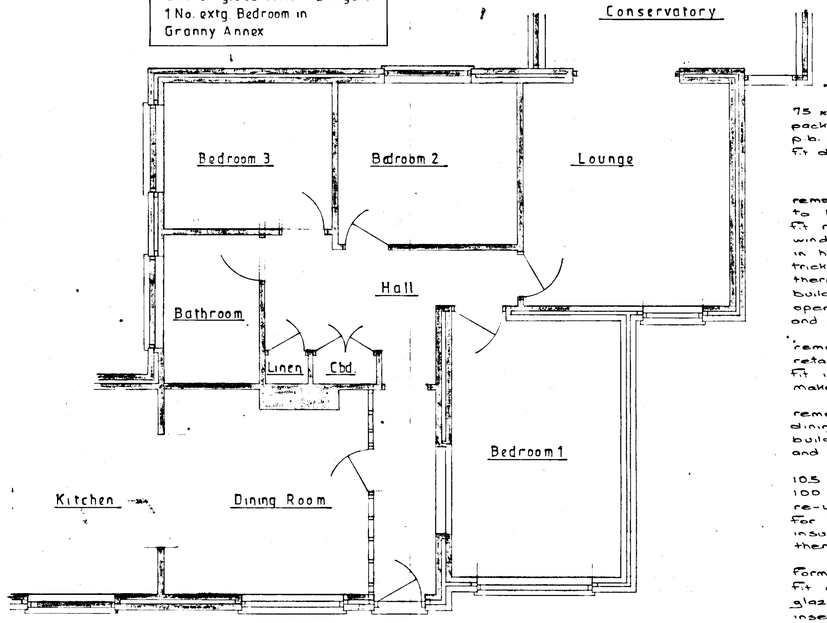

Floor Plan

75 x 50 stud partition to extend hall
pack with quilt insulation
p.b. and skim both sides
fit door and frame

remove extg. front window frame
to lounge retain extg. lintel over
fit new double glazed white upvc
window frame with slot ventilator
in head of frame to provide 8000mm²
trickle ventilation
thermabate cavity closers
build up remaining part of
opening with 2no. 100 block skins
and plaster both sides

remove extg. front door and frame
retain extg. lintel over
fit internal door and frame
make good plaster etc.

remove side window frame to original
dining room retain extg lintel over
build up opening with 100 block
and plaster both sides

105 facing brickwork, 50 dritherm
100 thermalite block and plaster
re-use extg. double glazed window
for bedroom 1
insulated catnic lintel over
thermabate cavity closers

form opening in front wall and
fit door and frame door double
glazed with safety glass
insert catnic lintel over
thermabate cavity closers
make good plaster etc.

d.p. into 100 dia. drain and to
soakaway min. 5000 from building

Proposed Alterations and Extension to form Bedroom at

Pype Hayes' School Road, Barkham, Berks.

For Mr. B. and Mrs. M. Smith

Scales 1-50 and 1 — 100 February 2001
Amended March 2001